

University of Groningen

Building the Bronze Age

Wiersma, Corien

IMPORTANT NOTE: You are advised to consult the publisher's version (publisher's PDF) if you wish to cite from it. Please check the document version below.

Document Version

Publisher's PDF, also known as Version of record

Publication date:

2013

[Link to publication in University of Groningen/UMCG research database](#)

Citation for published version (APA):

Wiersma, C. (2013). *Building the Bronze Age: architectural and social change on the Greek Mainland during Early Helladic III, Middle Helladic and Late Helladic I*. s.n.

Copyright

Other than for strictly personal use, it is not permitted to download or to forward/distribute the text or part of it without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license (like Creative Commons).

The publication may also be distributed here under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license. More information can be found on the University of Groningen website: <https://www.rug.nl/library/open-access/self-archiving-pure/taverne-amendment>.

Take-down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Downloaded from the University of Groningen/UMCG research database (Pure): <http://www.rug.nl/research/portal>. For technical reasons the number of authors shown on this cover page is limited to 10 maximum.

BUILDING THE BRONZE AGE

Architectural and Social Change on the Greek Mainland
during Early Helladic III, Middle Helladic and
Late Helladic I

Volume 2

Cover design: Siebe Boersma, GIA, Groningen
Book design: Hannie Steegstra, Drachten

Financial support: Stichting Nederlands Museum voor Anthropologie en Praehistorie
Stichting Houckema-leen
University of Groningen / Groningen Institute of Archaeology

Production: Roelf Barkhuis www.barkhuis.nl

© 2013 Corien Wiersma

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage or retrieval system, without permission in written form from the author.



**university of
groningen**

**groningen institute
of archaeology**

RIJKSUNIVERSITEIT GRONINGEN

BUILDING THE BRONZE AGE

Architectural and Social Change on the Greek Mainland
during Early Helladic III, Middle Helladic and
Late Helladic I

Catalogues

Cornelia Wilhelmina Wiersma

Contents of volume 2

Introduction to the catalogues	279
Catalogue A Thessaly	280
Catalogue B Phocis and Phthiotis	340
Catalogue C Boeotia	362
Catalogue D Euboea.....	394
Catalogue E Attica	400
Catalogue F Corinthia	432
Catalogue G Argolid.....	440
Catalogue H Laconia.....	528
Catalogue J Messenia	534
Catalogue K Elis	542
Catalogue L Arcadia	550
Catalogue M Achaia.....	560

Introduction to the catalogues

What follows now are the catalogues accompanying Chapter 3. A description of the catalogue entries is given in Chapter 2.6.3, but is repeated here, for ease of reference for the reader:

Most of the catalogue entries are descriptive. First an impression is given of the **preservation** and uncovering of a house.

In cases where the **desertion** of a house is not specifically discussed in publications, the entry ‘presumably deserted?’ was made.

The **orientation** of houses is limited to N-S, NE-SW, NW-SE and E-W. Which way the apse faced is mentioned. However, often it remained unclear which was the front and which was the back of a house and from which side the house was entered.

The **layout** of the house includes a description of the house shape and minimum number of rooms.

The **size** includes the total internal size of the house and, if possible, internal measurements of individual rooms. In cases where the house was not entirely preserved or uncovered, the uncovered area is mentioned, for example ‘at least 40+ m²’. Measurements were taken from the publication, or inferred from published plans.

The **field walls** includes a description of the construction, width and preserved height of walls, but is usually limited to the foundations. Most walls were made of mud bricks placed on stone foundations, but mud bricks were usually not preserved. The listed width and height of the walls were of course dependent on the state of preservation of the remains. Descriptions and measurements were taken from the publication or inferred from published plans.

The next four fields (modifications, floor, furnishings, finds) are for various reasons often left empty. **Modifications** on houses can be difficult to observe and may have gone unnoticed, especially during excavations carried out a long time ago.

Floors can also be difficult to observe during excavation. Only micromorphology can give a good indication of the existence of, and number of, floors. However, micromorphology has so far barely been used in the study of houses. When floors were observed, they were not always described in publications.

Furnishings are prone to destruction during the modification, desertion or collapse of buildings, and during later building practices. In addition, organic material, such as wooden shelves, or clay features, such as mud brick superstructures or clay hearths, are often not preserved in the archaeological record.

Finds were not always ascribed to houses, especially in the case of brief or preliminary reports. Furthermore,


not all finds were retained and published. Finally, it can be hard to ascribe finds to either the living floor of the house or the fill covering the floor after desertion of the house. The field ‘finds’ should therefore be considered an impression of recovered finds, rather than a complete and detailed overview.

The **field activities** is often given the description ‘presumably all household activities’. An assessment of activities is related to number of rooms, furnishings and finds, but data on the latter two are often left wanting. If possible, storage and cooking activities are ascribed to a room or area. In cases where the catalogue entry pertains to a structure rather than a house, this field is used to suggest the possible auxiliary use of the structure.

The **date** of the house is given as securely as possible. In addition, reference is sometimes made to a specific settlement phase, for example, Lerna IV.

The main bibliographic references are listed in the final entry. This should not, however, be considered an exhaustive bibliography of a specific house.



Each table is accompanied by an **illustration** of the house remains. This is a digitized version of a published plan, which is scaled 1:100 and oriented north, unless indicated otherwise. A reference is given to the publication of the illustration used for the digitized version. The digitizing, scaling and (re)orientation of the plans facilitates visual comparison of the remains. In cases where minor modifications were carried out, different colours are used in the plan to render later walls and furnishings. In cases of extensive modifications, multiple tables and illustrations are used. Furnishings are illustrated in the plans, and are sometimes standardized (see legend). The only finds illustrated are in-situ storage vessels, as these can sometimes affect architectural features. For example, small, rounded walls were constructed at Eutresis structure GQ (catalogue C11) to support storage vessels.

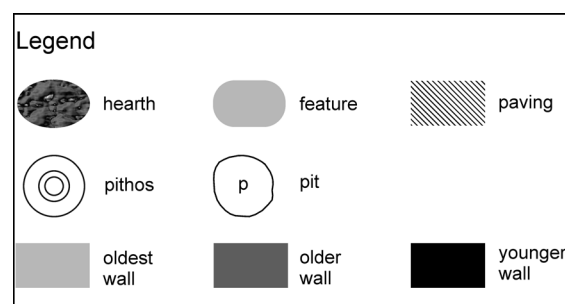

Catalogue A Thessaly

A01 Argissa house A	
Preservation	Moderately well preserved, the south-western part was eroded, and the northern part was not completely excavated.
Desertion	Destroyed by a fire.
Orientation	NE–SW
Lay-out	Unclear, but the house was internally partitioned and had an outdoor cooking area.
Size	Ca. 39 m ² (6.00 x 6.40 m) uncovered, but the house was larger.
Walls	Postholes along the north-western trench wall were 0.20 m in diameter, while the others were 0.15 m in diameter and placed 1.50 m apart. Wattle-and-daub walls.
Modifications	An additional hearth was constructed.
Floor	Clay floor
Furnishings	Storage closet along the north-western wall, made of vertically placed clay bricks, 1.10 x 0.80 m. Stones on either side of the closet were perhaps used as supports. A hearth was located in the centre of the room. An extension of the house in the east was furnished with two hearths/ovens and shielded with a screen. Outside the house, on the south-eastern side was a bothros. Later a rectangular hearth was constructed in the south-western part of the room.
Finds	Three jugs, two amphorae, two wide mouthed jars (perhaps cooking vessels?), and a storage vessels. Six terracotta anchors, two stone grinders. Bothros: fragments of eighth amphorae, two askoi, eight bowls, one jug, 1 pithos and three vessels, primarily made of fine and medium ware.
Activities	Presumably all household activities. Storage might have been kept in the north-eastern part of the house, opposite the outdoor storage, as here many sherds were recovered as well as a strongly burnt layer.
Date	EH III, late EBA
References	Hanschmann and Miložčić 1976
Illustration	After Hanschmann and Miložčić 1976, Tafel E II

A02 Argissa house B	
Preservation	Poorly preserved, most of the house was eroded away.
Desertion	Destroyed by fire.
Orientation	NE–SW
Lay-out	Unclear, perhaps rectangular with an apsidal attached cooking area.
Size	At least 21 m ² uncovered (7.00 x 3.00 m)
Walls	Postholes of 0.10-0.12 m diameter, placed close together. Wattle-and-daub walls
Modifications	The clay floor was renewed at least once. The hearth in the east was made later. It seems that the eastern part of the house was affected by flooding, so the wall needed repairing.
Floor	Clay floor
Furnishings	Hearth in the main room. Remains of stone paving, perhaps for the support of an upper structure. A hearth in the eastern part of the houses was added later. Outside, north-west of the house was another hearth and beside it a stone platform/paving. This seems to have been an outdoor cooking area.
Finds	Inside: two bowls, a lid, one pan, one vessel, and two wide mouthed jars. Cooking area: amphora, three jugs, a pan, two vessels, two wide mouthed jars, three rubbers.
Activities	Presumably all household activities.
Date	EH III, late EBA
References	Hanschmann and Miložčić 1976
Illustration	After Hanschmann and Miložčić 1976, Tafel E II

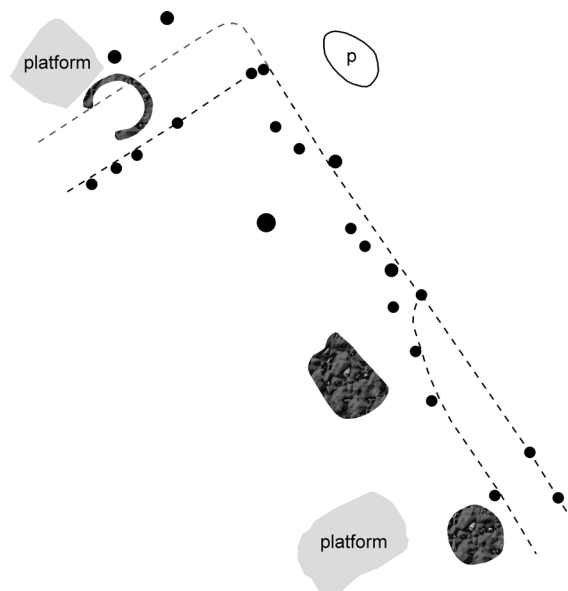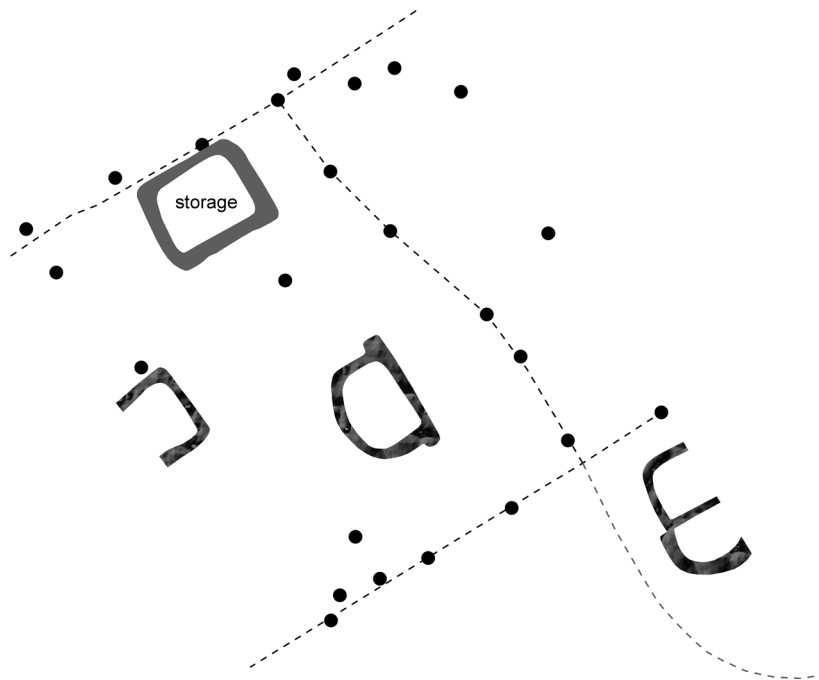

Ao3 Argissa house 1




Preservation	Only the northern part of the house was preserved, the southern part was eroded.
Desertion	No traces of fire or destruction. Presumably deserted.
Orientation	NE–SW, with the apse in the north-west.
Lay-out	Apsidal, at least two rooms.
Size	At least 15 m ² uncovered Apse 3.20 x 1.20 m Main room 3.20 x 3.60 m
Walls	Foundation was made of stone, ca. 0.20 m wide, and the wall was constructed of elongated mud bricks. Two post-holes were recovered, probably for support of the roof.
Modifications	-
Floor	Stamped clay, and in the apse paved with flat mud bricks.
Furnishings	Hearth
Finds	Fragments of three bowls, two cups, an amphora and a jug, two terracotta spindle whorls and a bone needle.
Activities	Presumably all household activities.
Date	EH III, Argissa MBA phase 1
References	Hanschmann and Milošević 1976
Illustration	After Hanschmann and Milošević 1976, Tafel E I

Ao4 Argissa house 2

Preservation	Only the northern part of the house is preserved. The southern part is eroded.
Desertion	No traces of fire or destruction.
Orientation	NE–SW
Lay-out	Possibly rectangular/parallelogram. At least two rooms, separated by a lengthwise partition wall made of mud bricks.
Size	At least 10 m ² uncovered (3.50 x 2.80 m).
Walls	Mud brick foundation, ca. 0.25 m wide, and not well built. Two postholes in the NE part of the house, probably for support of the roof. A third posthole was located outside on the nw, perhaps marking an entrance area?
Modifications	-
Floor	Stamped yellow clay
Furnishings	In the north-eastern and south-western part of the building was stone paving, perhaps used as base for storages.
Finds	Fragments of a bowl, a jug and seven other vessels, which were perhaps cooking vessels. Two terracotta spindle whorls.
Activities	Presumably all household activities.
Date	EH III, Argissa MBA phase 1
References	Hanschmann and Milošević 1976
Illustration	After Hanschmann and Milošević 1976, Tafel E I

Ao5 Argissa house 3

Preservation	Only the northern part of the house is preserved. The southern part is eroded.
Desertion	No traces of fire or destruction.
Orientation	NE–SW
Lay-out	Possibly rectangular/parallelogram. A wall stub and a posthole perhaps partitioned off a corner of the house
Size	At least 9 m ² uncovered (3.60 x 2.60 m).
Walls	Ca. 0.40 m wide and made of mud bricks which were dissolved. Perhaps two rows of mud bricks were used to construct the wall, considering the width of the wall. Possibly more postholes were located in the northern corner, but these were not published on the plan.
Modifications	-
Floor	Stamped yellow clay
Furnishings	-
Finds	Fragments of two bowls, three cups, jug and an amphora. The jug is Cycladic. A horn hammer, and three terracotta spindle whorls.
Activities	Presumably all household activities.
Date	EH III, Argissa MBA phase 1
References	Hanschmann and Milošević 1976
Illustration	After Hanschmann and Milošević 1976, Tafel E I


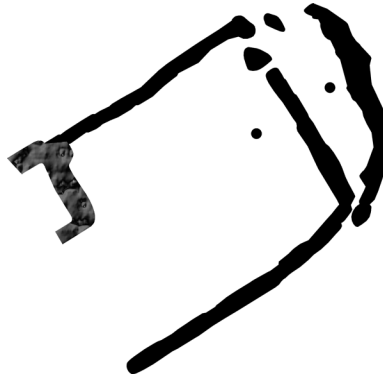


Ao6 Argissa house 4A

Preservation	Moderately preserved, the sw part was eroded.
Desertion	Restructured into house 4B during the next phase.
Orientation	NE–SW, entrance presumably in the sw.
Lay-out	Probably rectangular. At least one room.
Size	At least 51 m ² uncovered (7.10 x 7.20 m)
Walls	Bottom of fundament made of large stones, ca. 0.40-0.70 m wide, followed by walls of smaller stones preserved up to 1.00 m. Postholes were positioned in the middle of the room and in the walls. These were presumably used to support the roof and strengthen the walls.
Modifications	Improvements and restructuring of the walls took place, but these were not discussed. The clay floor was once renewed. Restructured into house 4B during the next phase
Floor	Clay floor, two were identified.
Furnishings	Large storage inside the house. This was made out of mud bricks, placed on a stone grid made of parallel stone walls.
Finds	Fragments of an amphora, twelve bowls, a cooking vessels, and perhaps three more cooking vessels, five cups, a double cup, five to eight jugs, a pan, a pithos and a storage vessels. Bone awl, three stone axes, a terracotta bullet, two stone rubbers, two terracotta spindle whorls, and a terracotta weaving weight.
Activities	Presumably all household activities.
Date	EH III, Argissa MBA phase 2
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel F

Ao7 Argissa house 6

Preservation	Not well preserved, almost the whole house was eroded.
Desertion	Presumably deserted. Overbuilt by house 7A in the next phase.
Orientation	NE–SW, entrance in the ne.
Lay-out	Perhaps rectangular? At least one room. Court in front of the house, which was paved.
Size	At least 4 m ² uncovered (1.60 x 2.60 m).
Walls	Made of small and large irregular laid stones, presumably set in mud. At least 0.40 m wide.
Modifications	During this phase, the northern ante wall is lengthened to partition off the court. This court is also paved with stones.
Floor	Stone paved entrance. Presumably a clay floor.
Furnishings	Hearth in the room might be contemporary or younger.
Finds	House: fragments of three cups, four bowls, a pan and a storage vessel, a shell pendant, a stone rubber and a terracotta spindle whorl. Court: fragments of two bowls and two cups
Activities	Presumably all household activities.
Date	EH III, Argissa MBA phase 2
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel F

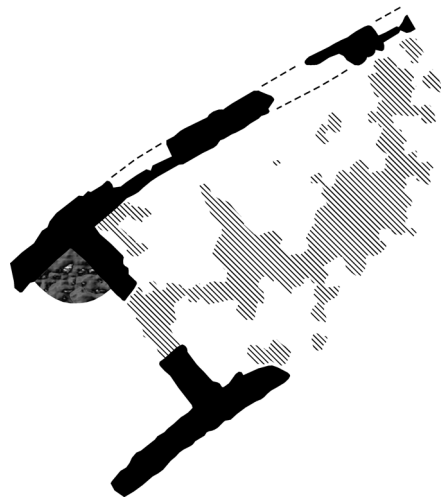
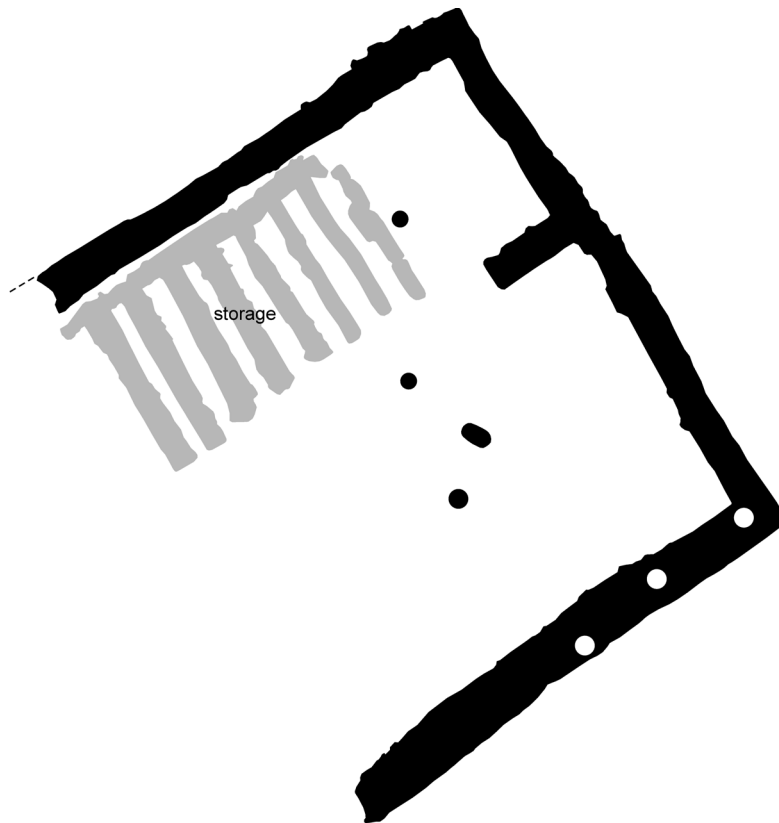


Ao8 Argissa house 4B

Preservation	Moderately preserved: stone were pulled out and the south-western part was eroded away.
Desertion	Presumably deserted. Overbuilt by houses 10 and 11 during the next phase.
Orientation	NE–SW, entrance presumably in the south-west.
Lay-out	Perhaps rectangular? At least one room.
Size	At least 54 m ² uncovered (7.50 x 7.20 m).
Walls	Made of stone walls, ca. 0.40–0.70 m wide, placed on top of the walls of house 4A. Postholes were located in a wall, presumably for support of the roof.
Modifications	-
Floor	Stamped clay floor.
Furnishings	Storage, but smaller than during the previous phase. It was constructed out of mud bricks on top of four parallel stone walls.
Finds	Fragments of two amphoras, 18 bowls, three possible cooking vessels, seven cups, seven jugs, a pan, a pithos, a possible storage vessel, and a wide mouthed vessel. Terracotta anchor and bobbin, a horn hammer, a bone needle, five terracotta spindle whorls, and a terracotta weaving weight.
Activities	Presumably all household activities.
Date	EH III, Argissa MBA phase 3
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel E



Ao9 Argissa house 7A

Preservation	Poorly preserved, large parts of wall were missing, and the north-eastern part was not uncovered.
Desertion	Restructured into house 7B during the next phase.
Orientation	NE–SW, entrances in the south-west and north-west.
Lay-out	Perhaps rectangular? Traces of charcoal were probably part of a wooden partition, dividing the area into two rooms.
Size	At least 30 m ² uncovered (7.30 x 4.20 m).
Walls	Fundament made of large stones, ca. 0.40–0.80 m wide, on which dried mud bricks were placed.
Modifications	The floor was renewed once. The house was restructured into house 7B1 during the next phase.
Floor	Stamped clay, the two entrances were paved with stones. At least two floors were identified in the profile.
Furnishings	A storage closet made of bricks placed on parallel stone walls, and a hearth were located in the eastern room. Three circular patches are visible on the plan, but these were not discussed in the publication.
Finds	Fragments of eight bowls, four cups, a ladle cup, a pan, a pithos and four vessels. A bone awl, two horn hammers, a horn polisher, terracotta sling bullet and six spindle whorls, and a terracotta weaving weight.
Activities	Presumably all household activities.
Date	EH III, Argissa MBA phase 3
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel E

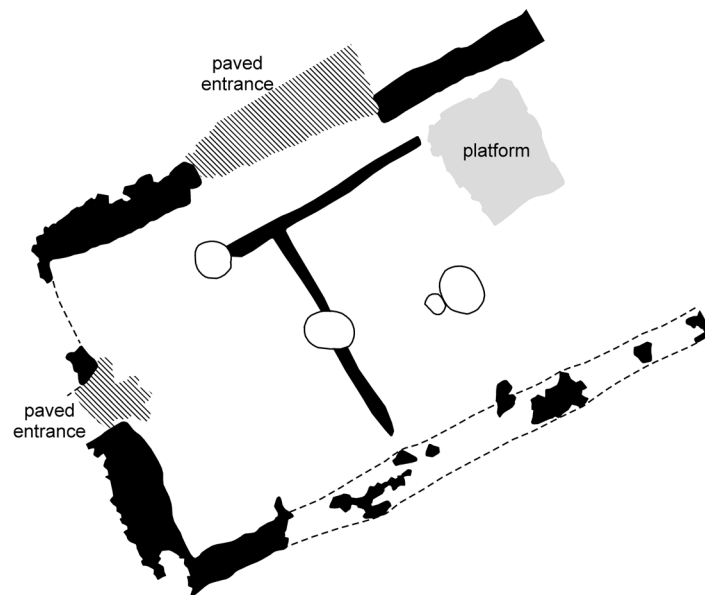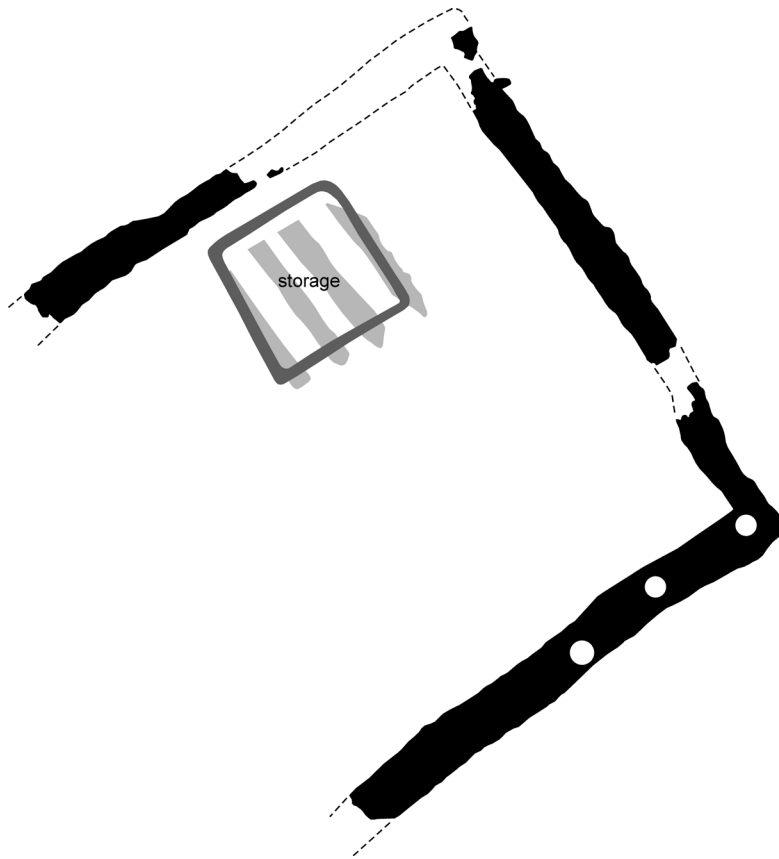



A10a Argissa house 7B1	
Preservation	See A10b
Desertion	Modified, see A10b
Orientation	NE–SW, entrance apparently in the west (though this is not clearly reflected in the published plan).
Lay-out	Perhaps rectangular? At least one room.
Size	At least 29 m ² uncovered (7.20 x 4.00 m)
Walls	Made of large stones, placed in two close rows.
Modifications	Construction of a partition wall and a hearth in the centre of the room. Perhaps a new floor was made? More major refurbishing took also place, see A10b.
Floor	At least three floors were identified, made of stamped clay. Two floors were ascribed to the first and second construction phase (see A10b), but it is unclear to which construction phase the third floor should be ascribed.
Furnishings	First: two mud brick cists in the east, two hearths in the centre and a hearth in the SW Later: another hearth is created in the centre, and a short partition wall is constructed.
Finds	All finds published probably belong to the next use phase, see A10b.
Activities	Presumably all household activities.
Date	MH I, Argissa MBA phase 4
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel D

A10b Argissa house 7B2	
Preservation	Poorly preserved walls. Internal structures reasonably well preserved
Desertion	Destroyed in a fire. Afterwards the area was levelled and stones pulled out. This house is however rebuilt as house 13 during the next phase.
Orientation	NE–SW, entrance apparently in the west (though this is not clearly reflected in the published plan).
Lay-out	Perhaps rectangular? At least one room.
Size	At least 29 m ² uncovered (7.20 x 4.00 m)
Walls	Made of large stones, placed in two close rows, ca. 0.50 m wide.
Modifications	After a while, one of the storages was replaced by a new storage, and a new hearth was in use at the same time. Perhaps a new floor was constructed. After fire destruction the house was rebuilt, see A14a.
Floor	At least three floors were identified, made of stamped clay. Two floors were ascribed to the first and second construction phase (see A10a), but it is unclear to which construction phase the third floor should be ascribed.
Furnishings	First: Two storages. Later: One of the storages is replaced by a new storage, and a new hearth is in use at the same time.
Finds	Fragments of an amphora, 18 bowls, five possible cooking vessels, 47 cups, four jugs, two pithoi, eight scoops, three storage vessels and three other vessels. A bone awl and spatula, a pierced horn axe, two horn hammers, a terracotta bobbin, a cone snail, a terracotta lid(?) and plate, stone polisher, five terracotta spindle whorls and a weaving weight.
Activities	Presumably all household activities.
Date	MH I, Argissa MBA phase 4
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel D

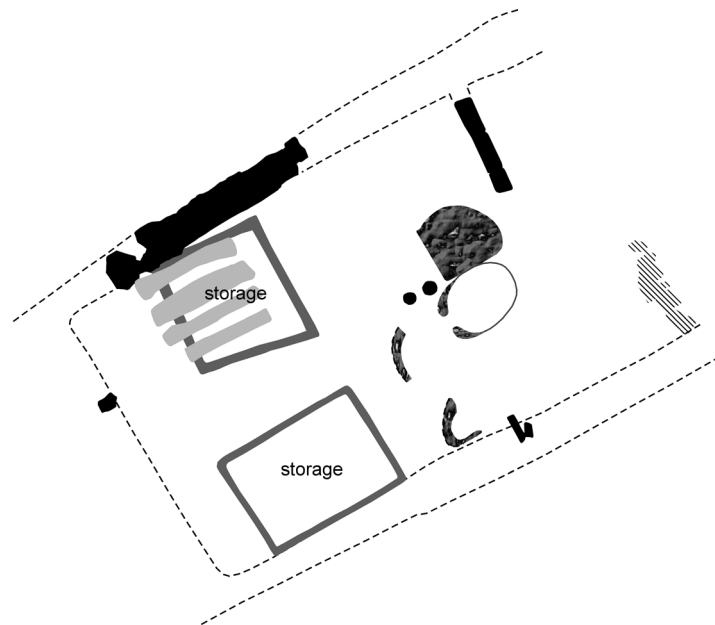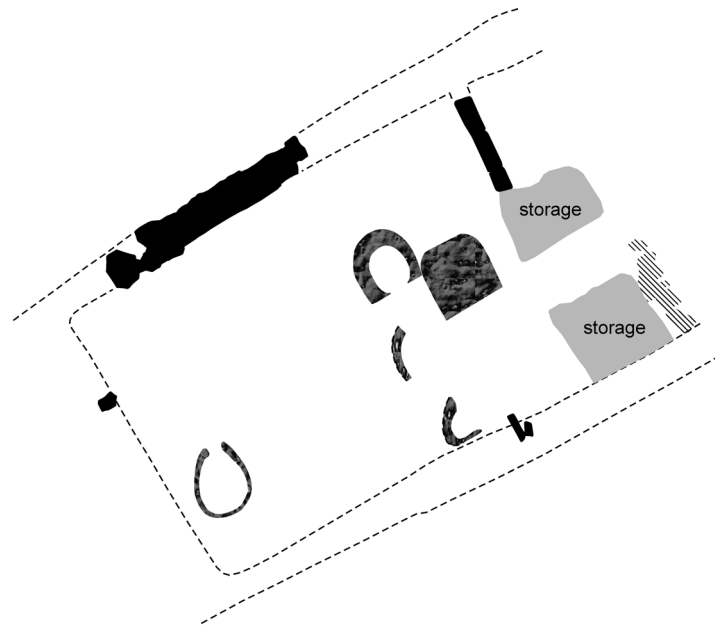



A11 Argissa house 10	
Preservation	Poorly preserved walls, the northern wall is largely robbed out. Internal structures reasonably well preserved
Desertion	Destroyed in a fire. Afterwards the area was levelled and stones pulled out.
Orientation	NE–SW
Lay-out	Perhaps rectangular? At least one room.
Size	At least 34 m ² uncovered (7.90 x 4.30 m).
Walls	Irregular laid walls, ca. 0.50 m wide. The southern wall was made of two rows of small stones placed apart and here and there filled in with other stones. The northern wall was made of irregular laid, but larger, stones.
Modifications	-
Floor	A part of the floor was plastered with sherds, the remainder was made of stamped clay.
Furnishings	Two storage structures made of mud bricks on stone grid. East and partly below one of the storages laid a sherd plastered area.
Finds	Fragments of four bowls, six cups, three jugs and a pan. Two bone awls, a stone axe, a terracotta bobbin(?), a cone/lid(?), a bone needle and tool, and four terracotta spindle whorls.
Activities	Presumably all household activities.
Date	MH I, Argissa MBA phase 4
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel D

A12 Argissa house 11	
Preservation	Walls were poorly preserved, as all the stones were pulled out.
Desertion	Destroyed in a fire. Afterwards the area was levelled and stones were pulled out.
Orientation	NE–SW
Lay-out	Perhaps rectangular? At least two rooms, as a small part of a partition walls was recovered.
Size	At least 19 m ² uncovered Room 1 6.60 x 2.90 m Room 2 0.50 x 2.80 m
Walls	Unclear, as all the stones were pulled out.
Modifications	-
Floor	Clay floor
Furnishings	One storage structure and a round hearth.
Finds	Fragments of an amphora, two bowls, a possible cooking vessel, eight cups, a pan and a storage vessel. A bone needle, a stone polisher and three terracotta spindle whorls.
Activities	Presumably all household activities.
Date	MH I, Argissa MBA phase 4
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel D

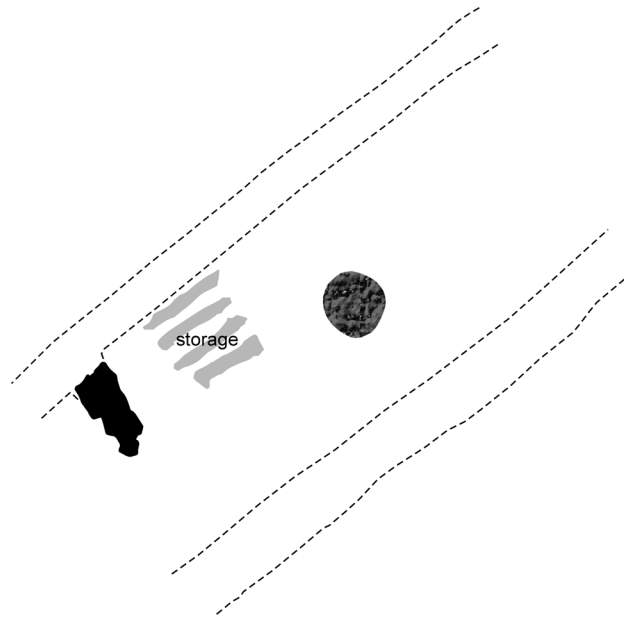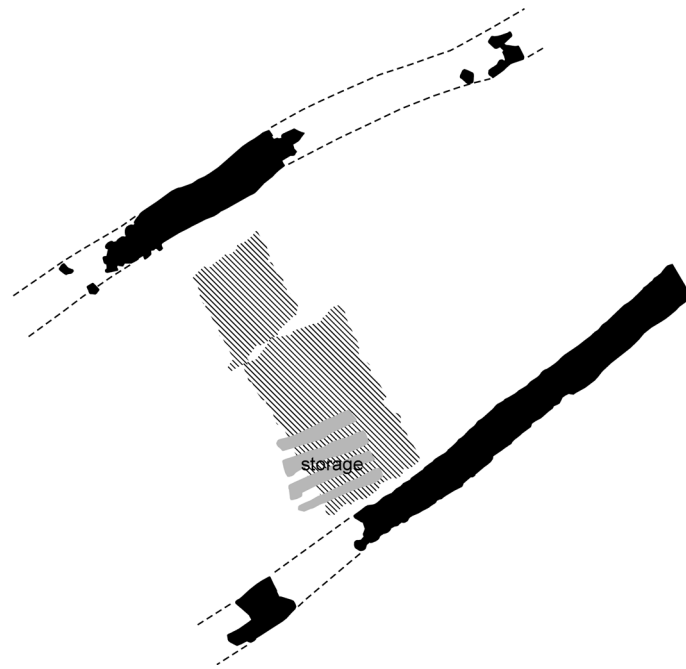

A13 Argissa house 12	
Preservation	Walls and internal structures were well preserved. However, the house was not entirely uncovered.
Desertion	Destroyed in a fire. Afterwards the area was levelled and some stones were pulled out.
Orientation	NE–SW
Lay-out	Perhaps rectangular? At least one room.
Size	At least 35 m ² uncovered (7.70 x 4.60 m)
Walls	Two rows of small stones, placed apart. Ca. 0.40-0.50 m wide.
Modifications	The floor was renewed at least once.
Floor	The two floors identified are both made of stamped clay.
Furnishings	Two storages and a horseshoe shaped hearth. A clayey patch of unclear use was located in the centre of the room. The stone base of a third storage was visible in the north-eastern profile. Two extensions were attached to the se wall; perhaps these were used as storage areas.
Finds	Fragments of nine bowls, ten cups and a pan. A stone axe and polisher, three terracotta spindle whorls and two weaving weights.
Activities	Presumably all household activities.
Date	MH I, Argissa MBA phase 4
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel D




A14a Argissa house 13A	
Preservation	See A14B
Desertion	Modified, see A14B
Orientation	NE–SW
Lay-out	Perhaps rectangular?
Size	At least 38 m ² uncovered (7.20 x 5.20 m)
Walls	Fundament of small and medium sized stones, irregular placed, ca. 0.40-0.50 m wide. On top traces of mud brick wall.
Modifications	Four different floor layers were identified in house 13, but it remains unclear in the publications how many floors should be ascribed to this phase or the next. After a while a major refurbishing took place, see A14b.
Floor	Clay floor, but a part of the floor was plastered with stones.
Furnishings	A hearth, a pithos dug into the floor, and a rectangular mud brick platform, which was perhaps used for cooking purposes.
Finds	Finds presumably belong to the last phase of use of the house, see A14b.
Activities	Presumably all household activities.
Date	MH I, Argissa MBA phase 5
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel C

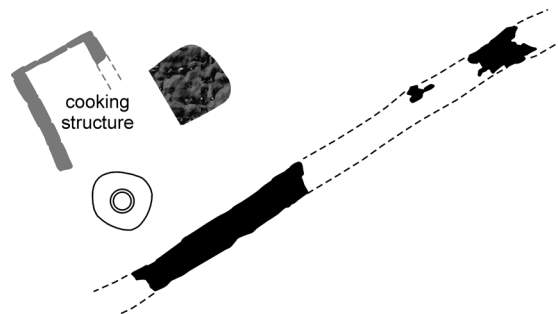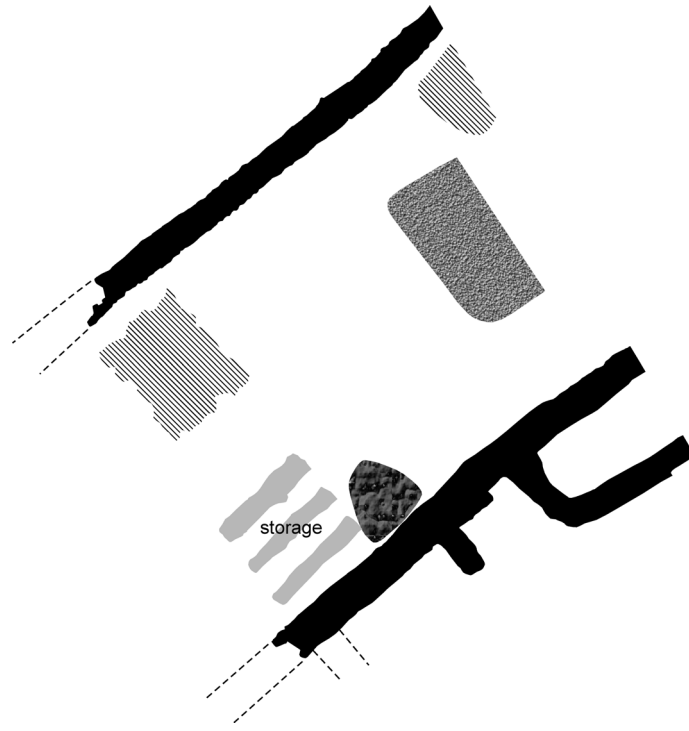

A14b Argissa house 13B	
Preservation	Not well preserved, few stones of the walls remain.
Desertion	Overbuilt by various structures during the next phase.
Orientation	NE–SW
Lay-out	Perhaps rectangular?
Size	At least 38 m ² uncovered (7.20 x 5.20 m)
Walls	Fundament of small and medium sized stones, irregular placed, ca. 0.40-0.50 m wide. On top traces of mud brick wall.
Modifications	Four different floor layers were identified in house 13, but it remains unclear in the publications how many floors should be ascribed to this phase or the previous.
Floor	Clay floor.
Furnishings	A new hearth was constructed, as well as two pits. Two walls were built inside the room, one of which overbuilt the mud brick platform. Along the southern of these walls, remains of a child burial were located under a fragment of a small pithos.
Finds	Fragments of an amphora, 11 bowls, 21 cups, two possible cooking vessels, two large pans, a pithos, and two storage vessels. A terracotta anchor, a bobbin, five spindle whorls and two weaving weights, two bone needles and two awls, and a stone polisher
Activities	Presumably all household activities. Perhaps the final use phase represented a desertion of the house, whereby it was turned into a working area. This might explain the construction of two walls during this phase.
Date	MH I, Argissa MBA phase 5
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel C

A15a Argissa house 15A	
Preservation	See A15B
Desertion	Modified, see A15B
Orientation	NE–SW
Lay-out	Perhaps rectangular?
Size	At least 23 m ² uncovered (5.30 x 4.3 m)
Walls	Two rows of small stones, placed apart in one wall, and placed close together in the other wall. Ca. 0.30-0.50 m wide.
Modifications	See A15b
Floor	Stamped clay floor.
Furnishings	A storage in the north-eastern corner, constructed on top of a mud brick plaster. Towards the west a second storage, with stone plaster beside it.
Finds	Finds presumably belong to the final phase of the house, see A15b.
Activities	Presumably all household activities.
Date	MH I, Argissa MBA phase 5
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel C

A15b Argissa house 15B	
Preservation	Poorly preserved walls, the southern wall was robbed out, and the south-western part of the house was eroded.
Desertion	Rebuilt as house 21 during the next phase.
Orientation	NE–SW
Lay-out	Perhaps rectangular?
Size	At least 23 m ² uncovered (5.30 x 4.30 m)
Walls	Two rows of small stones, placed apart in one wall, and placed close together in the other wall. Ca. 0.30-0.50 m wide.
Modifications	-
Floor	Stamped clay floor.
Furnishings	The storage in the north-western corner was replaced by a new storage, and an additional storage was constructed in the south-eastern corner. A hearth was constructed beside it.
Finds	Fragments of seven cups, two jugs, 2-3 storage vessels and two other vessels. Three bone awl, and a stone axe.
Activities	Presumably all household activities.
Date	MH I, Argissa MBA phase 5
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel C

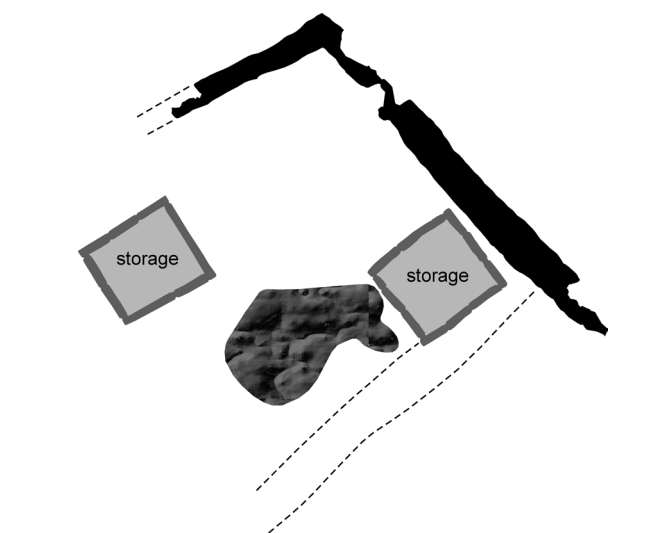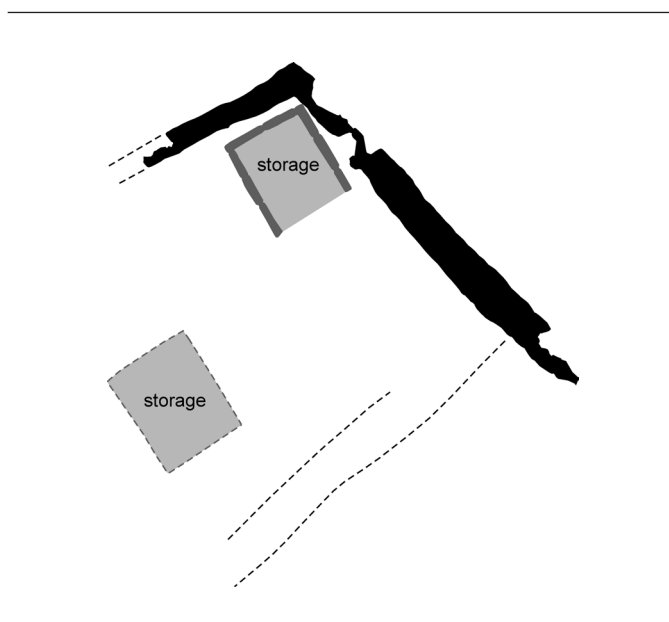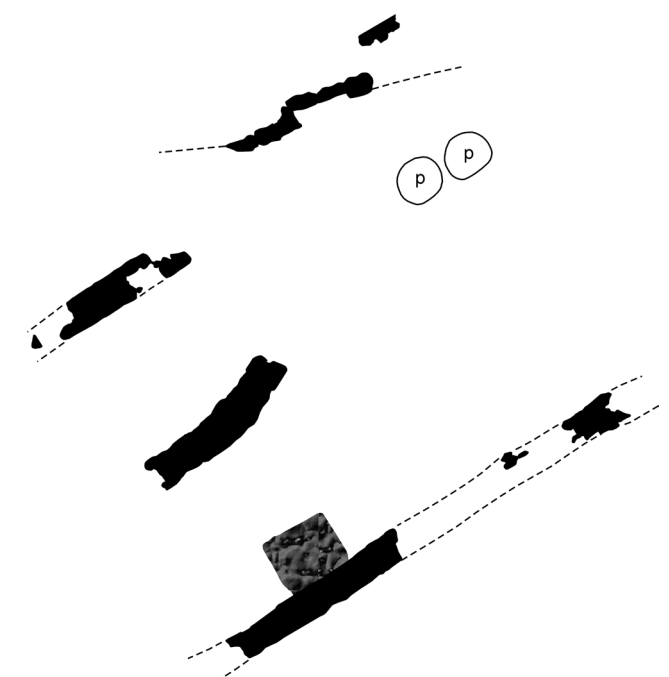

A16 Argissa house 16A




Preservation	Poorly preserved, only the ne wall remains, while the south-western wall was robbed out.
Desertion	Reconstructed into house 16B during the next phase.
Orientation	NE–SW, entrance in the northern wall.
Lay-out	Perhaps rectangular? The south-western wall might have been positioned in quadrant A12, or in quadrant A-C 13, partly overbuilding house 15.
Size	At least 20 m ² uncovered (6.50 x 3.00 m)
Walls	Two rows of stones. The part west of the entrance is made of medium sized stones, while the part east of the entrance was made of small stones. Ca. 0.50 m wide
Modifications	Rebuilt as house 16B, see A18
Floor	Clay floor. Small plaster of stones outside the north-western wall indicated the entrance area.
Furnishings	Hearth. Remains of a child burial were found under a pithos, placed along the northern wall.
Finds	Fragments of an amphora, a jug and a storage vessel. Two stone axes and a terracotta pierced disc.
Activities	Presumably all household activities.
Date	MH I, Argissa MBA phase 5
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel C

A17 Argissa house 16B

Preservation	Not well preserved.
Desertion	Deserted? Overbuilt by house 25B during the next phase.
Orientation	NE–SW, entrance in the NW
Lay-out	Perhaps rectangular? One room. The northern wall was placed on the wall of 16A, while the southern wall was moved 1 meter towards the south, extending the width of the house.
Size	At least 21 m ² uncovered (5.40 x 3.80 m).
Walls	Irregular laid and made of small and large stones. Ca. 0.40-0.50 m wide.
Modifications	-
Floor	Stamped clay.
Furnishings	Three storage structures, a large rectangular hearth and three postholes. A dark round patch on the floor could perhaps be a pit for vessel support. A small stone stair led towards the entrance of the house.
Finds	Fragments of a large amphora, two bowls, two cups and a jug. Terracotta bobbin and spindle whorl.
Activities	Presumably all household activities.
Date	MH II, Argissa MBA phase 6
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel B

A18 Argissa house 19



Preservation	Small part was well preserved, the remainder was eroded.
Desertion	Deserted? Overbuilt by houses 24 and 25A during the next phase.
Orientation	NE–SW
Lay-out	Perhaps rectangular? At least two rooms, as a tiny part of a clay partition wall was recovered.
Size	At least 7 m ² uncovered (1.40 x 5.10 m)
Walls	Walls were made of mud bricks and a few stones. Ca. 0.30-0.40 m wide.
Modifications	-
Floor	Not described.
Furnishings	A hearth with beside it a few large stones.
Finds	Fragments of two amphora's, four bowls, two possible cooking vessels, three cups, a jug, a pan, three scoops and a vessel. Terracotta wheel.
Activities	Presumably all household activities.
Date	MH II, Argissa MBA phase 6
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel B

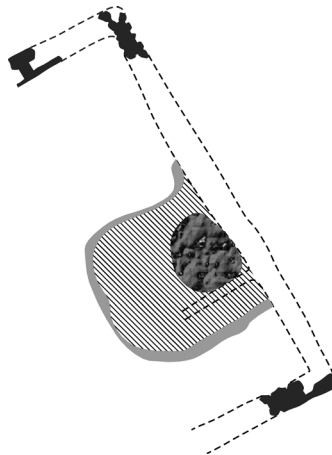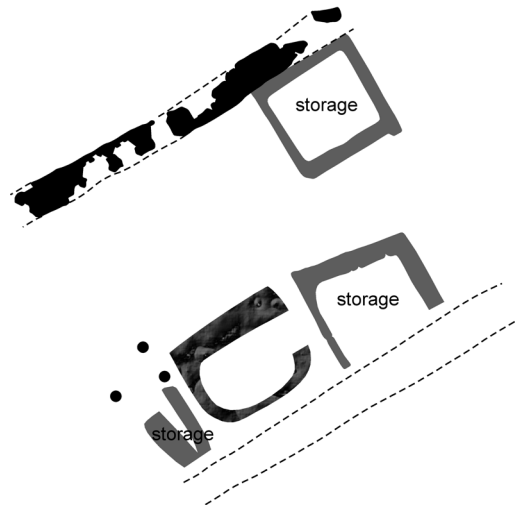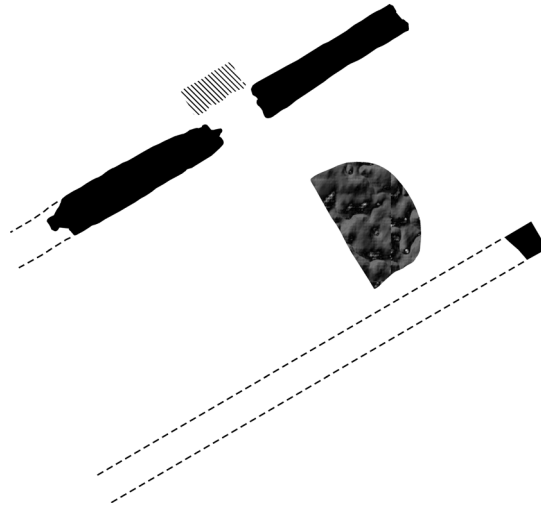

A19 Argissa structure 20	
Preservation	Poorly preserved, as only a dark colouring indicated the outline of the structure.
Desertion	Presumably deserted and subsequently overbuilt.
Orientation	NE–SW
Lay-out	Probably rectangular, with a slightly rounded ending in the south-west. One room.
Size	At least 7 m ² uncovered (2.60 x 2.50 m)
Walls	Not preserved. Perhaps made of organic material.
Modifications	-
Floor	Clayey earth
Furnishings	-
Finds	Possibly the fragments of a bowl and cup.
Activities	Perhaps auxiliary structure?
Date	MH II, Argissa MBA phase 6
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel B

A20 Argissa house 21	
Preservation	Poorly preserved, almost all the stones of the walls were robbed out.
Desertion	Presumably deserted, and overbuilt by house 26 during the next phase (?).
Orientation	NE–SW
Lay-out	Perhaps rectangular, at least one room, though according to the excavators this is the whole extent of the house.
Size	At least 16 m ² uncovered (4.20 x 3.80 m).
Walls	Unclear as most stones were robbed out. Probably ca. 0.50 m wide.
Modifications	-
Floor	Part of the floor around the hearth was plastered with stones.
Furnishings	A hearth, and on one side of the hearth a small border of mud bricks was constructed. Some stone paving around the hearth.
Finds	Fragments of two bowls, three cups, a jug, a storage vessels, and two other vessels. Terracotta anchor(?), three bobbins and a weaving weight, and a stone pounder.
Activities	Presumably all household activities.
Date	MH II, Argissa MBA phase 6
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel B




A21 Argissa house 22	
Preservation	Seemingly well preserved, but not entirely uncovered.
Desertion	Presumably deserted
Orientation	NW–SE
Lay-out	Irregular to rectangular
Size	At least 3 m ² uncovered (1.50 x 1.80 m)
Walls	Foundation made of two rows of small stones placed apart, walls made of mud brick. The partition wall was entirely made of mud bricks. Ca. 0.40-0.50 m wide.
Modifications	The floor was re-plastered once or twice.
Floor	Floor of stamped clay, two or three clay floors were identified in the profile.
Furnishings	A hearth was located in the eastern room.
Finds	Fragments of seven bowls, a cup and two storage vessels.
Activities	Presumably all household activities.
Date	MH II, Argissa MBA phase 6
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel B

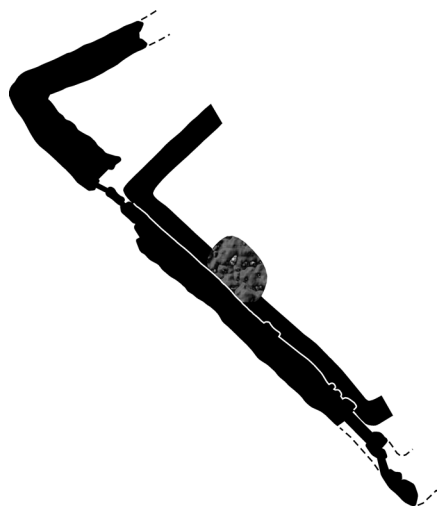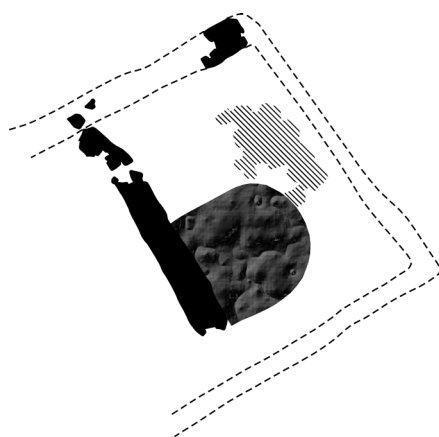

A22 Argissa house 23	
Preservation	Seemingly well preserved, but not entirely uncovered.
Desertion	Presumably deserted
Orientation	NW–SE
Lay-out	Irregular to rectangular
Size	At least 5 m ² uncovered (6.50 x 0.80 m).
Walls	Two rows of small to medium sized stones, placed in two rows. Ca. 0.30–0.40 m wide.
Modifications	-
Floor	-
Furnishings	No internal furnishings were preserved. However, the western side wall extended to the north and connected to a stone grid, probably an outdoor storage.
Finds	A terracotta weaving weight.
Activities	Presumably all household activities.
Date	MH II, Argissa MBA phase 6
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel B

A23a Argissa house 24A	
Preservation	See A24b.
Desertion	Restructured, see A24b
Orientation	E–W
Lay-out	Rectangular, and at least two rooms
Size	At least 5 m ² uncovered Room 1 1.40 x 2.90 m Room 2 1.90 x 0.90 m
Walls	Walls, including the partition wall, were made of mud bricks, ca. 0.20 m wide.
Modifications	See A24b
Floor	Stamped clay.
Furnishings	Nothing was preserved of the internal structures of the house. The house was partly built on top of an older storage feature.
Finds	Finds probably belong to the last use phase, see A24b.
Activities	Presumably all household activities.
Date	MH II, Argissa MBA phase 6
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel B

A23b Argissa house 24B	
Preservation	Moderately preserved, due to the use of mud bricks.
Desertion	Presumably deserted. The area was eventually turned into a cemetery.
Orientation	E–W
Lay-out	Rectangular, one room (the partition wall seen in house 24A was taken down).
Size	At least 6 m ² uncovered (2.00 x 2.90 m).
Walls	Mud brick walls, ca. 0.20 m wide.
Modifications	Compared to the previous phase, the partition wall is now removed, and a storage is constructed inside the house.
Floor	A new floor was laid in this house, made of a thick layer of clay.
Furnishings	Storage structure
Finds	Fragments of a jug and a stone polisher.
Activities	Presumably all household activities.
Date	MH II, Argissa MBA phase 7
References	Hanschmann and Bayerlein 1981
Illustration	After Hanschmann and Bayerlein 1981, Tafel A


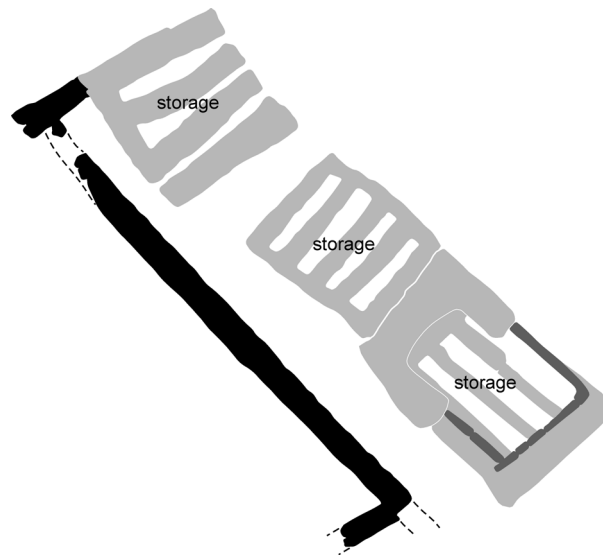


A24 Chasambali house A

Preservation	Moderately preserved, the south-western part was not preserved.
Desertion	Destroyed by fire
Orientation	NE–SW, with the apse in the north-east.
Lay-out	Apsidal, at least two rooms
Size	Ca. 44 m ² Room 1: 2.60 x 4.25 m Room 2: 7.75 x 4.35 m
Walls	Unclear, but presumably like house B made of stones placed on mud or clay. Ca. 0.40 m wide.
Modifications	Unclear
Floor	Traces of a clay floor were uncovered near the western wall.
Furnishings	A wooden posthole of 0.10 m in diameter and 0.14 m deep was uncovered near the western wall.
Finds	Bone tools, stone axe, fragments of vessels, and an almost complete pithos were found at a level of 60 cm.
Activities	Presumably all household activities.
Date	EH III–MH I? (ca. 2000 BC)
References	Theocharis 1962
Illustration	After Theocharis 1962: 43



A25 Chasambali house B

Preservation	Moderately preserved, the south-western part was not preserved.
Desertion	Destroyed by fire.
Orientation	NE–SW, with the apse in the north-east.
Lay-out	Apsidal, at least two rooms
Size	Ca. 45 m ² Room 1: 2.50 x 4.15 m Room 2: 8.25 x 4.15 m
Walls	0.30–0.40 m wide walls. Foundations made of stone, with mud brick walls on top, preserved up to four or five courses high (0.50 m). Ca. 0.40 m wide.
Modifications	Unclear
Floor	Unclear
Furnishings	Unclear. The inside of the house was not entirely excavated.
Finds	Cup with high-swung handle.
Activities	Presumably all household activities.
Date	EH III–MH I? (ca. 2000 BC)
References	Theocharis 1962
Illustration	After Theocharis 1962: 43

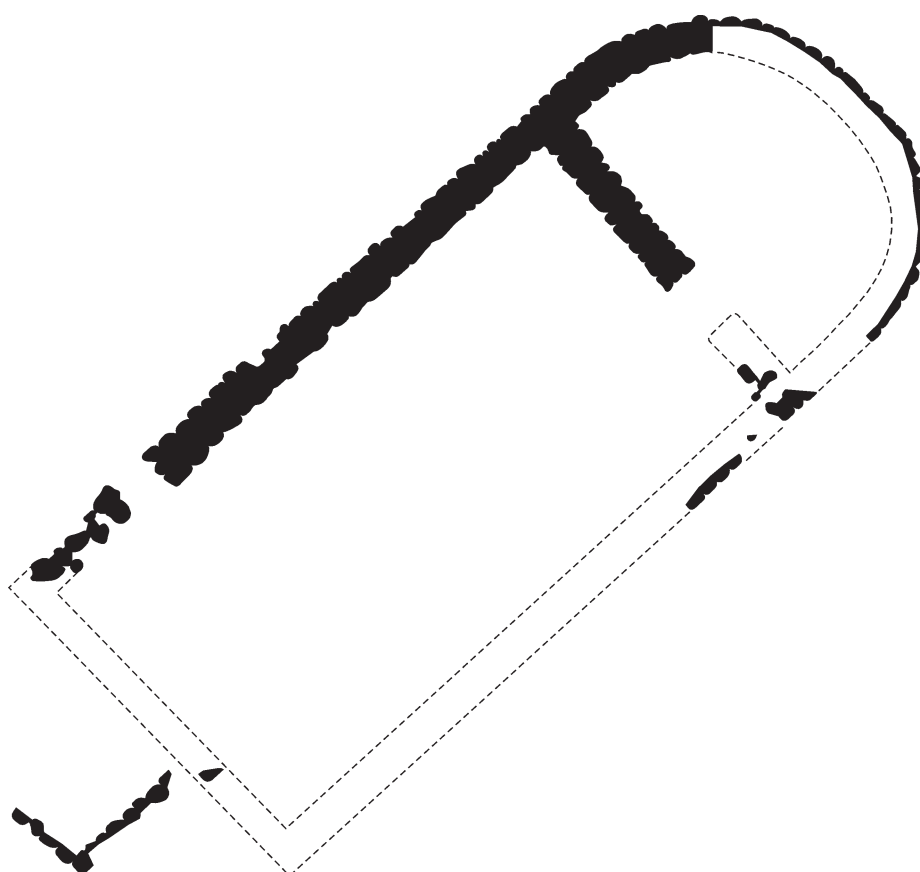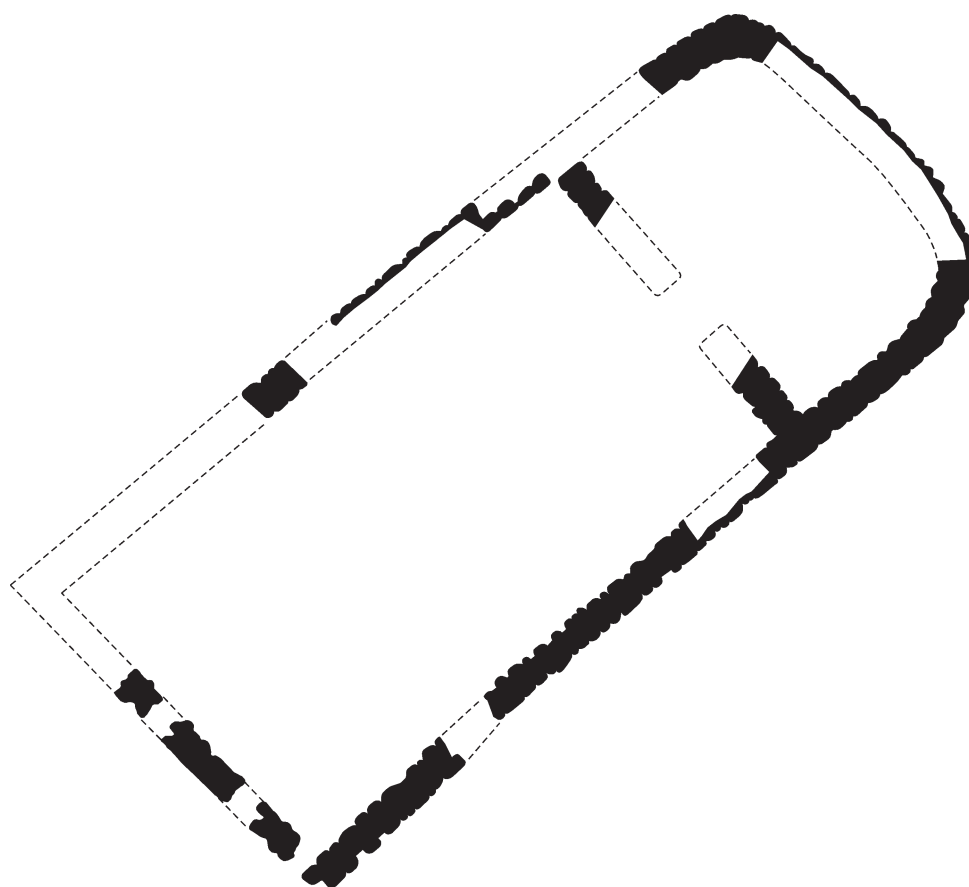


A26 Dimini house 1	
Preservation	Poorly preserved. The house was overbuilt during LH IIB, and parts of the walls were missing. The eastern part of the house was not completely excavated.
Desertion	Destroyed by fire.
Orientation	E–W, entrance in the east.
Lay-out	Unclear layout, at least two rooms.
Size	Ca. 17 m ² uncovered, but house must have been at least 40 m ² . Room 1: 4.35 x 4.00 m Room 2: unclear length, but 4.00 m wide
Walls	Solid foundations of stones, 0.45–0.55 m wide, preserved until 0.50 m. The superstructure was made of brick. Wooden beams were recovered, and two postholes were located in the western corner.
Modifications	-
Floor	Floor was made of stamped clay/earth.
Furnishings	Hearth in the central(?) room along the eastern wall. A MH III burial was located north of the house, but it was unclear if this grave was earlier than the houses or of the same date.
Finds	Five pithoi in the front room. Ceramics recovered consisted of handmade coarse ware, cooking vessels, bowls, cups, jugs, Grey Minyan, handmade Red-Yellow polished ware, Matt Painted monochrome and polychrome ware.
Activities	Presumably all household activities.
Date	MH III
References	Adrymi-Sismani 2010
Illustration	After Adrymi-Sismani 2010, figure 3

A27 Ermitsi house A	
Preservation	Moderately preserved, part of the apse was not preserved. The excavation did not continue south, as such the south-south-eastern end of the house was not uncovered.
Desertion	Presumably deserted?
Orientation	NE–SW, with the apse in the north-west and the entrance probably in the south-west. Another possible entrance might have been in the north-west.
Lay-out	Apsidal, one room. An entrance was located in the south. An additional entrance seems to have been in the north-west of the apse, 1.80 m wide.
Size	Ca. 35 m ² (8.60 x 4.10 m).
Walls	The foundations were made of limestone set in mud, preserved until a height of 0.34 m. Width of the walls varied from 0.40–0.60 m. The eastern wall and the apse were carefully made of small and medium sized stones, placed in two or three rows, and set in mud. The western wall was less carefully made of small and large stones.
Modifications	-
Floor	Stamped earth
Furnishings	Circular stone construction in the apse. In the plan a roughly rectangular structure is seen along the western wall, but this structure was not described.
Finds	Domestic coarse ware, storage vessels and fine grey ware. In the apse: millstone grinders, stone grinders, tools and pierced clay discs.
Activities	Presumably all household activities.
Date	Late MBA / MH III (?)
References	Chatziangelakis 2010
Illustration	After Chatziangelakis 2010, figure 12

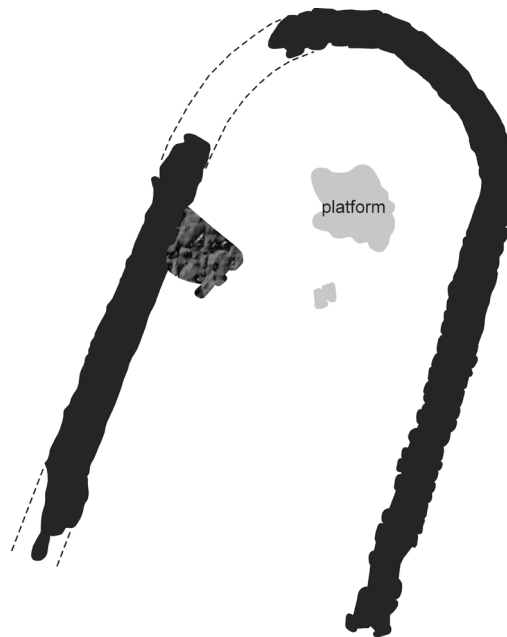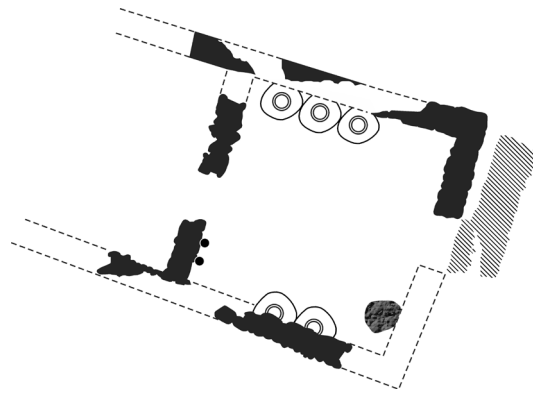

A28 Ermitsi house B	
Preservation	Poorly preserved, as the front and the rear were not preserved.
Desertion	Presumably deserted?
Orientation	N–S, with the supposed apse in the north.
Lay-out	Probably apsidal, one room. An entrance was located in the south.
Size	The excavated part measured ca. 36 m ² (8.00 x 4.50 m)
Walls	The walls were strong and well-made of large and medium sized limestone, placed in two or three rows, set in mud. The walls were preserved for one or two courses, to a height of 0.20 m. Walls were ca. 0.50-0.56 m thick. Traces of plaster were preserved.
Modifications	-
Floor	Stamped earth
Furnishings	Stone platform / row of stones in the centre of the room, perhaps for support of a post. Spreads of clay were also uncovered throughout the whole structure.
Finds	Domestic coarse ware, storage vessels and fine grey ware. Millstones, stone tools, grinders, broken flint blades, polished bone tools, spools, strainer, and pierced clay discs.
Activities	Presumably all household activities.
Date	Late MBA / MH III (?)
References	Chatziangelakis 2010
Illustration	After Chatziangelakis 2010, figure 12


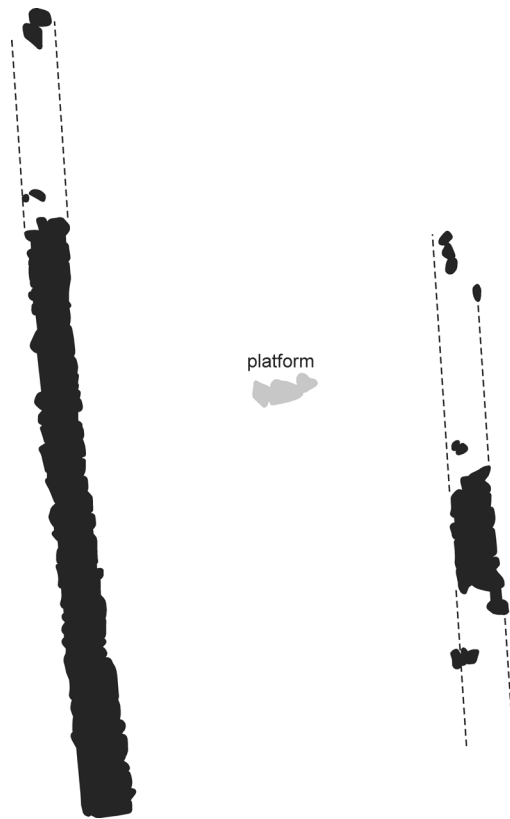


A29 Ermitsi house C	
Preservation	Moderately preserved. A part of the apse is missing, and also the rear wall is not entirely preserved.
Desertion	Presumably deserted?
Orientation	N–S with the apse in the north and entrance presumably in the south.
Lay-out	Apsidal, one room
Size	Ca. 105 m ² (16.60 x 6.30 m)
Walls	The walls are strong and well-built, made of large rough stones, mainly limes tones and a few quartz stones. The stones were placed in two rows and filled in with mud. Preserved until a height of 0.40 m and ca. 0.50 m wide.
Modifications	-
Floor	Stamped earth
Furnishings	Perhaps hearths, represented by irregular shaped clay paving, with traces of burning.
Finds	Domestic coarse ware, storage vessels and fine grey “Minyan” ware. Millstones, grinder, tools, terracotta pierced discs, spools, spindle whorls, all mainly located in the apse.
Activities	Presumably all household activities.
Date	Late MBA / MH III (?)
References	Chatziangelakis 2010
Illustration	After Chatziangelakis 2010, figure 12



A30 Ermitsi structure D	
Preservation	Moderately preserved. But only a small part is excavated.
Desertion	Presumably deserted?
Orientation	N–S, with the apse in the north and entrance presumably in the south.
Lay-out	Apsidal
Size	At least 10 m ² was uncovered.
Walls	0.55 m wide. Two-three rows of stones. In the southern part, small stones were placed in two or three parallel rows, and in the northern part larger stones were used in only one or two rows.
Modifications	-
Floor	-
Furnishings	-
Finds	Several half-preserved pithoi were located in the east. Other finds consisted of stone tools.
Activities	Perhaps a storage?
Date	Late MBA / MH III (?)
References	Chatziangelakis 2010
Illustration	After Chatziangelakis 2010, figure 12

A31 Kastraki house 3	
Preservation	Seemingly well preserved
Desertion	Destroyed by fire
Orientation	Unclear
Lay-out	Unclear, as only a single rectangular room was uncovered.
Size	The rectangular room measured 4.00 x 4.70 m (18.80 m ²).
Walls	Preserved till 0.70 m high.
Modifications	-
Floor	Made of beaten earth, and burnt red by fire.
Furnishings	-
Finds	On the floor remains of charcoal, ashes, clay parts of the roof and mud brick were recovered. Many stone tools were recovered such as stone celts, axes, grinders, a stone mould, a millstone, and flakes of flint. In situ pithoi and ceramics were also uncovered.
Activities	-
Date	MH II
References	Batziou-Efstathiou 2010
Illustration	After Batziou-Efstathiou 2010, figure 2

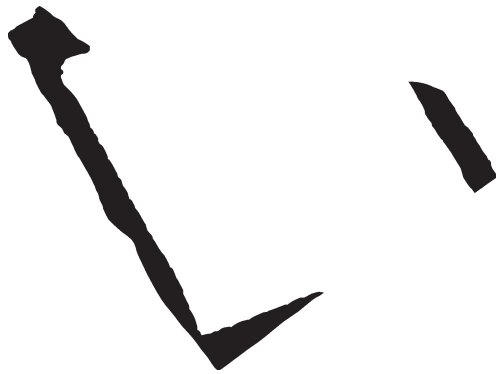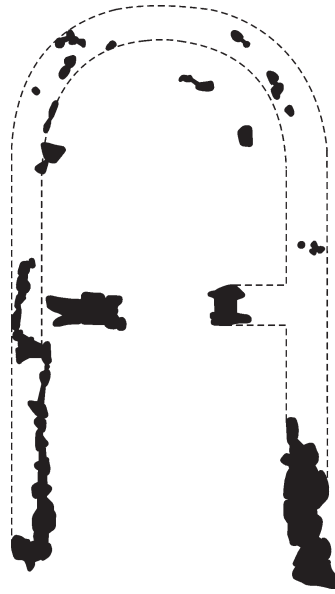

A32 Magula Dimitra Agia house A

Preservation	From the photo published the houses seem moderately preserved. The west wall was partly destroyed.
Desertion	-
Orientation	N–S, with the apse facing north.
Lay-out	Apsidal, two rooms. The entrance into the apse was ca. 0.60 m wide.
Size	Ca. 52 m ² Main room 1 9.60 x 4.25 m Apse room 2 2.60 x 4.30 m
Walls	Foundations built of stone with mud as binding material. Ca. 0.35-0.70 m wide and preserved till a height of 0.40 m. The partition wall was ca. 0.20 m wide.
Modifications	-
Floor	Earth floor.
Furnishings	A door socket was located on the inside of the apse, beside the entrance. A circular area was paved with stones plates in south-eastern corner of the apse. Perhaps the base of an upper structure. A large hearth (1.30 m diameter) was located in the centre of the main room.
Finds	-
Activities	Presumably all household activities.
Date	MBA
References	Toufexis 1997
Illustration	Toufexis 1997, figure 192c

A33 Magula Dimitra Agia house B

Preservation	Poorly preserved. Parts of the west wall, the central part of the apse, and the eastern arm of the partition wall were destroyed. Later, a well was dug into the main room.
Desertion	-
Orientation	N–S, with the apse facing north
Lay-out	Apsidal, two rooms
Size	Ca. 48 m ² Main room 1 9.70 x 3.65-4.50 m Apse room 2 2.20 x 3.60 m
Walls	Foundations built of stone with mud as binding material. Ca. 0.35-0.70 m wide and preserved till a height of 0.40 m.
Modifications	-
Floor	Earth floor.
Furnishings	Inside the apse, along the eastern wall, was a fragmented paved area (1.05 x 0.70 m), perhaps the base of an upper structure. A structure with a clay rim was partly uncovered in the north-western corner of the main room, but not further excavated. Areas of burning were found inside the main room.
Finds	-
Activities	Presumably all household activities.
Date	MBA
References	Toufexis 1997
Illustration	Toufexis 1997, figure 192c



A34 Magula Dimitra Agia house C

Preservation	The apse was destroyed.
Desertion	-
Orientation	N–S, with the apse facing north, and entrance located in the south.
Lay-out	Apsidal, two rooms. The entrance into the main room was 0.70 m, the entrance into the apse was 0.60 m wide.
Size	Ca. 40 m ² Room 1 7.10-7.90 x 4.10-4.60 m Room 2 1.40 x 4.60 m
Walls	Foundations built of stone with mud as binding material. Ca. 0.35-0.70 m wide and preserved till a height of 0.40 m.
Modifications	-
Floor	Earth floor.
Furnishings	A structure with a clay rim was partly uncovered in the north-western corner of the main room, but not further excavated. The structure was partly surrounded by vertically placed stones.
Finds	-
Activities	Presumably all household activities.
Date	MBA
References	Toufexis 1997
Illustration	Toufexis 1997, figure 192c



A35 Pevkakia house 2 early	
Preservation	Poorly preserved, as stone walls were robbed out.
Desertion	Rebuilt as house 2.
Orientation	N–S
Lay-out	Rectangular? At least one rooms
Size	At least 13 m ² uncovered. Ca. 2.40 m wide and at least 5.6 m long.
Walls	Seemingly narrow and feeble walls.
Floor	Unclear
Features	Four pits and six postholes
Modifications	Rebuilt as house 2
Finds	-
Activities	Unclear
Date	MBA phase 2, EH III
References	Maran 1992aa
Illustration	After Maran 1992aa, Plan XIII A




A36 Pevkakia house 2	
Preservation	Reasonably preserved, but parts of walls were missing, and only a small part of the house was uncovered during excavations.
Desertion	Rebuilt as house 1 during the same phase.
Orientation	N–S
Lay-out	Rectangular? At least two rooms
Size	At least 15 m ² uncovered. Ca. 2.80 m wide. Southern room at least 3.60 m long, the northern 1.60 m.
Walls	The western wall was built against the hillside. Of the partition wall only a clay base and one layer of stones was preserved, but no entrance was located in it. Ca. 0.70 m wide.
Modifications	-
Floor	Black-ashy clay floor in the southern room. In the northern room a layer of yellow clay with traces of white ash was found, but not considered a real floor.
Furnishings	Southern room: in the north-eastern corner was a rounded base of hard grey-yellow clay. In the centre of the rooms was a circle of orange clay with a hole/deepening in the middle. Around the circle were imprints of twines visible. East of this feature was a pit, with remains of a vessel standing in it. Towards the south was a similar though smaller pit. Towards the north was a hard clay circle, with a posthole in the middle. The borders of the hole showed burning traces. In the circle was a fragment of antler horn. Northern room: a similar clay circle, with burnt posthole was located here. The two clay circles with postholes were difficult to identify in the published plans.
Finds	Floor: fragments of two bowls, four jugs, a lid and seven vessels House: fragments of 10 bowls, two cups, two jugs, a kantharos, and a vessel. Obsidian blade, horn hammer, bone needle, eight terracotta spindle whorls, three bone tools and a flint tool.
Activities	The house was perhaps used for storage and as a working area.
Date	MBA phase 2, EH III
References	Maran 1992a
Illustration	After Maran 1992a, Plan XIII B

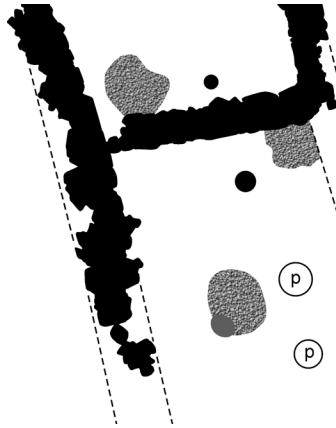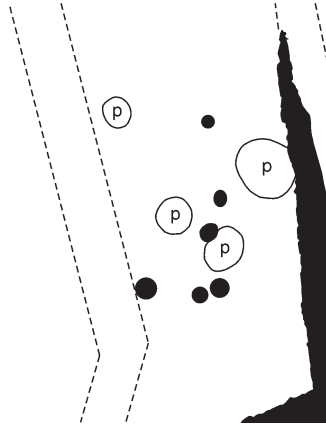

A37 Pevkakia house 1	
Preservation	Poorly preserved. Parts of walls are missing, and only a small part of the house is uncovered during excavations.
Desertion	Deserted? The area is later levelled with a layer of 0.20-0.60 m thick and covered with a 1.00 m thick layer of MBA phase 5–6 debris.
Orientation	N–S
Lay-out	Rectangular? At least two rooms.
Size	Unclear, but the northern room measures at least 3.60 x 3.20 m and the southern room 3.60 x 2.00 m.
Walls	The walls of house 1 are not placed neatly upon the walls of predecessor house 2. The western wall has a fundament of block like stones and is moved 0.40 m towards the west compared to the west wall of house 2, while the eastern wall is moved 0.50 m towards the east. Walls were ca. 0.50-0.80 m wide.
Floor	A light-yellow hard clay floor in the northern room. No floor is identified in the southern room.
Features	A rectangular pit filled with clay in the northern room and three postholes. A pithos pit and two or three postholes in the southern room. The postholes were placed more or less on the axis of the house, and might have been used for the support of the roof.
Modifications	-
Finds	-
Activities	Northern room perhaps the living area, and the southern room storage and working area.
Date	MBA phase 2, EH III
References	Maran 1992a
Illustration	After Maran 1992a, Plan XIII C



A38 Pevkakia house 3	
Preservation	Not well preserved, due to levelling operations
Desertion	Unclear, presumably deserted
Orientation	N–S
Lay-out	Rectangular? At least two rooms.
Size	At least 16 m ² uncovered. Northern room: 1.2+ x 2.8+ m Southern room: 4.2+ x 3.0 m
Walls	Made of two rows of stone.
Modifications	The eastern wall 7 shows two construction phases.
Floor	Not identified, due to levelling operations.
Furnishings	Not identified, due to levelling operations.
Finds	Not identified, due to levelling operations.
Activities	Unclear
Date	Sherds from the walls indicate an MBA phase 2 date.
References	Maran 1992a
Illustration	After Maran 1992a, Plan XIII C

A39 Pevkakia house 318A	
Preservation	Moderately preserved, and partly uncovered.
Desertion	Rebuilt as house 318B, see A41
Orientation	E–W
Lay-out	Probably rectangular? At least two rooms. Perhaps wall-remains towards the west (Befund A) were part of the structure.
Size	Unclear, but at least 7.80 m ² was uncovered.
Walls	Large and small stones were placed in roughly two rows. The partition walls were made of small stones only. Ca. 0.55-0.70 m wide.
Modifications	Rebuilt as house 318B, see A41.
Floor	A floor was recovered in the eastern room, but not described. In the western room no floor was identified, only loose brown layers of soil.
Furnishings	The north-eastern corner was partitioned off with stones. Inside was a shallow pit filled with ash remains and charcoal, probably a hearth. A pithos pit (possibly plastered) was located in the south of the room.
Finds	Floor: fragment of a storage vessel in the eastern room.
Activities	The uncovered area seems to have functioned as a cooking and storage area.
Date	EH III, MBA phase 3
References	Maran 1992a
Illustration	After Maran 1992a, Plan VIA

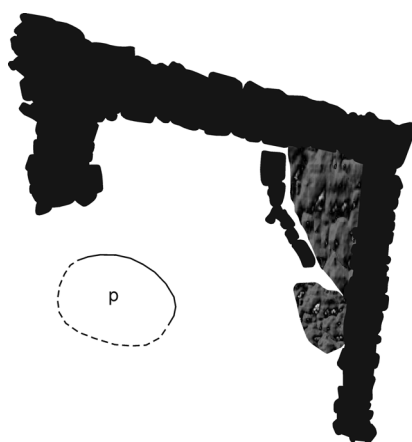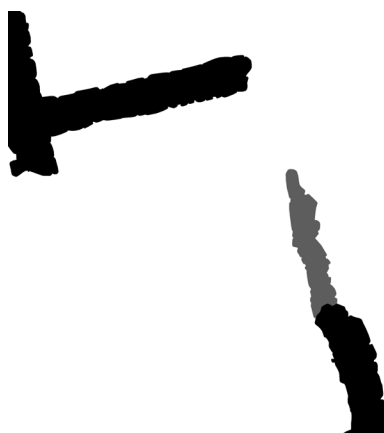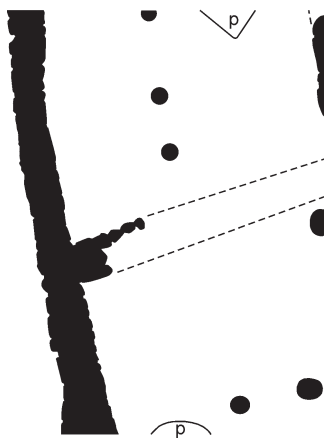



A40a Pevkakia house 317a	
Preservation	See A40b. The furnishings of the first use phase were better preserved than those of the second use phase.
Desertion	Refurbished, see A40b
Orientation	E–W. Unclear where the entrance was located; perhaps in the southern wall.
Lay-out	Rectangular, two rooms
Size	Ca. 33 m ² Western room 3.10 x 3.80 m Eastern room 5.60 x 3.80 m
Walls	Small and large stones used, roughly laid in two rows. The walls were not very straight, but rather wobbly. Ca. 0.55-0.65 m wide.
Modifications	Refurbishing took place, see A40b.
Floor	Grey clay floor in western room. Clay floor in main room.
Furnishings	Western room: hearth along the west wall. Possible storage area was represented by remains of a patch of yellow clay and standing mud brick tiles around it in the south-western corner. Eastern room: central hearth, two clay / mud brick platforms along the northern wall, clay plastering along the wall and north-western corner, which seemed to have formed a bench or shelf. A posthole was located along the western wall, and a pit for a pithos was located in the south-eastern corner.
Finds	Western room: a pithos sherd was found in the hearth along the west wall. Eastern room: the central hearth contained sherd material. A copper or bronze fragment was found near the hearth. A terracotta weaving weights was found next to the clay bench / shelf. A spindle whorl was found further south in the room.
Activities	Presumably all household activities.
Date	EH III, MBA phase 3
References	Maran 1992a
Illustration	After Maran 1992a, Plan VIA

A40b Pevkakia house 317b	
Preservation	Moderately preserved. Stones from the walls were pulled out. The furnishings of the second use phase were not well preserved, due to overbuilding by house 314.
Desertion	Rebuilt and expanded as house 314, see A44.
Orientation	E–W. Unclear where the entrance was located.
Lay-out	Rectangular, two rooms
Size	Ca. 33 m ² Western room 3.10 x 3.80 m Eastern room 5.60 x 3.80 m
Walls	Small and large stones were used, roughly laid in two rows. The walls were not very straight, but rather wobbly. Ca. 0.55-0.65 m wide.
Modifications	-
Floor	The floor in the central room was made of grey clay. Back room had no floor.
Furnishings	Western room: a two layered hearth in the south-western corner.
Finds	No finds were specifically ascribed to this floor.
Activities	Presumably all household activities.
Date	EH III, MBA phase 3
References	Maran 1992a
Illustration	After Maran 1992a, Plan VIA

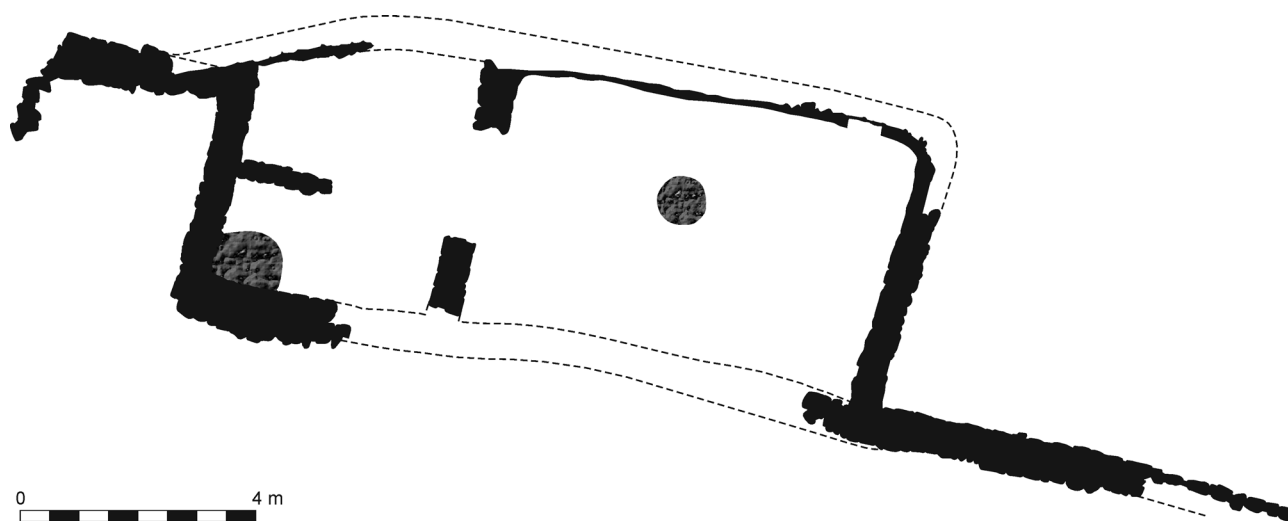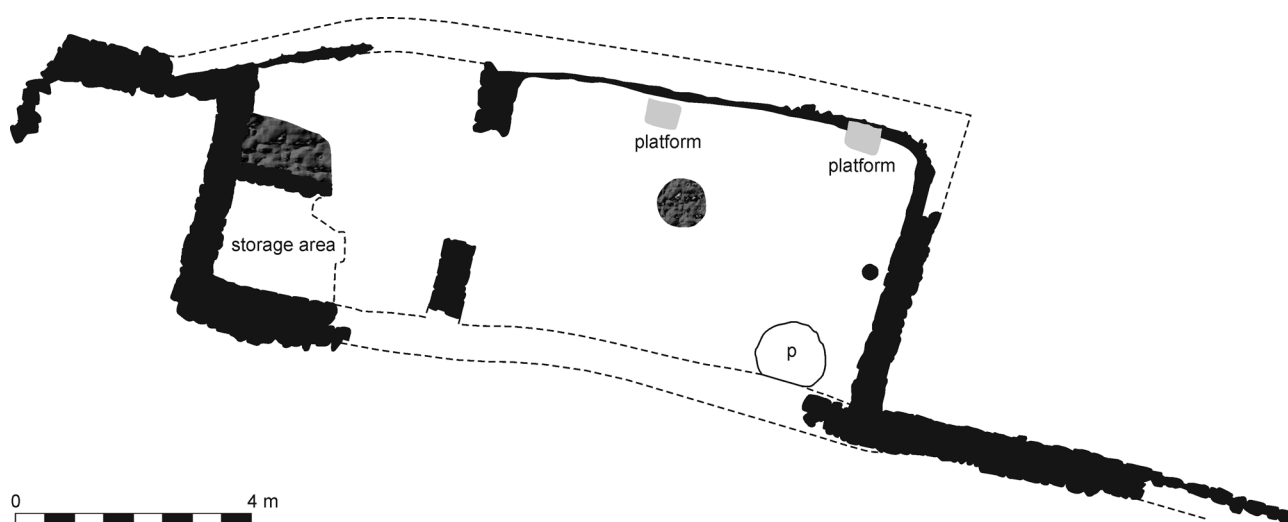



A41 Pevkakia house 318B	
Preservation	Well preserved, but only the northern half was uncovered.
Desertion	At some point connected to house 316A, forming house 316A/318B, see A43.
Orientation	E–W, entrance presumably in the south or east.
Lay-out	Rectangular, at least two rooms
Size	Ca. 9 m ² uncovered. Eastern room: 1.75 x 2.30 m Next room: 2.00 x 2.25 m
Walls	The northern wall was built of large flat stones.
Modifications	The continuation of the northern wall towards the west consisted in the middle of flat-quarried stones, indicating a different building phase. This new wall connected building 318B with 316A.
Floor	A clay floor was ascribed to both rooms, but it was unclear if it belonged to the house before or after it was combined with house 316A.
Furnishings	-
Finds	-
Activities	-
Date	MH I, MBA phase 4
References	Maran 1992a
Illustration	After Maran 1992a, Plan VIB

A42 Pevkakia house 316A	
Preservation	Well preserved, but only the northern half was uncovered.
Desertion	Eventually connected to house 318B, forming house 316A/318B, see A43.
Orientation	E–W entrance presumably in the south or east.
Lay-out	Rectangular, at least one room
Size	At least 15 m ² uncovered. Western room: 4.95 x 3.05 m
Walls	The western wall was shared with house 311B, and built of large stones with clay in between. The walls attached to this wall were made of small stones.
Modifications	The continuation of the northern wall consisted in the middle of flat quarried stones, indicating a different building phase. This new wall connected building 316A with 318B.
Floor	Light brown clay floor in the western room, mixed with pieces of light yellow clay lumps and ash. However, it was unclear if it belonged to the house before or after it was combined with house 318B.
Furnishings	-
Finds	-
Activities	-
Date	MH I, MBA phase 4
References	Maran 1992a
Illustration	After Maran 1992a, Plan VIB

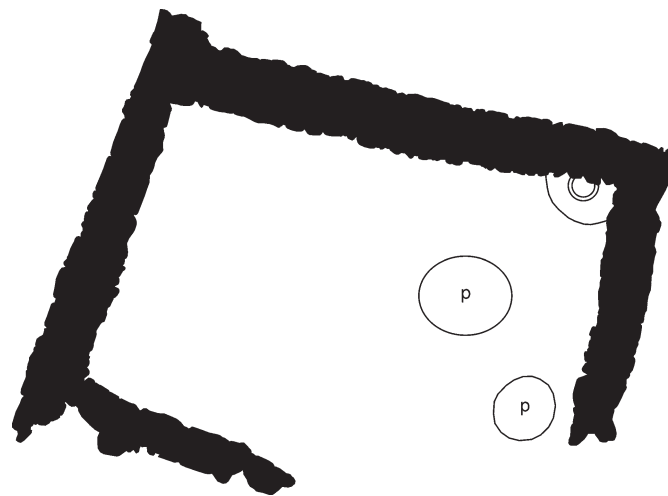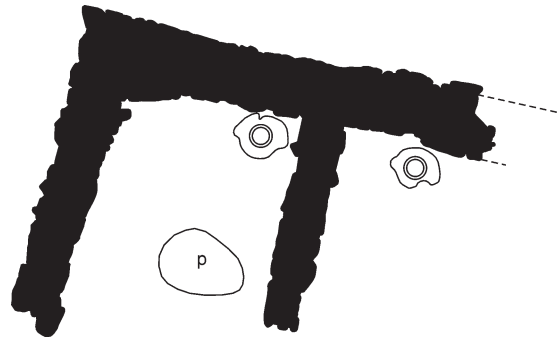



A43 Pevkakia house 316A/318B	
Preservation	Well preserved, but only the northern half was uncovered.
Desertion	Eventually rebuilt as house 316B, see A46.
Orientation	E–W, entrance presumably in the south or east.
Lay-out	Rectangular, at least four rooms.
Size	Ca. 27 m ² uncovered Western room: 4.95 x 3.05 m Next room: 1.45 x 2.55 m Next room: 2.00 x 2.25 m Eastern room: 1.75 x 2.30 m
Walls	The western wall was shared with house 311B, and built of large stones with clay in between. The walls attached to this wall were made of small stones. The continuation of the northern wall consisted in the middle of flat quarried stones, and towards the east built of large flat stones. Walls were ca. 0.55-0.70 m.
Modifications	Rebuilt during the next phase.
Floor	Light brown clay floor in the western room, mixed with pieces of light yellow clay lumps and ash. Clay floors were also identified in the other three rooms. However, it is unclear if these belonged to the house before or after it was combined.
Furnishings	Western room: two pits for pithoi and a burial. Next room: - Next room: a pit, and a pithos pit Eastern room: a pithos pit
Finds	Western room: the burial, accompanied with a fish vertebrae and animal bones, was placed in a large vessel. Third room from the west: fragment of a pithos, remains of copper slags, and in the fill of the room a copper or bronze fragment. Eastern room: fragment of a pithos.
Activities	Western room living room.
Date	MH I, MBA phase 4
References	Maran 1992a
Illustration	After Maran 1992a, Plan VIB

A44a Pevkakia house 314a	
Preservation	Well preserved, small part of the northern wall was not excavated.
Desertion	See A44b
Orientation	E–W, entrance in the west
Lay-out	Rectangular, at least two rooms and a triangular entrance area.
Size	Ca. 52.5 m ² Storage 1.20 x 1.60 m Main room 7.60 x 4.40 m Back room 4.30 x 4.00 m
Walls	Some traces of wall plaster were preserved on the inside of the walls, related to the first floor of the house. Walls were ca. 0.40-0.55 m wide.
Modifications	It seems that the sidewalls were repaired at some point: the northern wall of the main room did not neatly bond with the northern wall of the back room, but was moved 0.10 towards the south. The floor and internal structures were also modified, see A44b. It is unclear if the wall repairs coincided with the refurbishing of the house, and if the back room was perhaps attached to the main room at some later point.
Floor	First clay floor was grey coloured.
Furnishings	Entrance area: storage structure. A posthole with stone wedging was located just outside the entrance. Main room: large central hearth, box made of four mud bricks, clay platform along the northern wall, and patch of yellow clay near the hearth. Dark patches of earth in the north-eastern and south-eastern corners, perhaps places where cooking took place. Backroom: several pits for pithoi
Finds	Back room: three small amphorae.
Activities	Presumably all household activities.
Date	MH I, MBA phase 4
References	Maran 1992a
Illustration	After Maran 1992a, Plan VIB

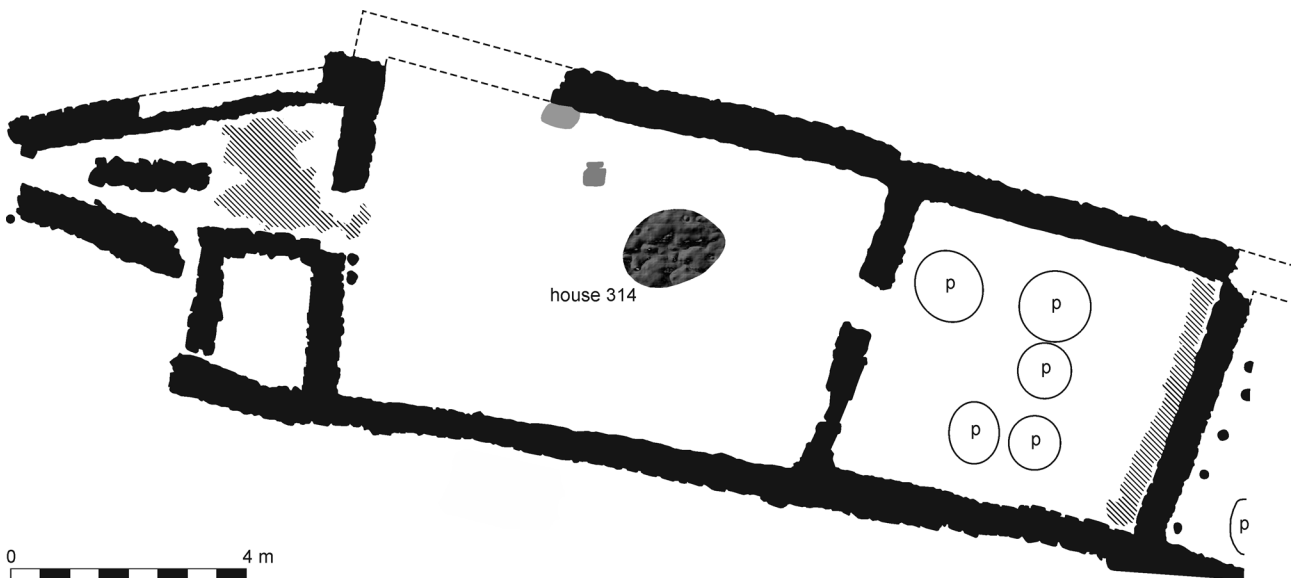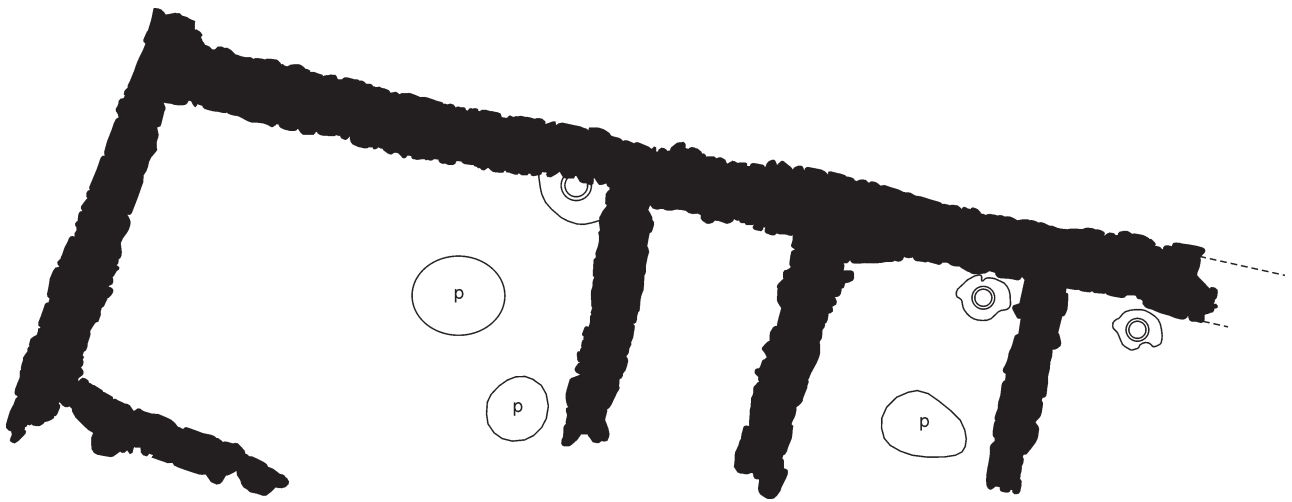



A44b Pevkakia house 314b	
Preservation	Well preserved, small part of the northern wall was not excavated.
Desertion	Rebuilt as house 310A1 during the next phase. However it seems that the house was abandoned for a short time, as in the fill layers of the house several child burials were dug. Also, in the walls of house 310A1 a child skeleton was found, suggesting that after abandonment of house 314 a child burial was deposited on the wall, while later on top of this wall house 310A1 was erected, thereby incorporating the skeleton.
Orientation	E–W, entrance in the west.
Lay-out	Rectangular, at least two rooms and a triangular entrance area.
Size	Ca. 52.5 m ² Storage 1.20 x 1.60 m Main room 7.60 x 4.40 m Back room 4.30 x 4.00 m
Walls	Traces of red wall plaster on the wall were related to the second floor of the house. Traces of greenish plaster were found on the walls of the back room. Walls were ca. 0.40–0.55 m wide.
Modifications	Compared to house 314a the following changes took place: the floor was renewed inside the storage and the house. In addition, changes were made to the furnishings.
Floor	The second floor was made of grey clay with traces of ash. The second floor in the back room was made of grey yellow clay with pieces of chalk.
Furnishings	A storage structure was located in the entrance area, while a posthole with stone wedging was located just outside the entrance. Main room: large central hearth, with a pit for a vessel next to it. Similar pits were located in the north-western corner and next to the eastern doorway. Part of the southern partition wall was taken down, and a platform of mud bricks was created (1.20 long). In the north-eastern corner a small rounded wall was built to partition off a hearth. Two short and narrow walls ran from the eastern doorway and wall into the main room. Perhaps these were used to support a storage standing in the pit. Back room: large pit filled with a substance of clay brick remains. Beside the eastern wall a row of flat stone was placed, perhaps to support the fundament. On the other side of the eastern wall five postholes were placed along the wall.
Finds	No finds were specifically ascribed to this floor.
Activities	Presumably all household activities.
Date	MH I, MBA phase 4
References	Maran 1992a
Illustration	After Maran 1992a, Plan VIB

A45 Pevkakia house 311A	
Preservation	Reasonably well preserved, the north-eastern corner of the wall was disturbed, while the western part was not uncovered.
Desertion	It seems the house was deserted and that during this period several child burials were dug here (under wall 341 of house 311B). Eventually the house was rebuilt during phase 5, as house 311B, see A47.
Orientation	NW–SE, the entrance was presumably in the unexcavated north-western part.
Lay-out	Triangular, one room.
Size	Ca. 26 m ² uncovered (5.60 x 4.55 m).
Walls	The southern wall was built of small angular stones. The northern wall was made of larger stones. The eastern wall was shared with house 316A/318B. The walls were ca. 0.55 m wide.
Modifications	The floor was renewed.
Floor	Yellow clay floor. The floor was renewed. However, this floor was disturbed by levelling activities preceding the construction of house 311B.
Furnishings	Two plastered pithoi pits were located along the northern wall, and two more in the NE corner. Two pits filled with sand were located in the west. A hearth was in the centre and a possible storage structure in the SE corner. In the west profile two upstanding mud bricks could indicate the existence of a structure here, perhaps a storage.
Finds	No finds were specifically ascribed to the house.
Activities	Presumably all household activities.
Date	MH I, MBA phase 4
References	Maran 1992a
Illustration	After Maran 1992a, Plan VIB

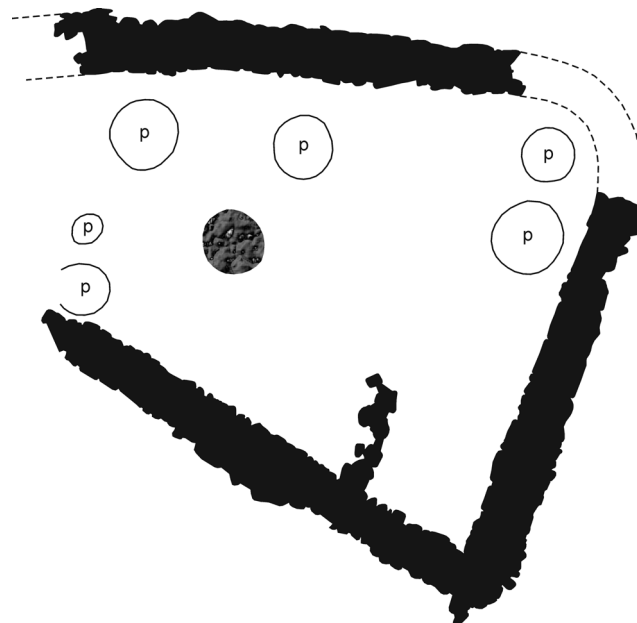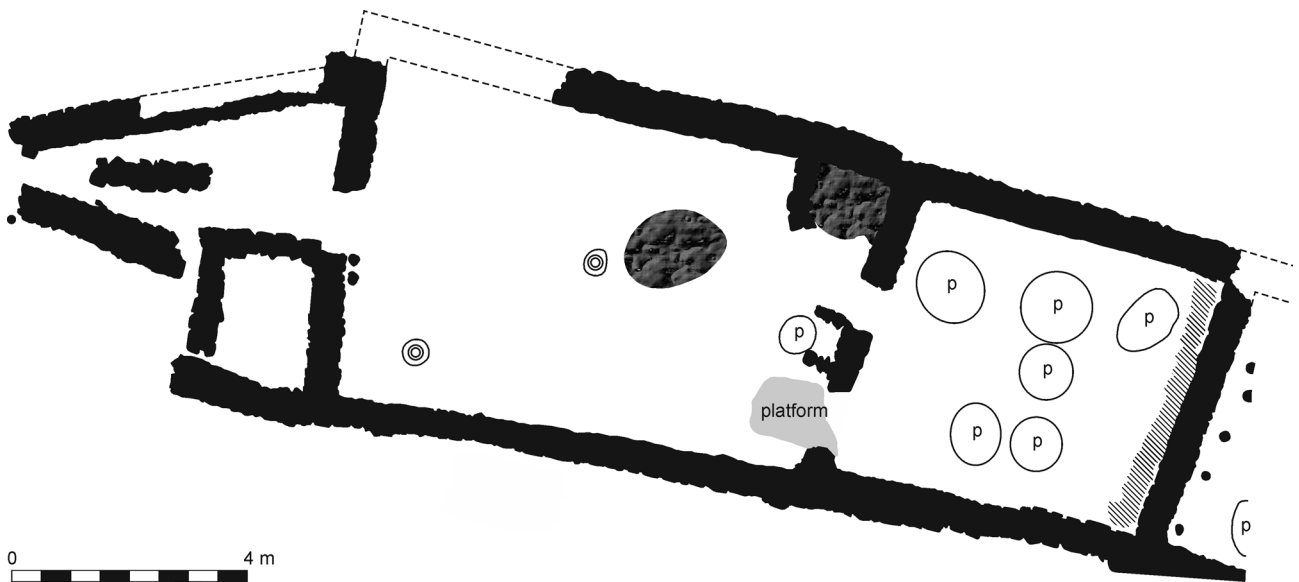


A46 Pevkakia house 316B	
Preservation	Well preserved, though the southern and eastern most part were unexcavated.
Desertion	Rebuilt as houses 313A and 315, though presumably deserted for a short period, as child burials were dug in the fill and the clay bench of the house.
Orientation	E–W, entrance presumably in the south or east.
Lay-out	Rectangular, at least four rooms.
Size	Ca. 30 m ² uncovered Western room: 4.90 x 3.35 m Next room: 1.60 x 2.40 m Next room: 1.85 x 2.80 m Eastern room: 1.60 x 2.80 m
Walls	The walls were well-made, especially the western wall that was made of herringbone masonry and preserved up to 1.25 m high. The walls were ca. 0.55–0.95 m wide.
Modifications	Two floors were identified in the easternmost room.
Floor	Clay floor in the western room, covered with mud bricks. Next room a floor and on top of it was a layer of mud bricks. The third room had a clay floor. The easternmost room had a clay floor, as well as a second floor, which was not described.
Furnishings	Western room: at least three pithos pits Second room from the west: rounded partition wall, and in the area it enclosed was a layer of yellow clay, a grey layer, and in the corner a posthole, strengthened with stones at the bottom. Eastern room first floor: a pithos pit and a clay bench (of unclear use). Eastern room second floor: a pithos pit with pithos along the northern wall
Finds	Western room: two crucibles, spindle whorls and a bone tool. Eastern room: A pithos belonging to the last phase.
Activities	Presumably all household activities.
Date	MH II, MBA phase 5
References	Maran 1992a
Illustration	After Maran 1992a, Plan VIIA

A47 Pevkakia house 311B	
Preservation	Well preserved, only the westernmost part was unexcavated.
Desertion	Collapsed and rebuilt as house 311C during the next phase, see A51.
Orientation	NW–SE, entrance presumably in the northwest
Lay-out	Triangular, at least two rooms
Size	Ca. 14 m ² uncovered: Eastern room 2.95 x 3.85 m Western room 1.60 x 2.55 m
Walls	The fundament was well made of flattish stones. The northern wall was preserved up to 1.20 m. Four upstanding stones were placed outside but in front of the north-eastern corner. The partition wall was not well constructed. The walls were ca. 0.50–0.95 m wide.
Modifications	Unclear if the partition wall dated to phase 5 or phase 6 early. At a certain moment (unclear if this is during phase 5 or phase 6 early) a new eastern wall was constructed, next to/partly on top of the western wall of house 316A/318B, which had so far been used as the eastern wall of house 311B.
Floor	Two floors were identified, presumably made of clay. The second floor in the western room was repaired in the south.
Furnishings	None preserved of the first phase. It was suggested that the house was well cleaned. Second use phase: plaster was preserved along the walls. Pithos pits were dug into the floor, which were strengthened with stones.
Finds	No finds were ascribed to the first phase. However, many finds were ascribed to the second use phase, due to collapse of the house. Eastern room: fragments of three pithoi, a grinder, a bowl, a bone tool, four Grey Minyan bowl feet, pierced horn tool, mouth of jug, small jug, painted amphora, amphora, two funnels, grinder, amphora, painted jug, painted vessel, Grey Minyan cup. Western room: fragment of pithos, two Grey Minyan bowl feet, and a bone tool.
Activities	Presumably all household activities.
Date	MH II, construction in MBA phase 5 and destruction in phase 5 late or phase 6 early.
References	Maran 1992a, 2007
Illustration	After Maran 1992a, Plan VIIA

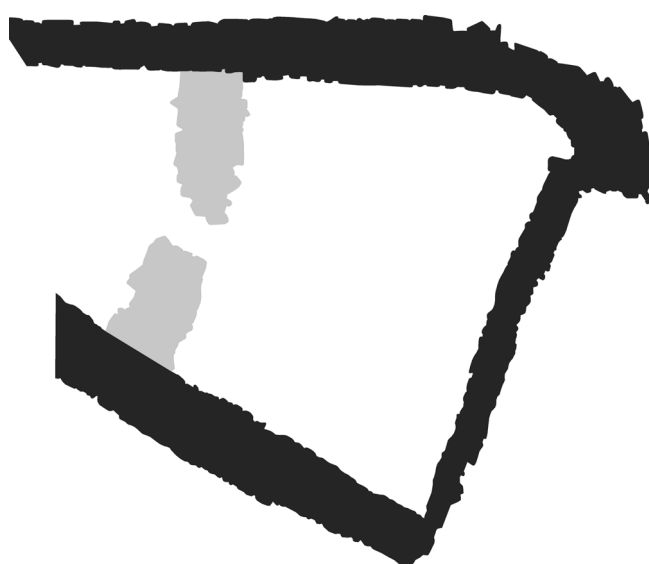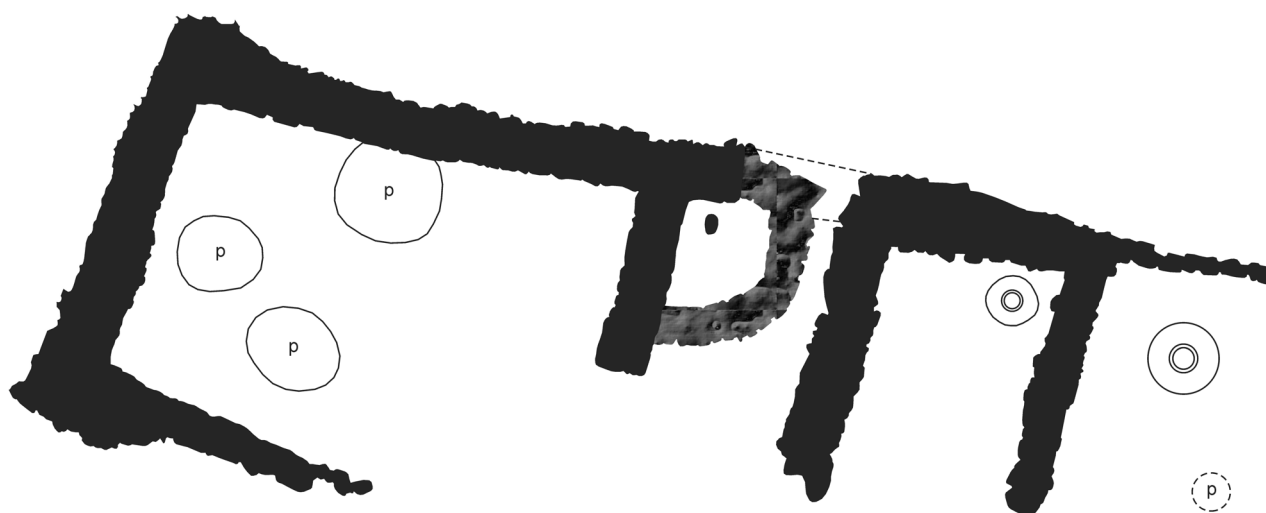

A48 Pevkakia house 310A1	
Preservation	Well preserved, only a small part of the northern wall was unexcavated. It is not certain if an opening in the southern wall was an entrance or a disturbance.
Desertion	Restructured as house 310A2 during the next phase, see A52.
Orientation	E–W, entrance in the west
Lay-out	Rectangular, two rooms and a triangular-like entrance area.
Size	Ca. 47 m ² : Storage in entrance area 2.25 x 0.95 m. Main room 7.60 x 4.00 m (published 7.60 x 4.40 m, but perhaps these are outer measurements?). Back room 4.00 x 3.60 m (published 4.00 x 3.80 m, but perhaps these are outer measurements?).
Walls	Four or five courses of stones, placed in two rows, interlined with one or two courses of flat stones set in clay. The northern wall was built against the hillside. The southern wall was later strengthened on the inside of the room with a small, deep founded wall. The southern wall enclosing the entrance area was lower than the main walls of the house. The walls were ca. 0.55–0.80 m wide.
Modifications	The entrance to the back room was later closed off. The hearth along the north wall showed three use phases, but these were not described.
Floor	The floor of the entrance area was paved with stone plates. The floor of the storage room was made of yellow clay. The threshold was marked with flat stones, and from there one had to step down into the main room. The main room had a grey clay floor, the back room a yellow clay floor.
Furnishings	Entrance area: storage and a posthole (perhaps to support the roof of the entrance area). Main room: a door socket was located next to the entrance. Central hearth, and another hearth along the north wall. A platform of stone and mud brick next to the central hearth was perhaps used for support of the roof. A mud brick built cist was located in the north-eastern corner and stone plaster in the north-western corner. Back room: a door socket was located beside the entrance, an in situ pithos, and several pits for pithoi. A child burial with a marker above it is located in the main room beside the cist, but it is unclear if this burial is contemporary with the house, or later.
Finds	Entrance area: a fragment of a large bowl was found in the storage Main room: many sherds were located in the central hearth.
Activities	Presumably all household activities.
Date	MH II, MBA phase 5
References	Maran 1992a
Illustration	After Maran 1992a, Plan VIIA

A49 Pevkakia structure 315	
Preservation	Moderately preserved, but only for a small part uncovered.
Desertion	Probably deserted, and probably left uninhabited, as several child burials were found in the walls of house 313B. During the next phase built upon by/rebuilt as 313B, see A53.
Orientation	E–W
Lay-out	Rectangular? Partitioned into at least two rooms. The relation between house 315 and house 313A was unclear, as the possible connecting wall between the two structures was disturbed.
Size	Ca. 28 m ² uncovered. Room 1, 1.75 x 2.40 m Room 2, 2.00 x 1.60 m
Walls	The northern wall of house 315 was of worse construction than house 313A, and also set deeper into the ground. Furthermore, it was also much thicker than the walls of other houses, probably due to the construction of the oven against the wall. A thicker wall might have been needed to cope with the heat from the oven. The walls were ca. 0.65–0.80 m wide.
Modifications	It appeared that under the oven a pit was located, which must have belonged to an older oven construction, associated with a light clay floor, and a black ash layer mixed with animal bones. On top of this ash layer a new clay floor was constructed and the new oven. As such, it seems this room had two use levels.
Floor	No floor was identified in the eastern room. In the western room a clay floor/plateau was constructed.
Features	An oven was constructed in the western room. It was made out of mud bricks, placed on a clay floor / platform, which was covered with black ash.
Finds	-
Activities	Food preparation
Date	MBA phase 6 middle, MH II
References	Maran 1992a
Illustration	After Maran 1992a, Plan VIIB


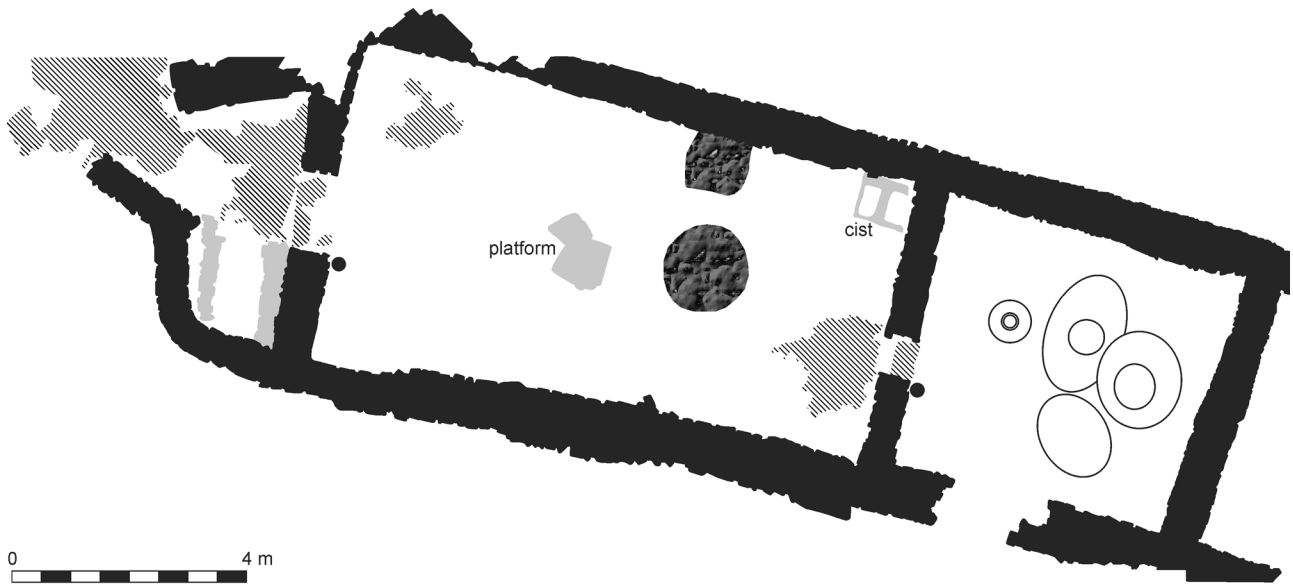


A50 Pevkakia structure 313A

Preservation	Seemingly well preserved walls, though a burial intrusion in the middle of the room had disturbed most of the floor. Only part of the room was uncovered.
Desertion	During the next phase built upon by / rebuilt as 313B, see A53.
Orientation	E–W
Lay-out	Rectangular? Unclear how many rooms. The relation between houses 313A and 315 was unclear, as the possible connecting wall between the two structures was disturbed.
Size	Ca. 14 m ² (4.80 x 2.80 m) was uncovered.
Walls	The house shared the western wall with house 311C. The walls seem to have been made of two rows of stones, of large and small size. The walls were ca. 0.55 m wide.
Modifications	-
Floor	Made of grey clay.
Features	Possible pithos pit along northern wall.
Finds	-
Activities	Unclear
Date	MBA phase 6 middle, MH II
References	Maran 1992a
Illustration	After Maran 1992a, Plan VIIB



A51 Pevkakia house 311C

Preservation	Poorly preserved, stones were pulled out and some parts were unexcavated. Furthermore, the house was affected by Late Bronze Age disturbances reaching as far as the floor of the house. As such not finds were ascribed to the house.
Desertion	Probably deserted, and perhaps turned into an open cooking area.
Orientation	NW–SE, and entrance in the northern wall, which was later closed.
Lay-out	Triangular, at least one room.
Size	Ca. 20 m ² (5.60 x 3.60 m) is uncovered.
Walls	The house shared again the eastern wall with house 313A. The walls were seemingly made of two rows of stones, of large and small size, and were ca. 0.55 m wide.
Modifications	The entrance in the northern wall was later closed. Two floors were identified.
Floor	Two clay floors
Features	No features were associated with the first floor. Second floor: probably a hearth, ash pit and a large pit.
Finds	No finds were ascribed to the house, because of the intrusions.
Activities	Unclear
Date	MBA phase 6 middle, MH II
References	Maran 1992a
Illustration	After Maran 1992a, Plan VIIB

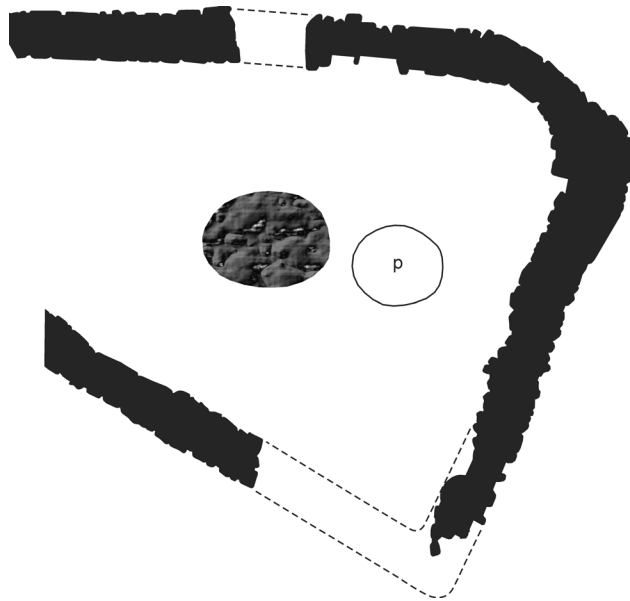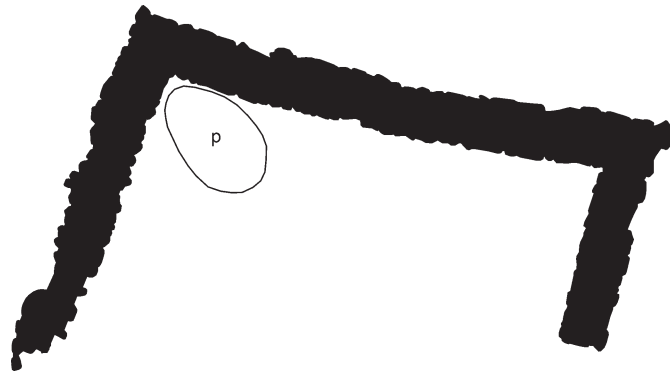



A52 Pevkakia house 310A2	
Preservation	Moderately preserved: stones from the southern wall and parts of the partition walls were pulled out.
Desertion	Rebuilt as house 310B during the next phase. The house was perhaps deserted for a while, as child burials were dug into the fill of the house in the NW corner, and in the fill besides the partition wall in the NE corner.
Orientation	E–W, entrance in the west
Lay-out	Rectangular, two rooms and an entrance area.
Size	Ca. 47 m ² Main room 7.60 x 4.00 m Back room 3.60 x 3.60 m Entrance 1.30 x 3.35 m
Walls	The walls were made of roughly two rows of stones, ca. 0.50-0.65 m wide. The northern wall showed two construction techniques: the eastern end was made of many small stones in several rows, while the western end was made of fairly large stones placed in two rows.
Modifications	-
Floor	The floor of the main room was made of yellow-brown clay.
Features	Main room: a hearth in the centre and a posthole east of the hearth. A mud brick cist in the north-eastern corner contained remains of two child burials. Another child burial was located in the north-western corner. Back room: two in situ matt painted pithoi, and additional pithoi pits, plastered with white clay. Remains of two child burials were located in one of these pits.
Finds	Sherds were located in the main hearths. Remains of two matt painted pithoi were found in the back room.
Activities	Presumably all household activities.
Date	MBA phase 6 middle, MH II
References	Maran 1992a
Illustration	After Maran 1992a, Plan VII B

A53 Pevkakia house 313B	
Preservation	Moderately preserved. Stones of the northern wall were pulled out. Furthermore, the southern and western part of the house were not preserved.
Desertion	Presumably deserted, and eventually used as part of a cemetery.
Orientation	E–W
Lay-out	Rectangular, at least four rooms.
Size	Ca. 34 m ² uncovered. From west to east: Room 1 0.80 x 2.40 m Room 2 6.70 x 1.75 m Room 3 1.70 x 1.90 m
Walls	Made of one or two rows of stone, ca. 0.55-0.70 m wide. Not described in the publication.
Modifications	-
Floor	A clay floor was located in the main room. Floors were identified in the other rooms, but not described.
Features	Two pithos pits were located along the north wall. Fragments of an in situ pithos were located in the north-eastern corner. An oval brick platform was located in the middle of the room. A stone construction was located in the third room, perhaps the base of a storage structure. A marked child grave was located along the eastern wall of the main room, and two child graves were recovered in the walls.
Finds	Fragments of two pithoi.
Activities	Presumably all household activities.
Date	MBA phase 6 late, MH II
References	Maran 1992a
Illustration	After Maran 1992a, Plan VIII A

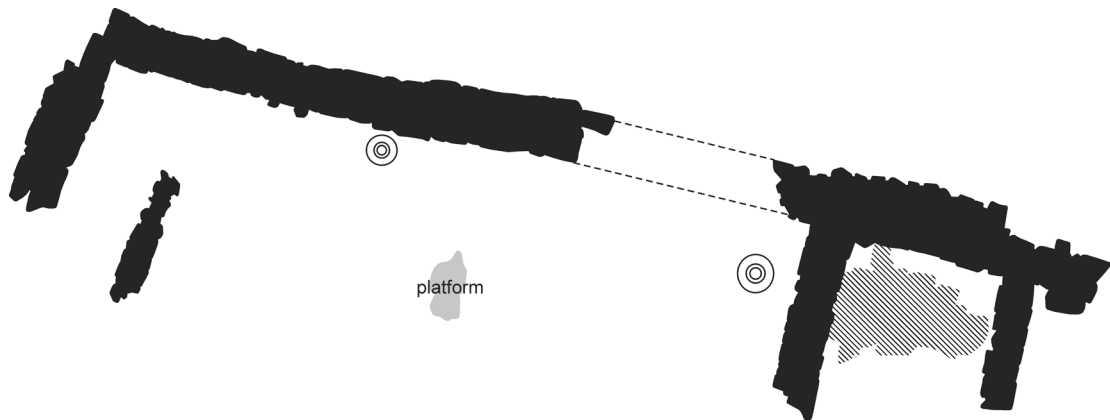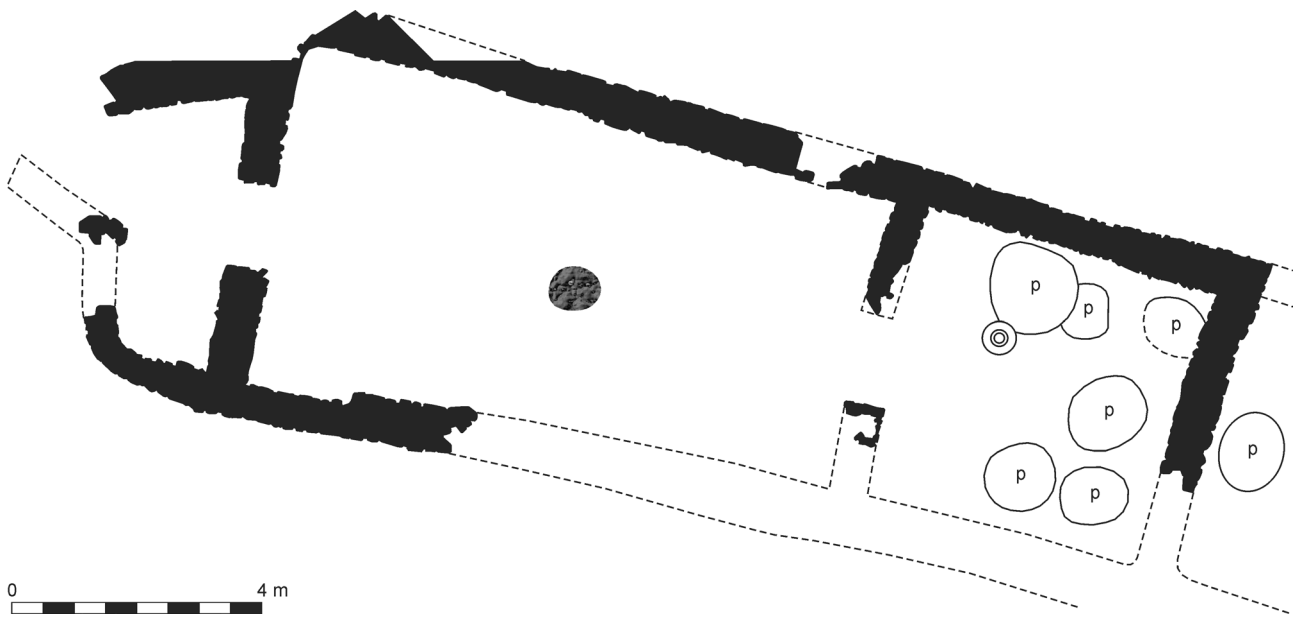

A54 Pevkakia house 310B	
Preservation	Moderately preserved. Stones of the southern wall and partition wall were pulled out, or disturbed by the digging of graves.
Desertion	Presumably deserted, and eventually used as part of a cemetery.
Orientation	E–W, entrance in the west
Lay-out	Rectangular, probably three rooms and an entrance area.
Size	Ca. 48 m ² Room 1 4.65 x 4.00 m (published 4.80 x 4.20) Room 2 3.05 x 4.00 m (published 3.10 x 4.00) Room 3 3.70 x 4.00 m (published 3.70 x 3.90) The published measurements are different from the ones taken by me, which are based on the published plans. Perhaps the published measurements are from the outer walls.
Walls	In the northern wall were three niches, presumably for wooden poles to strengthen the wall or support the roof. The walls were ca. 0.55–0.70 m wide.
Modifications	Some modifications must have taken place, considering the fact that an old hearth was located under the storage in the first room. However, it is unclear how this old hearth related to the use life of the house.
Floor	The entrance area was paved with stones. Remains of a clay floor and an ashy area were identified in the first room. A clay floor, which was partly paved with stones was identified in the third room.
Features	Entrance area: a pithos Room 1 northern area: three clay built support, probably for baskets, a hearth, a stone plate and mud brick cist, Room 1 southern area: a mud brick built construction, perhaps a storage, and beneath it remains of an older hearth. Built against the construction were two mud brick walls, enclosing two child burials. A third burial was located near the entrance. Room 2: the north-western corner was partitioned off with a clay wall, and on the floor were three stone plates. Perhaps this was the base for a storage. Beside it, along the northern wall were three parallel walls, on top of which were placed layers of stone plates. This was probably also a storage, like the ones constructed at Argissa. South of the first storage was a semicircle dark coloured feature located, with upright placed mud bricks around it. A mud brick closet or storage was located in the south of the room. Room 3: large hearth with stone paving around it.
Finds	Almost complete cup with high-swung handle, four almost complete vessels were found at the older hearth, grinder, rounded stone, possible miniature vessel.
Activities	Presumably all household activities.
Date	MBA phase 6 late, MH II
References	Maran 1992a
Illustration	After Maran 1992a, Plan VIIIA

A55 Pevkakia house 208	
Preservation	Poorly preserved, only part of the eastern wall and partition walls were preserved. The western part was disturbed due to later levelling operations.
Desertion	Presumably deserted, and later an oven was built on top of the eastern wall. This oven was later overbuilt by the southern wall of house 202.
Orientation	NW–SE
Lay-out	Rectangular, at least four to five rooms.
Size	Ca. 26 m ² was uncovered Room 1, 3.20 x 4.25 m Room 2, 1.35 x 4.25 m Room 3, 2.25 x 2.70 m
Walls	The sidewalls were made of large stones, while the partition walls were made of small stones in two rows. The walls were ca. 0.70–0.90 m wide.
Modifications	-
Floor	Remains of a floor were identified at a few places.
Features	Room 1: oven, possibly doomed, and a rounded stone plate beside it Room 2: remains of pits, lined with stones Room 4: a pit lined with clay
Finds	-
Activities	Unclear
Date	MBA phase 5–phase 6 middle, MH II
References	Maran 1992a
Illustration	After Maran 1992a, Plan X

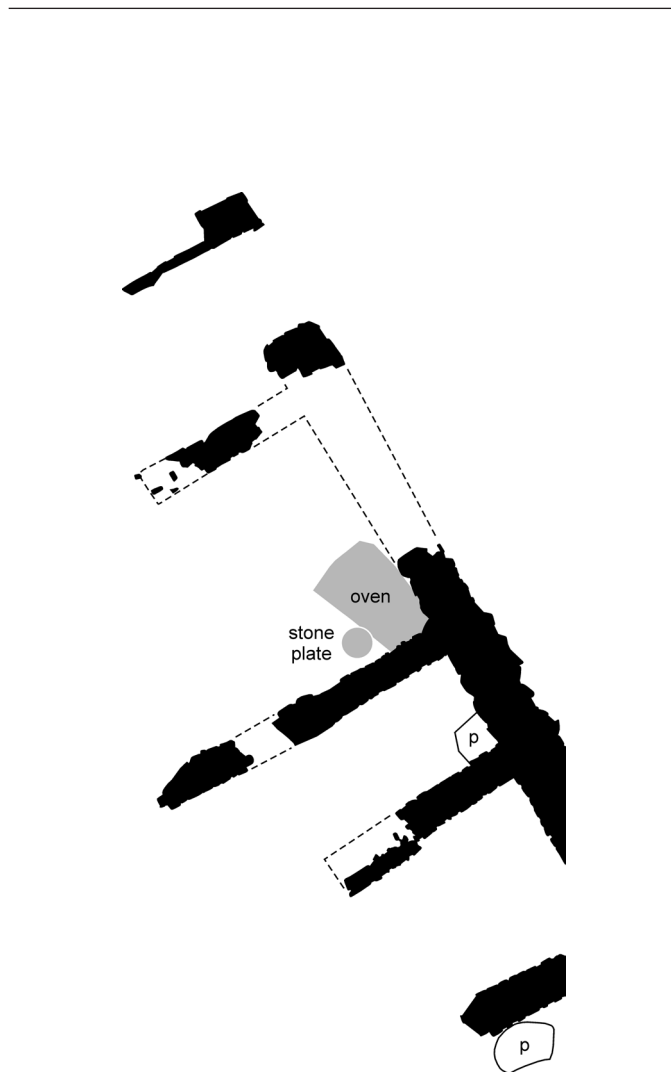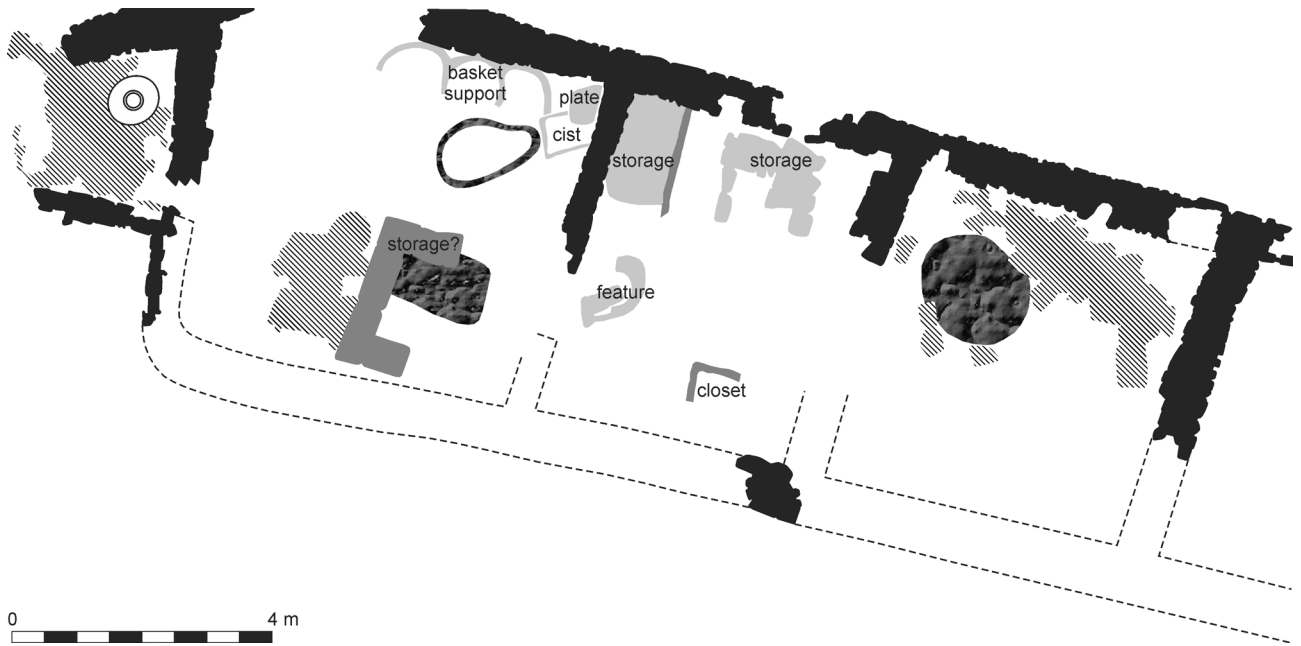



A56 Pevkakia house 202	
Preservation	Seemingly reasonably preserved, but uncovered for only a small part.
Desertion	Presumably deserted, and eventually partly used as a graveyard.
Orientation	NW–SE
Lay-out	Rectangular, at least two rooms
Size	Room 1 was uncovered for ca. 6 m ² (3.05 x 2.00 m).
Walls	Made of two rows of stones, placed apart. Especially small stones seem to have been used. The walls were ca. 0.55–0.65 m wide.
Modifications	-
Floor	Yellow clay floor.
Features	Room 1: Parts of the northern and western wall were plastered with yellow clay, creating a clay bench. Possibly a pit.
Finds	On the clay bench: four spindle whorls and many animal bones. Eight terracotta beads from under/within the clay bench. Possibly a grinder.
Activities	Presumably all household activities.
Date	MBA phase 6 (late), MH II
References	Maran 1992a
Illustration	After Maran 1992a, Plan XI

A57 Pevkakia house 207	
Preservation	Moderately preserved as it was disturbed by levelling operations and the construction of a LBA house. Furthermore, the house was not entirely uncovered.
Desertion	Presumably deserted, and eventually partly used as a graveyard.
Orientation	N–S
Lay-out	Rectangular, at least two rooms.
Size	Ca. 11 m ² was uncovered Room 1, 4.80 x 1.60 m Room 1, 2.30 x 1.60 m
Walls	Made of medium and small stones, roughly placed in two rows, and ca. 0.55 m wide.
Modifications	Two use levels and two floors were identified. It is unclear if the eastern wall underwent two construction phases. The plan shows partly below the eastern wall remains of a younger wall, with a somewhat different orientation.
Floor	Two floors were identified but not described.
Features	Perhaps a storage cist along the eastern wall, but this feature is not mentioned in the publication.
Finds	-
Activities	Unclear
Date	MBA phase 6 (late), MH II
References	Maran 1992a
Illustration	After Maran 1992a, Plan XI



A58 Rachmani house P	
Preservation	Well preserved, though at three places the foundation wall was disturbed.
Desertion	-
Orientation	NE–SW, with the apse in the south-west.
Lay-out	Apsidal, two rooms.
Size	Ca. 81.5 m ² NE room: 5.15 x 5.40 m SW room: 10.05 x 5.40 m
Walls	Foundations made of low dry courses of stone, 0.30 m wide. The partition wall was made of a stone foundation, which had two holes in it, presumably used for postholes.
Modifications	-
Floor	-
Furnishings	A hearth, consisting of a circle of large upright stones filled with broken pottery and beaten clay, was located in the northern room. A raised platform of beaten earth and lined with stones was located in the southern room, near the partition wall. A rectangle of stones was found near the north-western corner of the apse. The excavators suggest this was probably accidental, however it could have formed the base of an upper structure. A large vessel containing a child's burials was deposited towards the northern end of the east wall. The relation between the house and the burial was unclear.
Finds	Ascribed to the house in the publication (though this list could be incomplete) are: Two bone scrapers, bone spoon, seven bone pins, flint knife and spearhead, two obsidian flakes, horn pick, whorls, two pierced pebbles, three stone chisels, a saddle quern, eight stone rubbers, five stone pounders, a bored stone club head, a jug, Dimini ware and coarse ware. Ceramics from this stratum were published, but not specifically ascribed to the house. Among the ceramics were primarily monochrome ware, and pithoi. From the stratum came also three pieces of bronze: a drill, a pin and a lump.
Activities	Presumably all household activities
Date	EH III. Parallels with MBA phases 1-2 at Argissa
References	Wace and Thompson 1912; Warner 1979; Maran 1992a; excavation notebooks
Illustration	After Wace and Thompson 1912, figure 17


A59 Rini	
Preservation	Reasonably preserved: a part of the southern apse is missing and the eastern wall is partly destroyed.
Desertion	-
Orientation	N–S
Lay-out	Ellipsoid, rectangular main room, and two partitioned apses on both sides.
Size	Ca. 24 m ² : Northern apse: 1.70 x 3.90 m Main room: 3.30 x 3.60 m Southern apse: 1.60 x 2.90 m
Walls	Made of small, rough stones, carelessly made. Preserved until a height of 0.60 m, and ca. 0.35-0.50 m wide.
Modifications	-
Floor	-
Furnishings	-
Finds	-
Activities	-
Date	EH III
References	Wace and Thompson 1912
Illustration	After Wace and Thompson 1912, figure 80

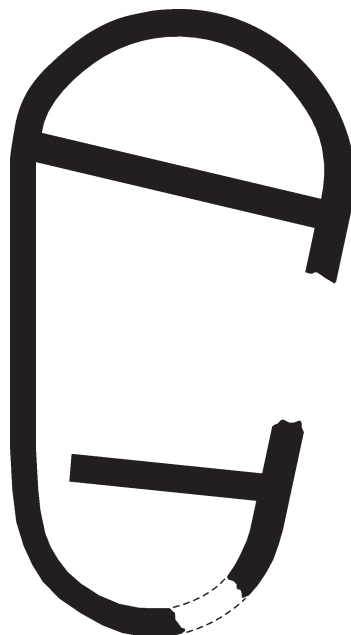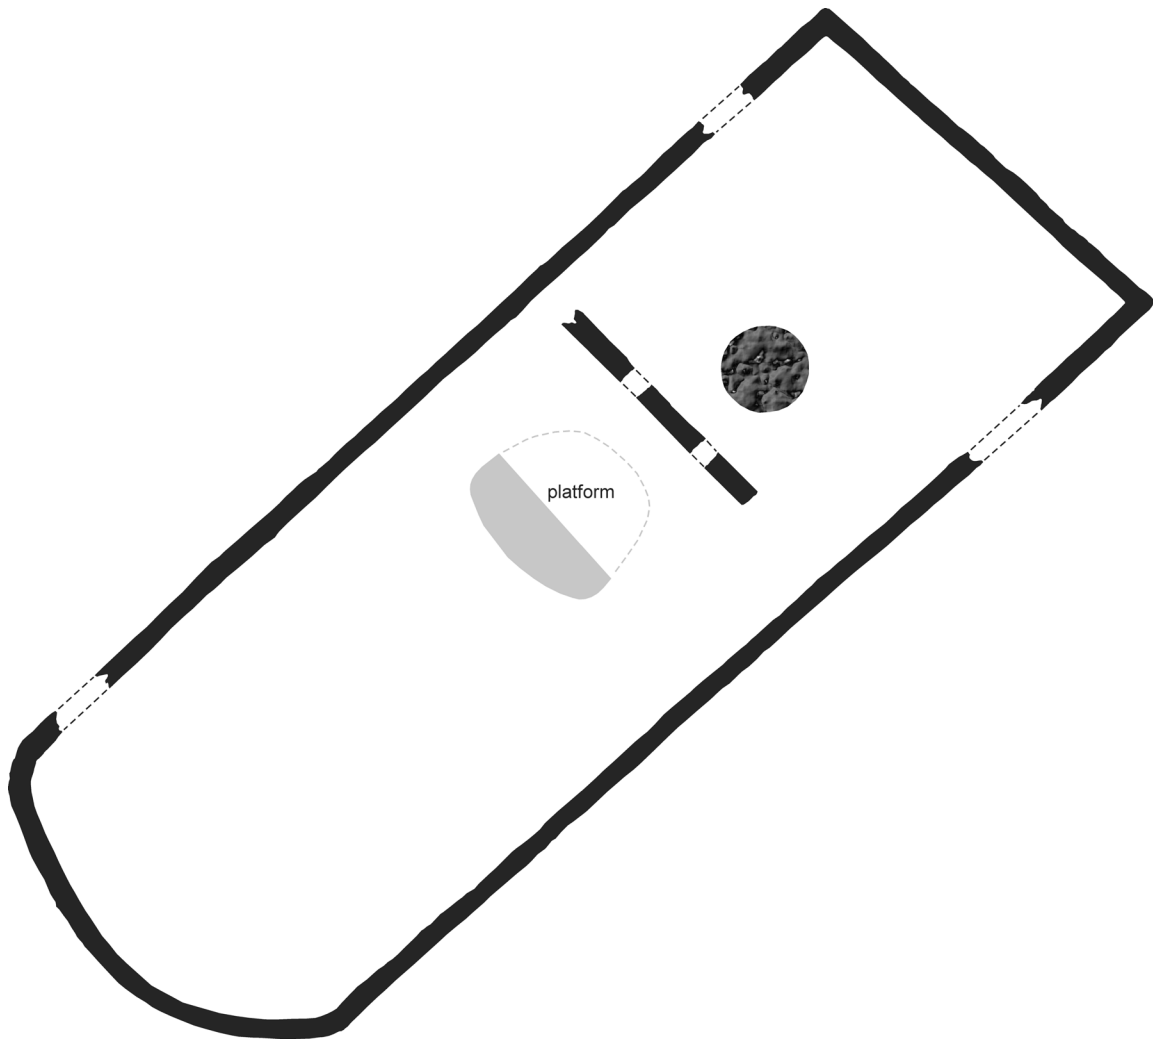

Catalogue B Phocis and Phthiotis

Bo1 Kirrha Pappa plot house A phase 1	
Preservation	Well preserved
Desertion	Earthquake, but rebuilt
Orientation	E–W
Lay-out	At least two room. The back(?) room was also partitioned into two areas.
Size	-
Walls	Stone foundations.
Modifications	Several floors. House was affected by large fire, and probably later by a strong earthquake.
Floor	Several successive floors, not described but probably made from stamped clay.
Features	Two clay benches or partition walls in the main room. A hearth was in contact with the western bench, and a pithos was located north of the eastern bench. Unfortunately, these features could not be identified by me in the published plan. East bench: 0.30 m wide and uncovered for 2.05 m in length. West bench: 0.45 m wide, and uncovered for 1.70 m in length.
Finds	MH ceramics including a fragment of a closed Bichrome vessel, a matt Painted amphora and a Grey Minyan kantharos. Tools were especially found in the northern area of room 1, and consisted of clay spindle whorls, bone tools, obsidian and chert blades, a whetstone, millstones, a chert spearhead, and two arrowheads.
Activities	All domestic activities
Date	MH I
References	Skorda 2006
Illustration	After Skorda 2006, figure 1

Bo2 Kirrha Pappa plot house A phase 2	
Preservation	Well preserved
Desertion	Fire/earthquake destruction, but rebuilt
Orientation	E–W with apse in the west
Lay-out	Apsidal, at least two rooms
Size	At least 23 m ² uncovered. Apse 4 m radius Main room: uncovered for 4.00 x 4.00 m
Walls	The walls were carefully made, and placed above the walls of the previous phase. The walls were 0.50 m wide and preserved up to 0.20–0.50 m.
Modifications	The house was twice repaired, and three successive floors were identified. After destruction by a strong earthquake early during phase 2, a new northern wall was constructed to support the older wall. Second destruction was caused by fire. On the third floor an ellipsoid hearth is built. Final destruction was caused by a heavy earthquake and successive fire, which disrupted the walls and displaced parts of the floors.
Floor	Three successive floors were identified in both rooms. The floors were not described but probably made from stamped clay.
Features	From beginning onwards a hearth in room 2. On the third floor an ellipsoid hearth (80 cm Ø) was made, with a small shallow hole (8 cm Ø) next to it. Unfortunately, these features could not be identified by me in the published plan.
Finds	First floor: in the western area, near remains of a possible hearth, several finds were recovered: cup, stone tools, bones and a bone disc (perhaps a hanger). Second floor: pithoid burnished vessel, animal bones, stone hammer, millstone and a cooking vessel. Third floor: thick destruction layer with broken vessels. Two skulls were found above the floor, between the ashes and fallen stones.
Activities	All domestic activities
Date	MH II
References	Skorda 2006
Illustration	After Skorda 2006, figure 1





Bo3 Kirrha Pappa plot house A phase 3


Preservation	Well preserved
Desertion	Fire destruction and deserted. Area partly turned into cemetery.
Orientation	E–W
Lay-out	Rectangular, at least two rooms.
Size	Back room: 1.75 x 4.00 m Main room: unclear
Walls	Not described, but probably comparable to phase 2 of the house.
Modifications	New floor
Floor	Two successive floors, not described but probably made from stamped clay
Features	-
Finds	Many food remains were found in room 2: animal bones and sea shells, especially molluscs. Many tools were found in both rooms, including: bone awls, fragments of whetstones and millstones, obsidian and chert blades, clay spindle whorls, and half of a perforated stone hammer.
Activities	All domestic activities
Date	MH II
References	Skorda 2006
Illustration	After Skorda 2006, figure 1

Bo4 Kirrha Bechlivanopoulou plot house B


Preservation	Moderately preserved, though not entirely excavated and only preliminarily published.
Desertion	Collapsed, possibly due to seismic activity.
Orientation	N–S, with the apse in the north.
Lay-out	Apsidal, at least two rooms.
Size	At least 33 m ² Apse: 3.70 x 4.70 m Main room: 4.20 x 4.20 m
Walls	Two rows of stones. Rather irregular laid walls The partition wall is made of smaller stones than the sidewalls, and seems of better construction.
Floor	-
Features	-
Modifications	Two occupational phases, one exactly on top of the other, were identified. Remains of two walls were uncovered beside the partition wall. It is unclear to me if these are remains of an older partition wall, or perhaps two platforms.
Finds	A pithos, placed along the partition wall in the main room. Apparently 16 broken but complete vessels: 10 Minyan, one Matt painted, and five coarse ware. The coarse ware vessels were placed along the inner side of the apse. Among the ceramics were only a few Minyan vessels, but more Red and Yellow Minyan, indicating a late MH date.
Activities	Presumably all domestic activities
Date	MH late / MH III
References	Skorda 1992
Illustration	After Skorda 1992, figure 1

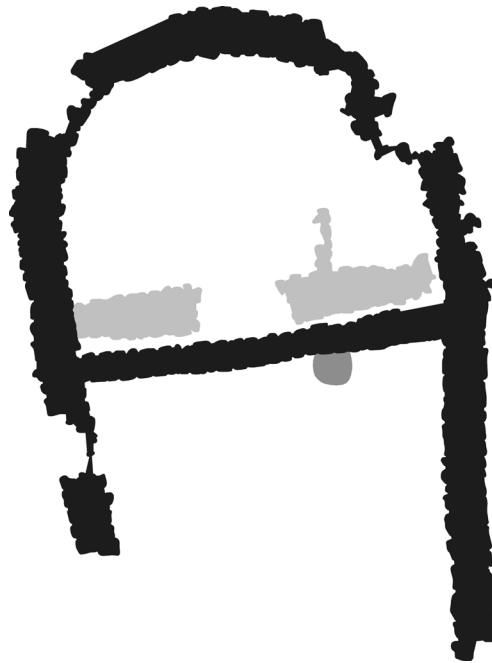

Boş Kırha house trench B	
Preservation	Reasonably well preserved: some sections of the walls were disturbed. In addition, not the whole house and court were uncovered.
Desertion	Presumably deserted?
Orientation	NW–SE
Lay-out	Rectangular, at least two rooms and a court. The communication between the different areas was not entirely clear.
Size	Uncovered for at least 74 m ² Room d 13.25 x 5.00 m Room a 3.00 x 1.75 m Room c 1.00 x 1.75 m Court b at least 6.50 m long, and 3.50–4.50 m wide.
Walls	-
Modifications	-
Floor	-
Features	In the court, a partitioned structure was located, inside of which remains of black ash mixed with animal bones were recovered. Presumably a cooking structure.
Finds	-
Activities	Presumably all domestic activities.
Date	MH III–LH I
References	Dor et al 1960
Illustration	After Dor et al 1960, Plan VII

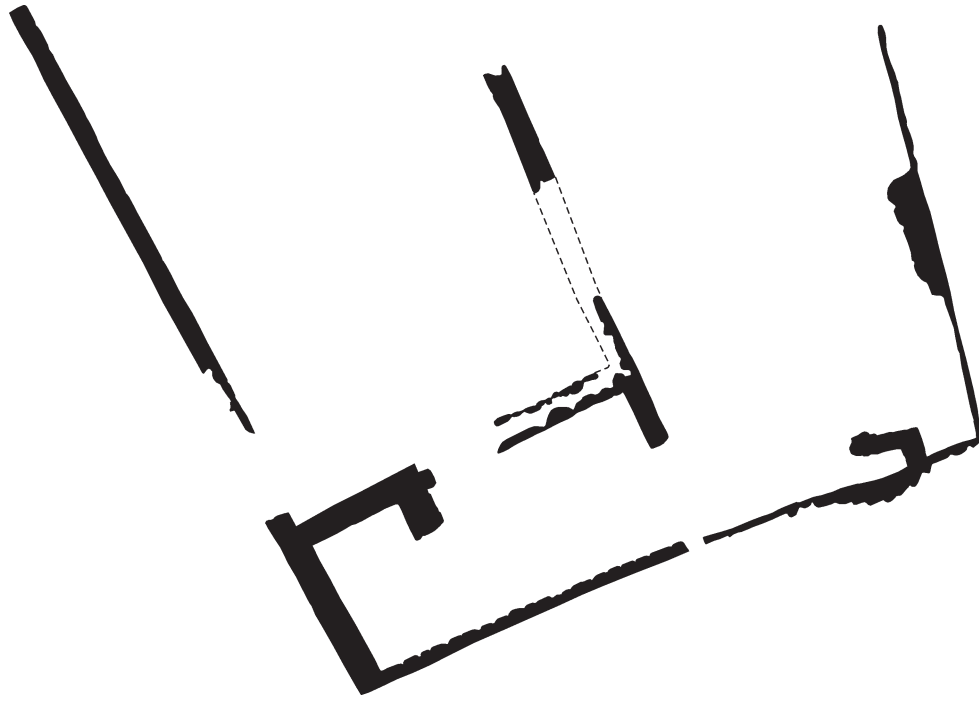

Bo6 Kirrha house A-E, Trench D	
Preservation	Reasonably well preserved.
Desertion	Presumably deserted?
Orientation	NW–SE
Lay-out	Rectangular, five rooms. Room E was an anteroom or porch. A similar room might have been located in front of room A, as the sidewalls continue further NW.
Size	Ca. 70 m ² Room a: 2.40 x 4.75 m Room b: 4.20 x 4.75 m Room c: 2.70 x 4.75 m Room d: 4.50 x 4.75 m Room e: 1.00 x 4.75 m
Walls	The stones used in the walls of rooms A and B, seem to have been less worked, than the stones used for the construction of rooms C and D. The stone of the walls of A and B, were placed in two or three rows, but rather clumsily in places, and not as neat as in the walls of rooms C and D.
Modifications	Considering the stone plan, it seems as if rooms C–E were constructed first, while rooms A and B were a later attachment: the western sidewall of rooms C–E, and the parting wall between rooms C and B, seem to form a neat right-angle, to which the western sidewall of room B was attached later.
Floor	Stamped clay
Features	A hearth in the centre of room b, marked with a thin circle of white ash. The doors / entrances were possibly marked with a threshold.
Finds	-
Activities	Presumably all domestic activities.
Date	LH I–II
References	Dor et al 1960 and Philippa-Touchais 2010
Illustration	After Dor et al 1960, Plan XII


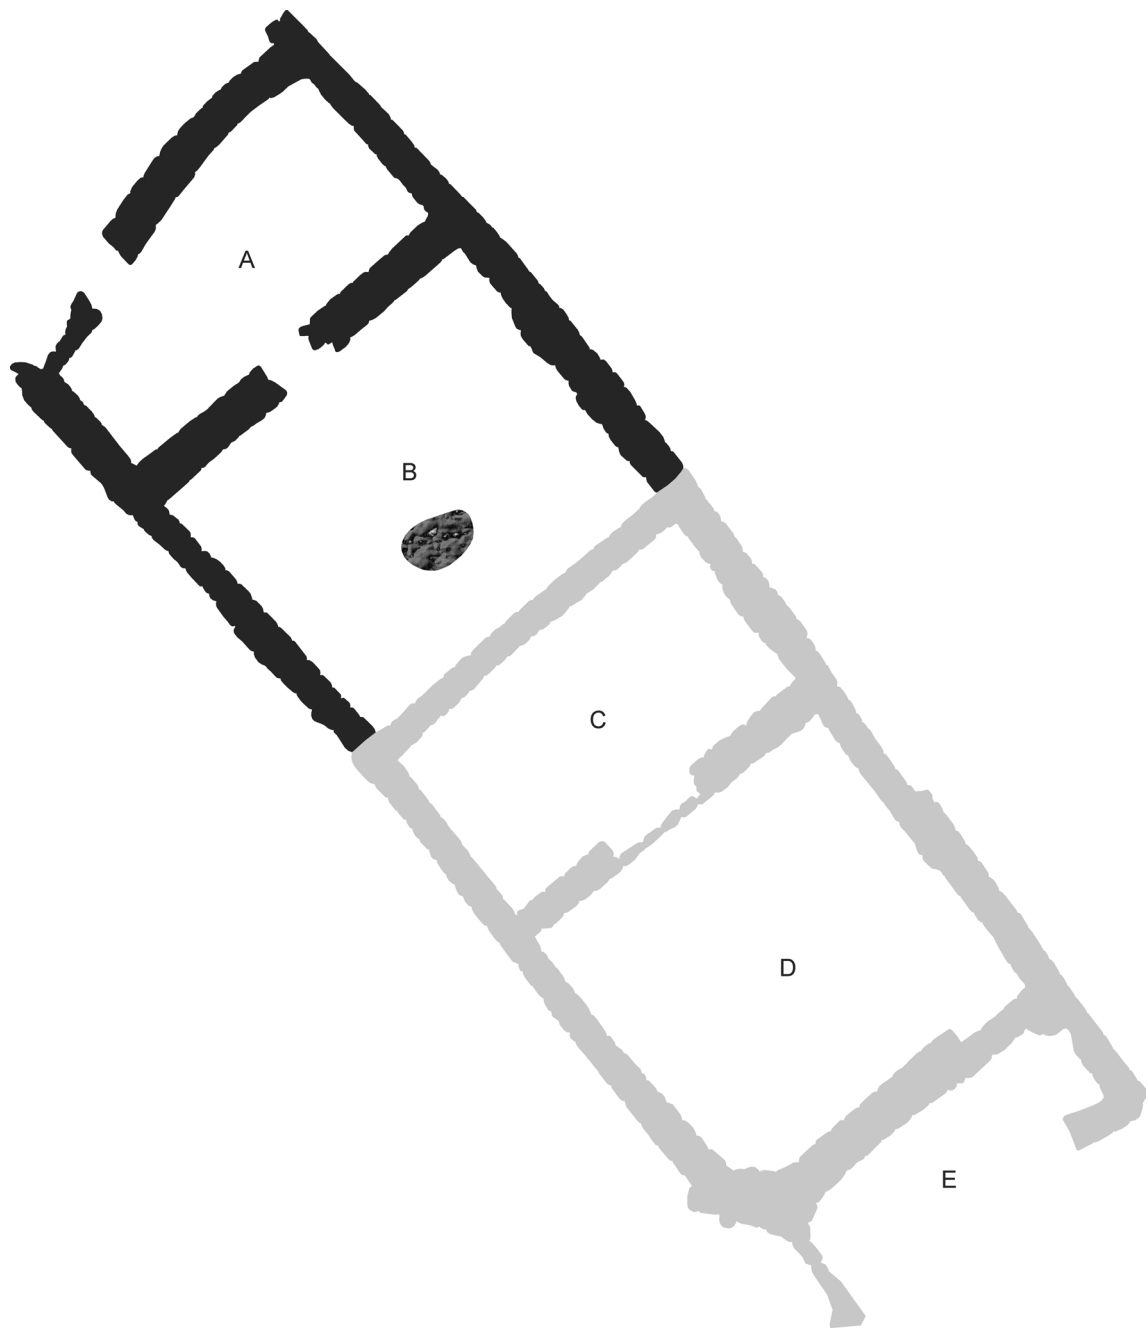


Bo7 Kirrha structure H-J, Trench D

Preservation	Not well preserved. The walls of the structures seem to have continued further west and south.
Desertion	Presumably deserted?
Orientation	NW–SE
Lay-out	Rectangular, but in an irregular fashion. Structure J may have been partitioned into two or three rooms.
Size	Structure H: 9 m ² (3.70 x 2.50 m) Structure J: 14 m ² (5.40 x 2.60 m)
Walls	The walls were of irregular layout and width. One to four rows of irregular laid and sized stones formed the width of the walls.
Modifications	-
Floor	-
Features	-
Finds	-
Activities	Storage? Animal pen?
Date	LH I–II
References	Dor et al 1960 and Philippa-Touchais 2010
Illustration	After Dor et al 1960, Plan XII

Bo8 Kirrha structure F-G, Trench D



Preservation	Well preserved
Desertion	Presumably deserted?
Orientation	NW–SE, entrance in the NW
Lay-out	Rectangular, two rooms
Size	Ca. 35 m ² Room f: 8.50 x 2.00–3.00 m Room g: 3.25 x 3.50 m
Walls	Two rows of irregular stones, sometimes a stone covered the whole width of the foundation.
Modifications	-
Floor	-
Features	No features mentioned. Perhaps a stone platform (or outbreak of the wall?) in the NW corner of room F, functioned as a step over the wall between F and G.
Finds	LH ceramics
Activities	Storage?
Date	LH I–II (or later?)
References	Dor et al 1960 and Philippa-Touchais 2010
Illustration	After Dor et al 1960, Plan XII

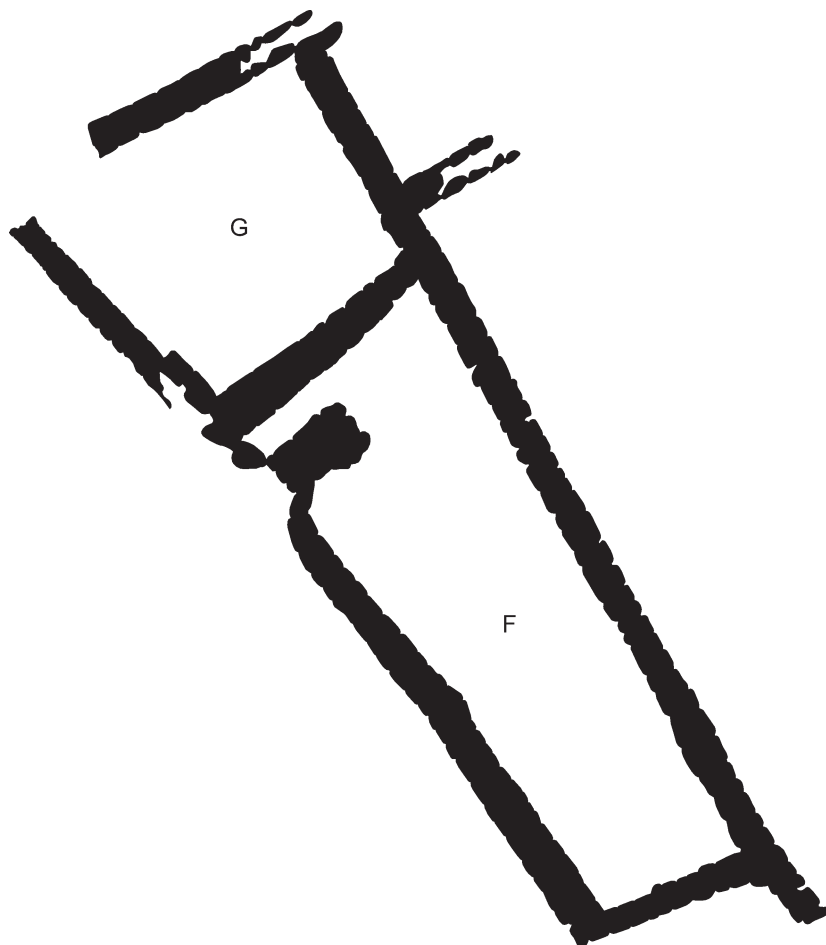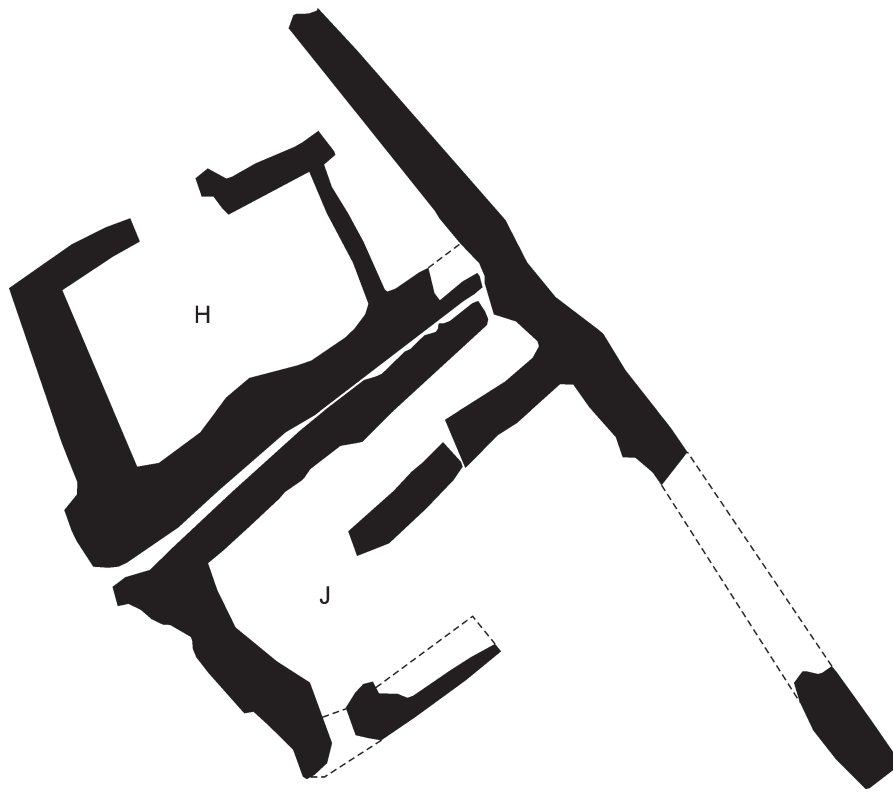


Bog Kirrha room A, Trench C	
Preservation	Reasonably well preserved, though it seems that the western wall is not preserved towards the north. In addition, it is unclear if the construction continues north or south.
Desertion	Presumably deserted?
Orientation	NW–SE, 0.90 m wide entrance in the east.
Lay-out	Rectangular / trapezoidal, at least one room
Size	Ca 14.5 m ² (4.75 x 2.75-3.40 m)
Walls	Two rows of stones. The NW and SE walls are made of large stones than the NE and SE side walls.
Modifications	-
Floor	Stamped clay
Features	-
Finds	-
Activities	Unclear, due to limited amount of data.
Date	LH I–II (or later?)
References	Dor et al 1960
Illustration	After Dor et al 1960, Plan X

B10 Kirrha Kolliia plot	
Preservation	Moderately preserved, but not entirely uncovered.
Desertion	Presumably deserted?
Orientation	N–S
Lay-out	Unclear, but at least two rooms. Furthermore, it seems that an additional room was added to the eastern side of the house. A horseshoe-shaped structure was located east of the house, touching the added room on the side.
Size	Uncovered for at least 14+ m ² Main room: 6.40+ x 10.60 m Attached room: 9.60+ x 3.00 m
Walls	Seemingly not well made: foundation walls were only one stone wide.
Floor	Six floor layers were identified, made of hard stamped earth and traces of ashes.
Features	Two hearths with clay rim. A horseshoe-shaped structure was located east of the house, touching the added room on the side.
Modifications	At least five new floors were constructed.
Finds	-
Activities	-
Date	MH – a more specific date is not given.
References	Tsipopoulou 1980
Illustration	After Tsipopoulou 1980, figure 1

B11 Kirrha Kalogirou-Palantza plot apsidal house	
Preservation	Well preserved, but only the apse was uncovered.
Desertion	Fire destruction
Orientation	E–W, with apse in the east
Lay-out	Apsidal, at least apse and main room
Size	The apse measured 3.60 m wide x 1.90 m deep
Walls	The wall of the apse was 0.50 m wide and preserved up to 0.55 m.
Modifications	At least four floors were identified.
Floor	Unclear, probably clay as four different floors could be identified.
Features	A pithos grave, and a pit grave were dug into the floor, unclear if synchronous with the house. These could not be identified by me in the published plan.
Finds	Burnt ash, clay and wood.
Activities	-
Date	MH – a more specific date is not given.
References	Chatzimichail-Skorda 1989
Illustration	After Chatzimichail-Skorda 1989, figure 12

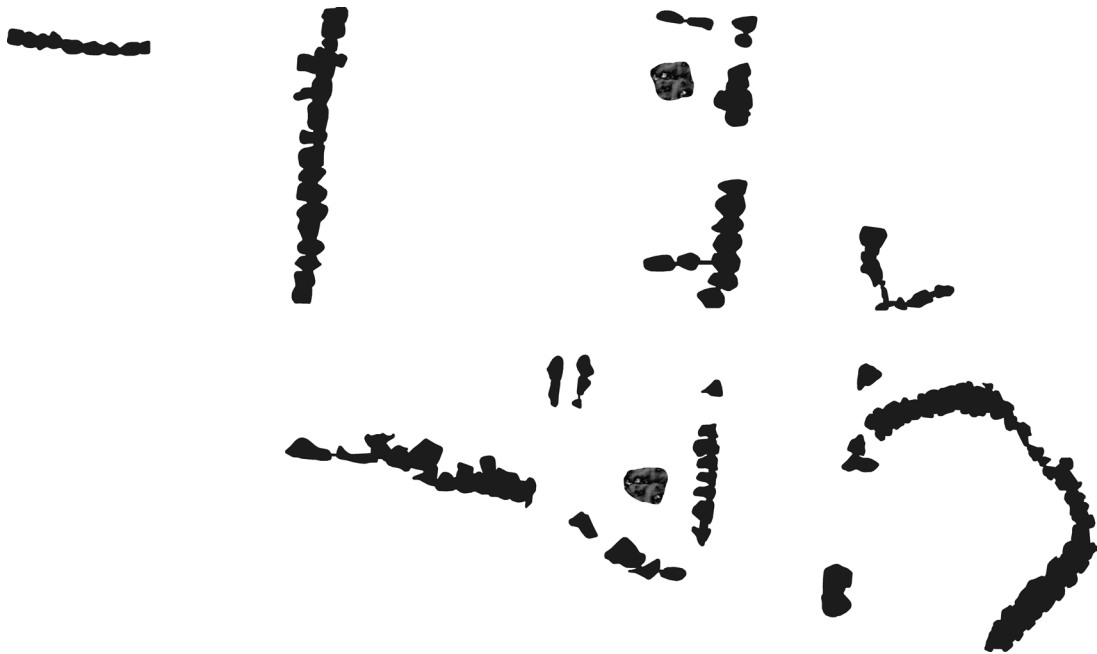
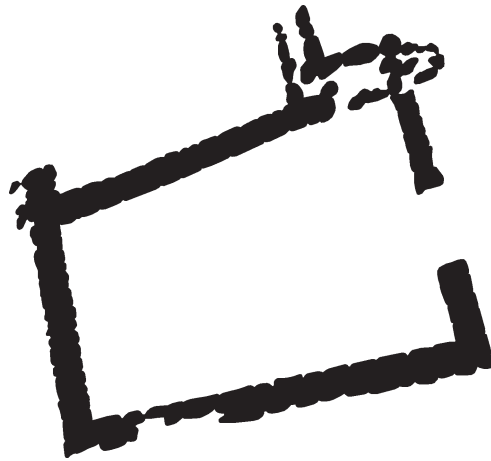


B12 Krisa house A	
Preservation	Reasonably well preserved.
Desertion	Deserted?
Orientation	NE–SW. A 1.5 m wide entrance in the northwest led into room A. A 1.25 m wide entrance led from room A into room B. Two entrances, one in the east and one in the northwest, led into room C.
Lay-out	Rectangular, three rooms and a partly partitioned court on the south-eastern side.
Size	Ca. 73 m ²
Walls	Walls at Krisa were made of coarse limestone blocks set in clay. The walls of house A were of an irregular width: 0.50–0.90 m wide.
Modifications	-
Floor	-
Features	Two pi-shaped structures, made of small stones set in clay, were located in room C. Structure b measured ca. 0.80 x 0.75 m, and structure c ca. 0.50 x 0.50 m. The floor of the structures consisted of clay mixed with small pieces of animal bones. Furthermore, a considerable amount of ashes was found. A comparison is made with storage bin type 2 at Eutresis.
Finds	Minyan ware was primarily recovered in rooms A and B, furthermore a large pedestaled bowl and a small vase. In room C much Matt Painted ware was found, and coarse wares were found near the pi-shaped structures.
Activities	Rooms A and B were likely to have been living areas, while room C was for cooking and possibly storage.
Date	MH II
References	Jannoray and van Effenterre 1937
Illustration	After Jannoray and van Effenterre 1937, figure 3

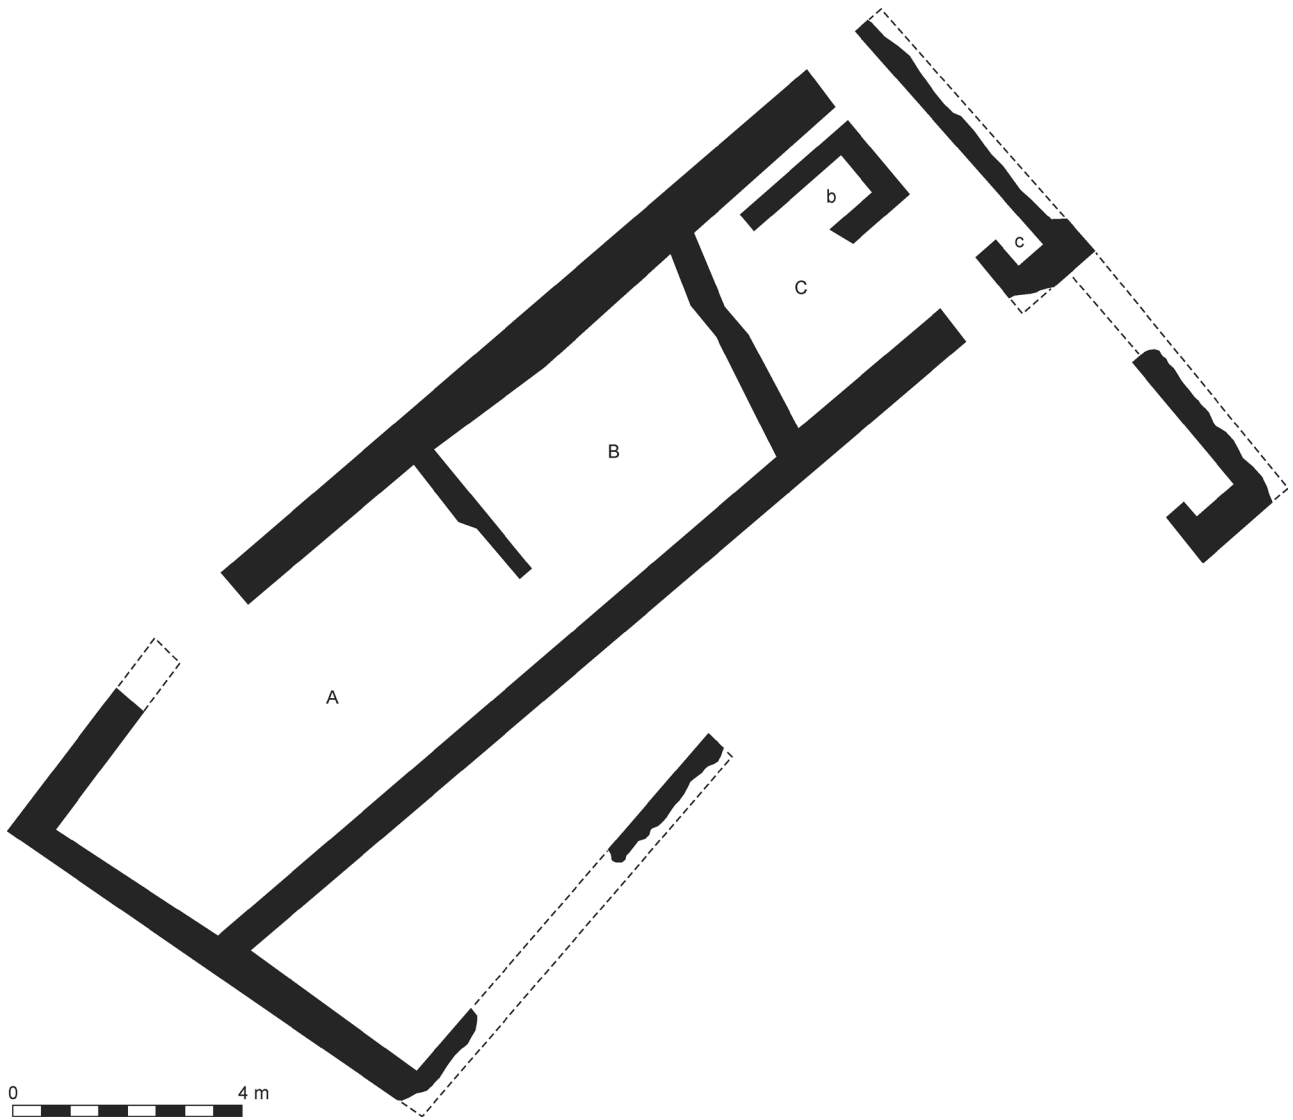



B13 Kriša house B	
Preservation	Seemingly well preserved, but only the southern section was uncovered.
Desertion	Overbuilt by house C during MH III
Orientation	NW–SE
Lay-out	Rectangular (?), seemingly partitioned into several small rooms.
Size	At least 12 m ² was uncovered
Walls	Walls at Kriša were made of coarse limestone blocks set in clay.
Modifications	-
Floor	-
Features	Cist graves 10 and 11 were believed to be contemporary with the house (they were found below the level of the walls, and the floor of the house covered the graves). Towards the south of the house, a drain was located, running NW–SE.
Finds	Grey Minyan and Matt Painted ceramics
Activities	-
Date	MH II
References	Jannoray and van Effenterre 1937
Illustration	After Jannoray and van Effenterre 1937, figure 5

B14 Kriša house D	
Preservation	Moderately well preserved. Several sections of walls were disturbed.
Desertion	Fire destruction. In the room a thick layer of clay was recovered, which was interpreted as mud brick melt. Furthermore, the pithoi were said to be recovered in the middle of ash remains.
Orientation	NW–SE, with the apse in the SE and the entrance in the west corner.
Lay-out	D-shaped, one room.
Size	Ca. 14 m ² (4.00 x 3.60 m)
Walls	Walls at Kriša were made of coarse limestone blocks set in clay. The walls were ca. 0.70 m thick, and preserved until a height of 0.84 m. The top of the northern wall seemed to have been levelled, to support the placement of bricks.
Modifications	-
Floor	-
Features	In the middle of the room was a partly clay lined pit, 0.74 Ø. Mixed earth and ashes were found inside.
Finds	Eight pithoi, Grey Minyan and Yellow Minyan vessels (6096, 6142, 6143, 6149), and a stone seal. Possibly more finds as well, but these were unpublished.
Activities	Storage
Date	MH II (or perhaps even MH III, as it contained Yellow Minyan?)
References	Jannoray and van Effenterre 1937
Illustration	After Jannoray and van Effenterre 1937, figure 7

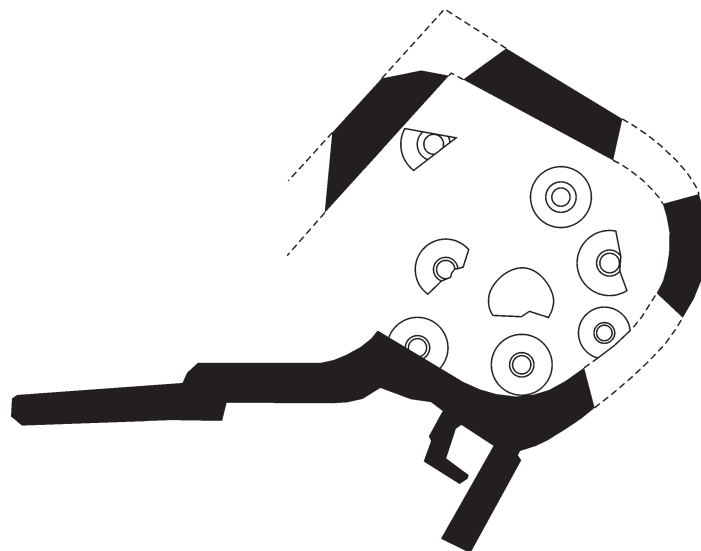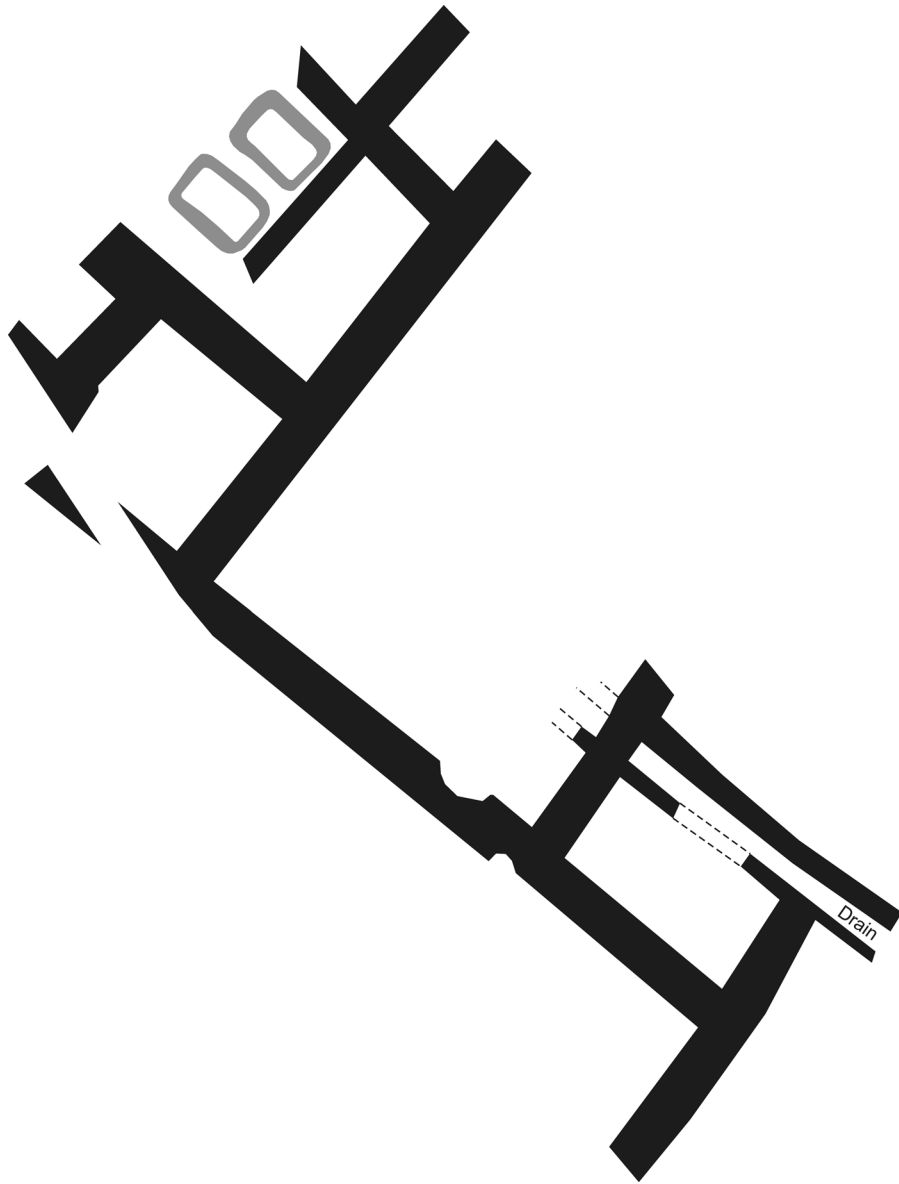



B15 Krisa house C	
Preservation	Moderately well preserved. Sections of the south and west walls were not preserved. Furthermore, it was unclear if and how this structure extended further north, as this area was not excavated.
Desertion	Possible fire destruction, as a fire separated the two MH layers of the Mycenaean layer.
Orientation	NW–SE, entrance in the east.
Lay-out	Trapezoidal, two rooms and a court.
Size	Uncovered for ca. 27 m ² Entrance room, 3.50 x 2.50 m Main room, 6.00 x 3.00 m at maximum width
Walls	Walls at Krisa were made of coarse limestone blocks set in clay. The eastern wall was not straight, which could indicate different construction phases.
Modifications	-
Floor	-
Features	-
Finds	Grey and Yellow Minyan and Matt Painted ceramics
Activities	-
Date	MH III
References	Jannoray and van Effentere 1937
Illustration	After Jannoray and van Effentere 1937, figure 5

B16 Krisa structure E	
Preservation	Well preserved
Desertion	Deserted?
Orientation	SE–NW
Lay-out	Rectangular, one room, entrance in the southwest.
Size	Ca. 16 m ² (5.20 x 3.05)
Walls	Ca. 0.80 m wide, but no details were published.
Modifications	-
Floor	-
Features	The threshold was marked by a stone (not indicated in the published plan).
Finds	Sherds of late MH / LH I data, but not specified.
Activities	-
Date	MH III–LH I constructed, and used until LH III
References	Jannoray and van Effentere 1937
Illustration	After Jannoray and van Effentere 1937, figure 15

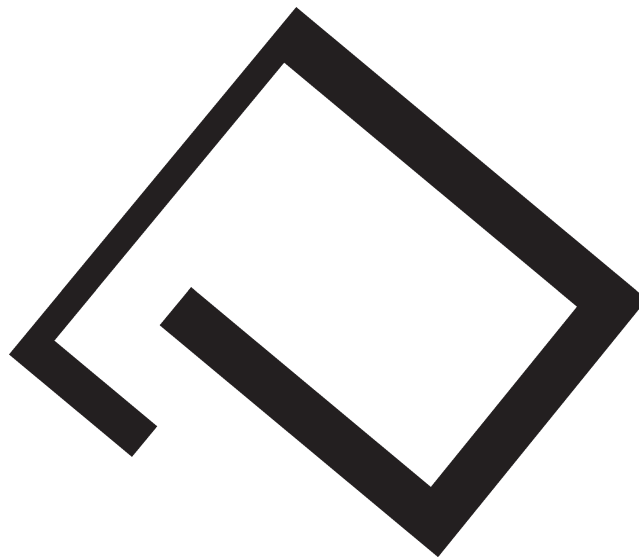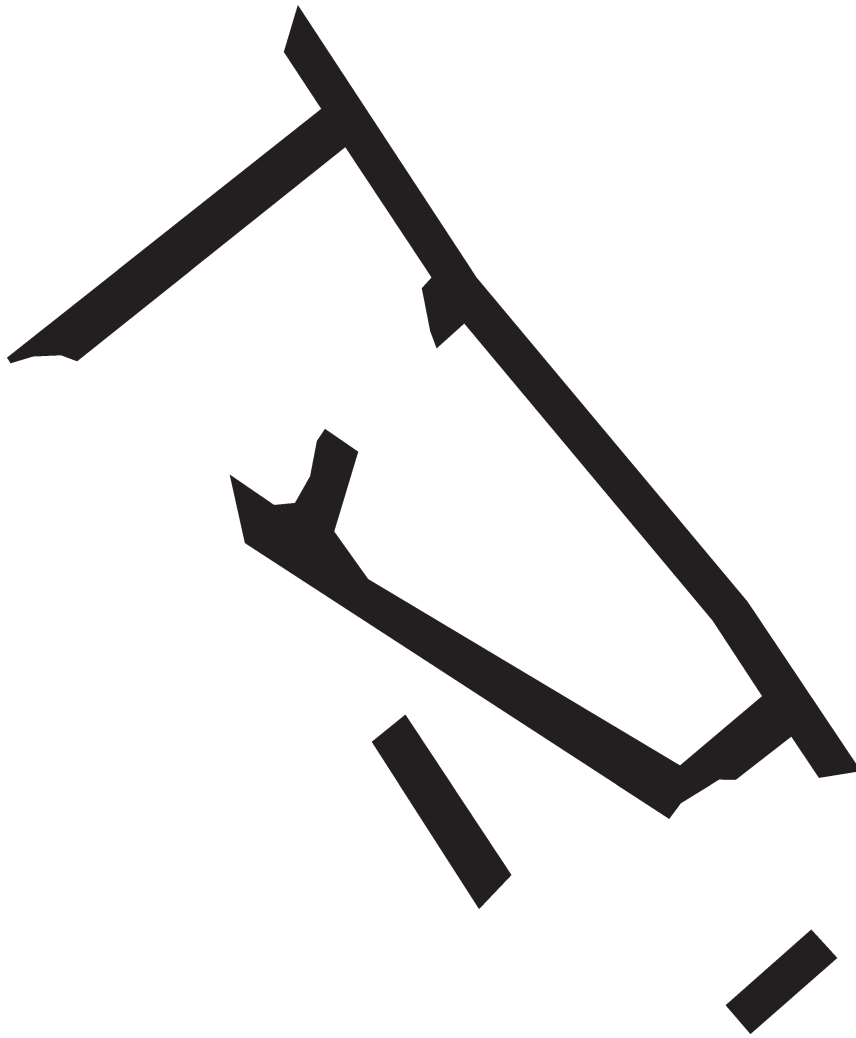



B17 Krisa house F	
Preservation	Reasonably well preserved
Desertion	Modified and extended during LH III.
Orientation	NE–SW, entrance presumably in the south-west.
Lay-out	Rectangular, main room H, corridor L, and back room G.
Size	Ca. 70 m ² Back room G: 1.50–1.80 x 6.00 m Main room H: 11.00 x 5.00 m Corridor L: 0.70 m wide
Walls	Ca. 0.80 m wide, but no details were published.
Modifications	Modified and extended towards the south during LH III.
Floor	-
Features	Two plates made of rough stone were placed on the axis of the main room. Perhaps these were column bases.
Finds	Room G: fragments of (pedestalled) bowls, cups, hydria and vessels of similar size. Corridor: LH I–II vessels, including three pedestalled bowls and a hydria, were recovered in the lower levels of the corridor.
Activities	Room G is interpreted as storage room, because of the associated ceramics. Corridor L seems to have been both a passage and a storage area.
Date	LH I–LH II, and also LH III
References	Jannoray and van Effenterre 1937
Illustration	After Jannoray and van Effenterre 1937, figure 16

B18a Lianokladhi house 1 – main building	
Preservation	Well preserved, only some disturbance due to digging of grave.
Desertion	Destroyed by fire. Above the house two cist tombs were found, containing no gifts.
Orientation	NE–SW, entrance in the south-west.
Lay-out	Irregular rectangular, two rooms.
Size	Ca. 62 m ² , Room 1: 7.70 x 5.35 m Room 2: 4.15 x 4.80 m
Walls	Small stones set in clay or mud, ca. 0.50 m wide and preserved to a height of 0.70 m. It seems likely that the walls were never higher than 0.70 m. According to the excavators the upper section of the walls and the roof were made of wattle-and-daub. The eastern wall was only preserved for one course high.
Modifications	Later attachment of room 3, to rooms 1 and 2, see A33b. Perhaps the removal of a possible partition wall in room 2, along which two pithoi were perhaps positioned. Strengthening and thickening of the northern wall over time.
Floor	The doorway from room 1 to 2 was paved with cobble stones. The floor of the main room is made of beaten earth.
Furnishings	Hearth in room 1.
Finds	In room two were five pithoi in situ, and another pithos, and eleven large, coarse pierced clay balls / loom weights. Three curved flint knives, four saws, a chip of flint, two bored celts, one sharpened bone, four flat whorls, five conical whorls, one double conoid whorl, were found in the house, but unclear where. Possibly also spools. Many ceramics were published, of which many came from the house. However, it was not specifically indicated which ones.
Activities	Presumably all household activities.
Date	Found in the third stratum. MH II
References	Wace and Thompson 1909, 1912
Illustration	After Wace and Thompson 1912, figure 137

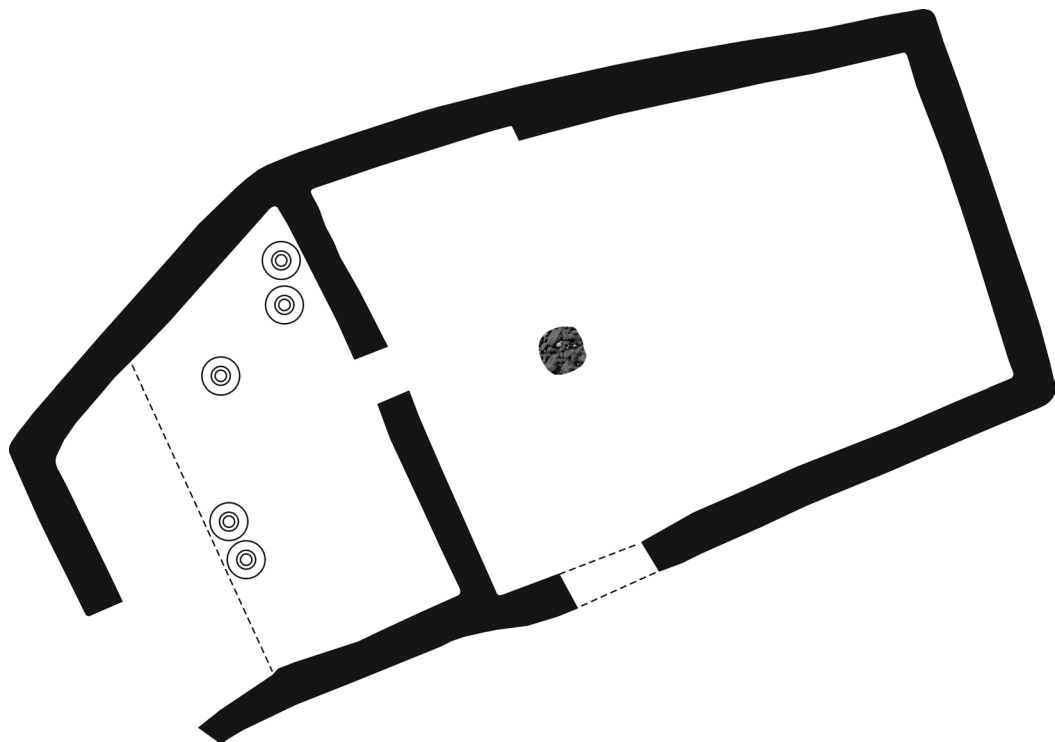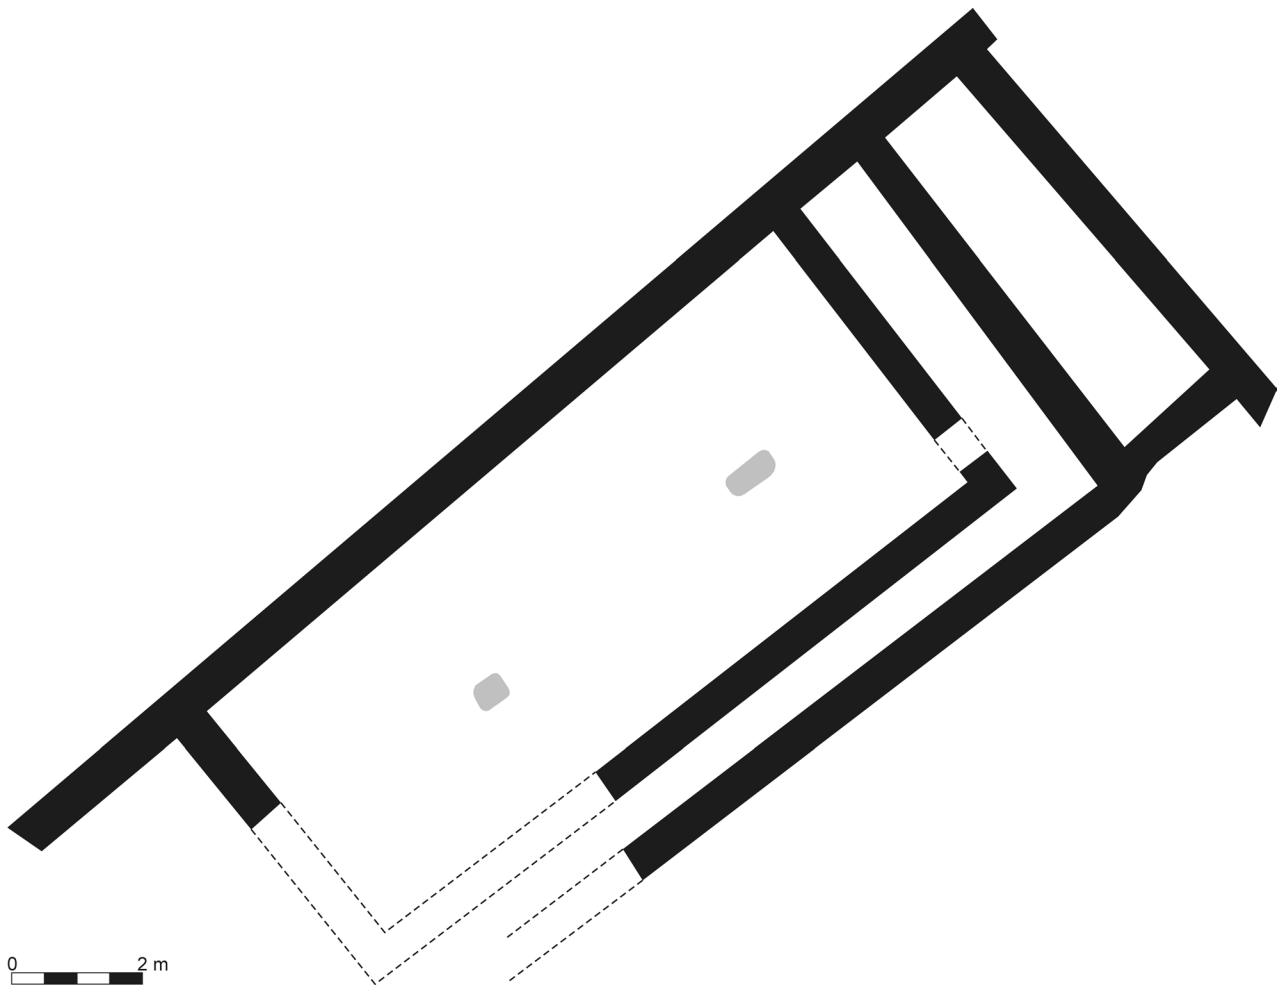

B18b Lianokladhi house 1 – added room	
Preservation	Well preserved
Desertion	Destroyed by fire.
Orientation	N–S
Lay-out	Rectangular, two rooms
Size	Ca. 23 m ² . (5.55 x 4.15 m) Room 3a: 5.55 x 1.75 m Room 3b: 5.55 x 2.05 m
Walls	Foundation made of larger stones, three stones thick, and one course high. Ca. 0.45 m wide.
Modifications	-
Floor	-
Furnishings	-
Finds	-
Activities	Storage?
Date	Found in the third stratum. MH II
References	Wace and Thompson 1909, 1912
Illustration	After Wace and Thompson 1912, figure 137



B19 Lianokladhi house 2	
Preservation	Unclear, but only partly excavated.
Desertion	Probably fire, as the four pithoi in the storeroom showed clear traces of fire.
Orientation	SE–NW, apse in the north-west.
Lay-out	Apsidal, at least two rooms. The entrance into the apse was located not in the centre of the partition wall, but towards the south-east. The north-western section of the partition wall curved inwards into the apse.
Size	Ca. 18 m ² excavated, but the house is larger. Room 1: 2.80 x 3.90 m Room 2: 4.00 x 4.50 m
Walls	South-western partition wall: ca. 0.50 m wide and 1.40 m long North-eastern partition wall: ca. 0.45 m wide and 1.80 m long.
Modifications	Three thin layers of clay were identified on the floor.
Floor	Stamped earth and a thin layer of clay.
Furnishings	Hearth next to the partition wall seemingly in the corner of the room, and on a much higher level than the floor. The earth walls of the hearth were strengthened with coarse ware sherds and around were remains of ashes. Three stone constructions were located in the apse, these were perhaps used as buttresses for the wall.
Finds	Remains of four pithoi in the apse. Storage jar filled with animal and botanical remains. Fragments of Matt Painted, Grey Minyan and Glazed ware
Activities	Storage, and presumably all other domestic activities.
Date	Found in the third stratum. MH II
References	Ioannidou 1973
Illustration	Ioannidou 1973, figure 1

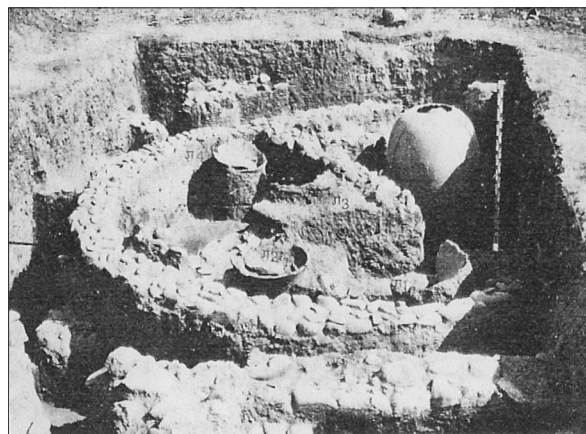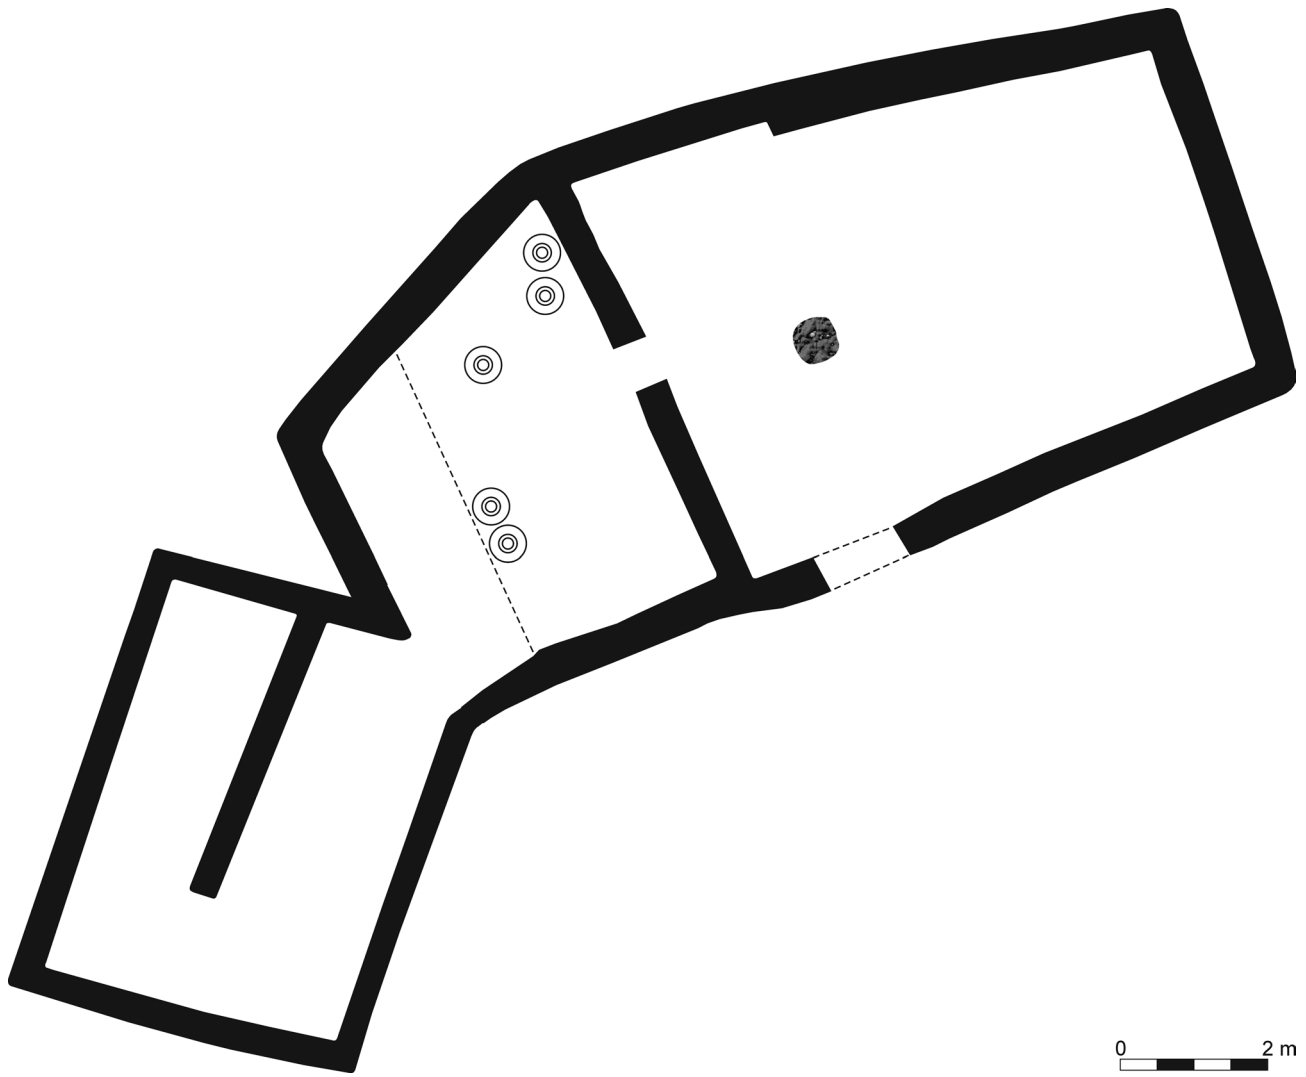

Catalogue C Boeotia



Co1 Drosia	
Preservation	The house seems well preserved, but was only excavated for a section.
Desertion	Destroyed by a fire.
Orientation	SE–NW. Apsidal attachment is of a NE–SW alignment.
Lay-out	Unclear, but to the side an apsidal (auxiliary?) structure was attached.
Size	19+ m ² uncovered
Walls	Main building: large stones on the outside, with some smaller stones at the inner side. Apsidal structure: irregular laid stones of different sizes.
Modifications	-
Floor	Made of clay, small pebbles and stones.
Furnishings	-
Finds	Pedestalled Minyan goblets, pattern painted Matt Painted ceramics, Polychrome ceramics.
Activities	All household activities?
Date	Presumably MH III because of the pedestalled goblets and polychrome ceramics.
References	Touloupa 1978; Sapouna-Sakellarakis 1989
Illustration	After Touloupa 1978, figure 1

Co2 Eutresis house under H	
Preservation	Moderately preserved as some sections were destroyed.
Desertion	Seemingly rebuilt as house H.
Orientation	E–W, with the entrance in the east.
Lay-out	Rectangular, two or three rooms.
Size	
Walls	-
Modifications	-
Floor	Floor layer was identified but not described.
Furnishings	Lower floor: ash pit, 0.35 x 0.45 x 0.09 m, perhaps used as hearth. However, it is unclear where this was located.
Finds	-
Activities	Presumably all household activities.
Date	EH III
References	Goldman 1931
Illustration	After Goldman 1931, Plan IIA

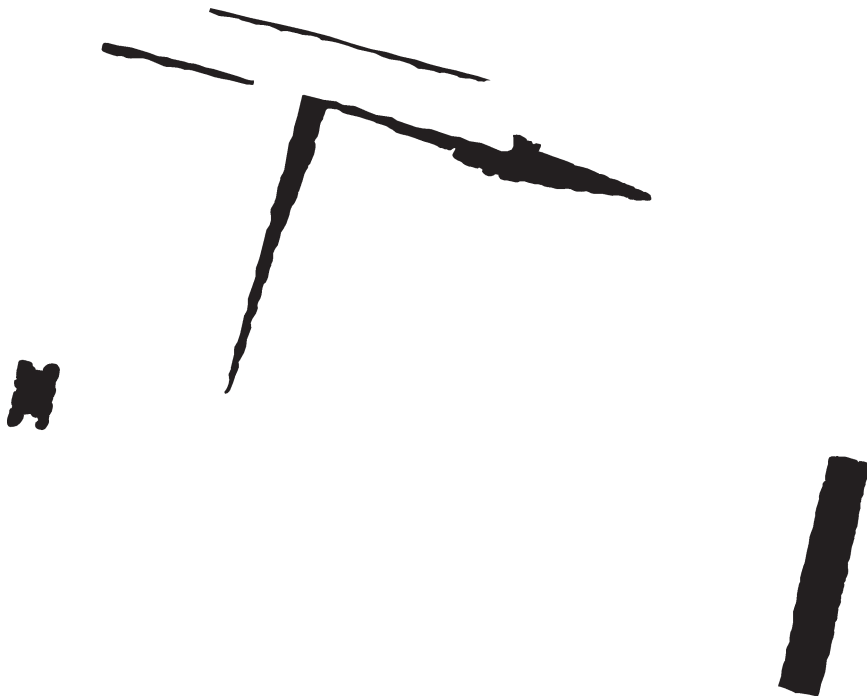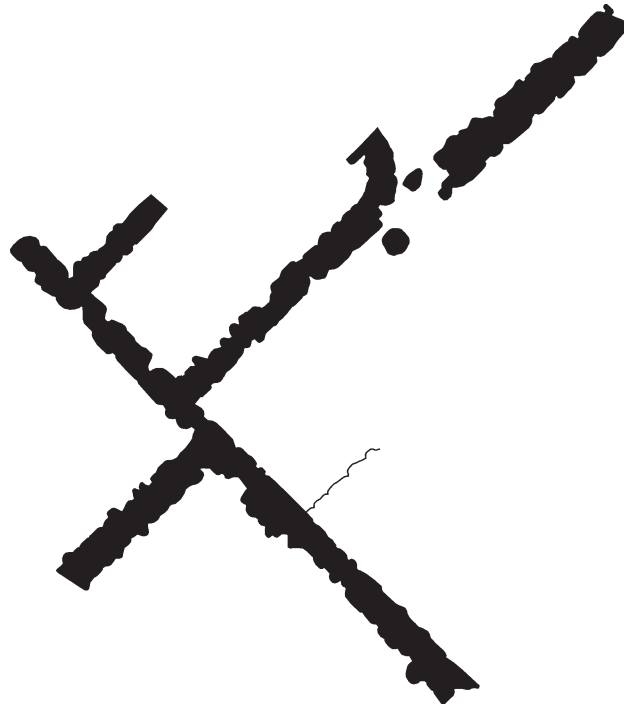



Co3 Eutresis house H	
Preservation	Moderately preserved as some sections were destroyed.
Desertion	Destroyed by fire. Eventually overbuilt in late MH–LH I.
Orientation	E–W, with the entrance in the east.
Lay-out	Rectangular, two rooms. In front was a porch paved with pebbles and potsherds, embedded in stamped earth. Two steps, made of stones and stamped earth, led down into the house.
Size	Ca. 72 m ² Main room ca. 6.00 x 10.00 m Back room 5.80 x 2.00 m
Walls	The outer walls were of a heavy construction. The inner face and upper courses were made of small stones embedded in clay, and the outer of much larger and heavier stones. Width of the walls averaged 0.60–0.70 m.
Modifications	It seems that the northern wall was modified. It was raised from 0.25 to 0.35 m in heights, by a wall of large stones. One course was laid in two rows and did not follow the configuration of the lower walls very closely at all points. The southern wall and the southern end of the east wall were also modified, but here the new walls entirely replaced the walls of the first construction phase. A floor was only associated with the first construction phase.
Floor	Floor identified but not described. It was lower than the street / court.
Furnishings	Main room: ash pit in the south-eastern corner. A hearth along the wall, and a brick central column, ca. 0.40 m high. A depression at the entrance might have functioned as a pivot hole for the door. The walls were plastered with mud.
Finds	Two bowls, two jars, four jugs, and a tankard were recovered between the hearth and the column. One pithos was standing against the north wall of the room and one to the west of the hearth.
Activities	Presumably all household activities.
Date	EH III
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 17

Co4a Eutresis house A1 (phase 1a)	
Preservation	Badly preserved
Desertion	Modified into, or succeeded by house A in the next phase.
Orientation	Roughly E–W. Entrance in the east.
Lay-out	Rectangular, at least two rooms and a porch.
Size	The reconstructed part is ca. 41.15 m ² (4.5 m wide).
Walls	-
Modifications	Modified into, or succeeded by house A in the next phase. In the plan published by Goldman, two wall stubs were visible in the entrance room. Philippa-Touchais ascribes these to an earlier phase of house A. While during the next phase, the entrance room was expanded towards the east.
Floor	-
Furnishings	-
Finds	-
Activities	-
Date	MH II (early)
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 42 and Philippa-Touchais 2010, figure 5

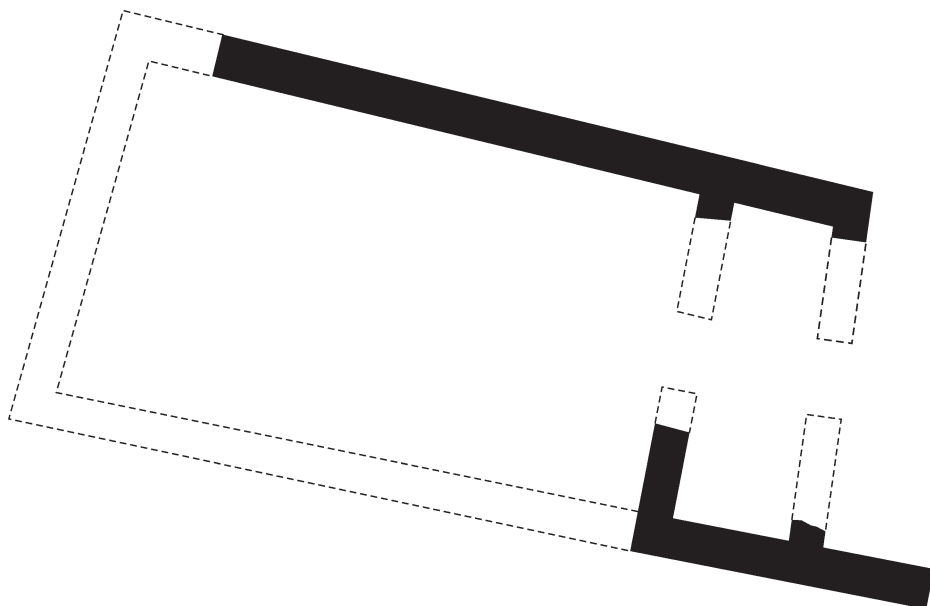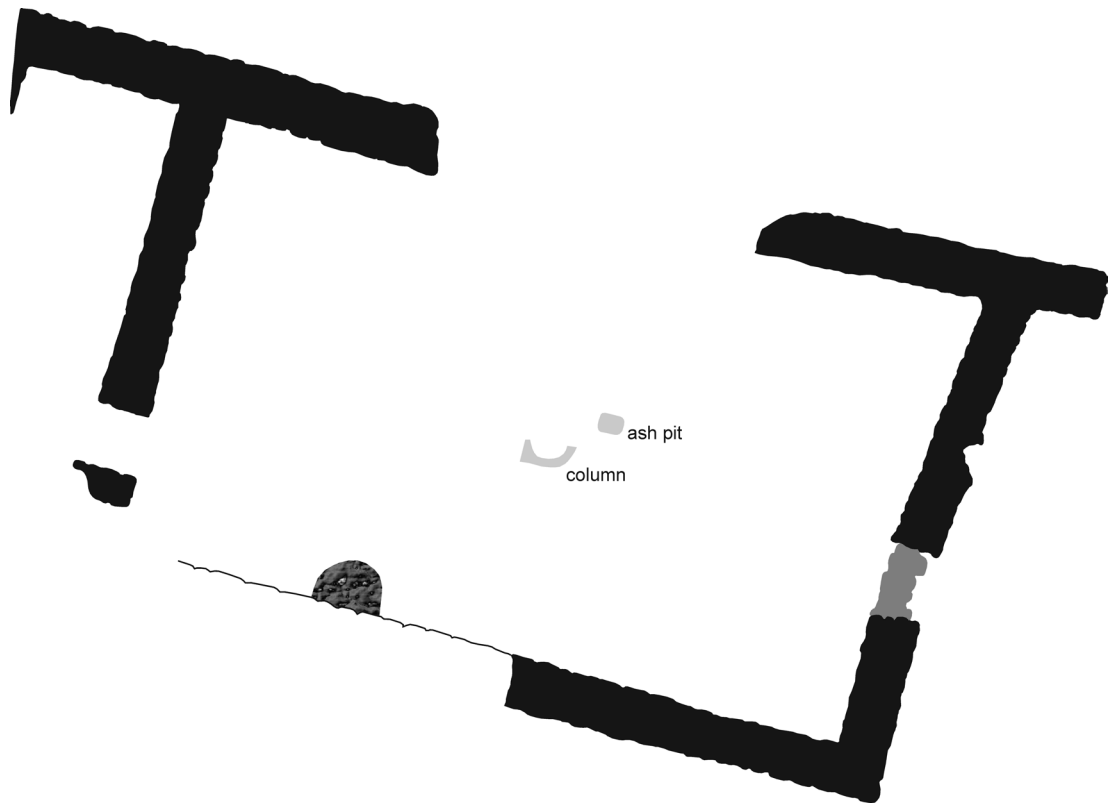



Co4b Eutresis house A (phase 1b-2a)	
Preservation	Well preserved, only sections of the east wall and south-west corner were missing.
Desertion	Presumably deserted.
Orientation	Roughly E–W. Entrance in the east.
Lay-out	Rectangular, two rooms.
Size	Ca. 48 m ² Entrance room 4.50 x 2.90 m Main room 4.50 x 7.65 m
Walls	Walls were on average 0.45 m wide.
Modifications	-
Floor	-
Furnishings	Entrance room: a possible oven, which was cut by one of the graves and perhaps therefore could not be identified by me in the published plan. Main room: a central hearth. A platform (1.50 x 0.88 m) made of mixed clay and sherds, and surrounded by stones, was placed along the south wall, and might have been an oven. A stone (lined) platform (2.50 x 0.40 m) along the south wall. Attached to the partition wall was a rectangular stone structure, perhaps used for support of a vessel or platform. The two corners in the back of the house were partitioned / constructed into triangular bases.
Finds	A large quantity of ceramics was found in the house, showing different varieties characteristic of the early MH. Mentioned were an early Yellow Minyan stem and part of a goblet. Entrance room: a good deal of domestic pottery, some querns and a pithos.
Activities	Probably all domestic activities.
Date	MH II (late)–MH III (early)
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 42

Co5 Eutresis structure AA (phase 2b)	
Preservation	Badly preserved.
Desertion	Destroyed by fire towards the end of the phase.
Orientation	NW–SE
Lay-out	Rectangular / Irregular, one and possibly two rooms.
Size	The excavated section was ca. 6 m ² (room 2: 3.00 x 2.00 m)
Walls	Walls were less than 0.40 m wide.
Modifications	-
Floor	-
Furnishings	-
Finds	Tiny thread of gold. Burned Matt Painted pithos in the north-western corner of room 1.
Activities	Storage (pithos), possibly specialized function, because of small size (width).
Date	MH III (late)
References	Goldman 1931
Illustration	After Goldman 1931, figure 61

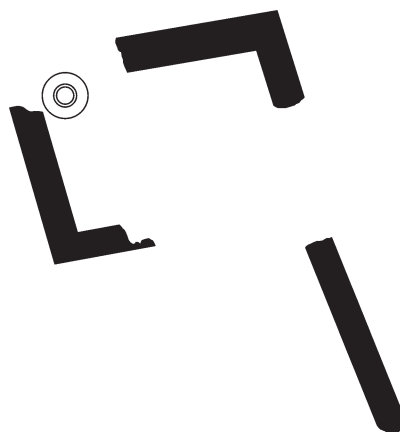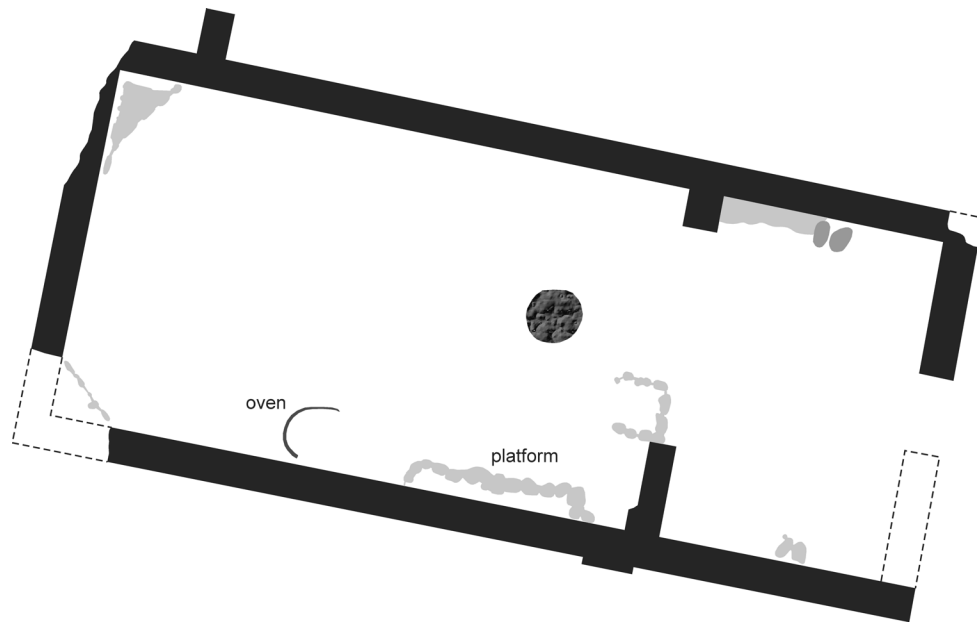



Co6a Eutresis house C1 (phase 1a)	
Preservation	Well preserved
Desertion	The house was modified or (partly) rebuilt during the next phase.
Orientation	NW–SE. Apse was located in the south-east. Entrance was in the north-west.
Lay-out	Apsidal, two rooms and a court.
Size	Ca. 13.45 m ² (2.8 m wide) Main room 3.30 x 2.80 m Apse measured 2.20 m at its widest.
Walls	-
Modifications	The house was modified or (partly) rebuilt during the next phase. Goldman mentions that the external walls were double. However, we might also be dealing with a modification or rebuilding of the house. The displacement of the apse, and an additional partition wall also suggests a later modification. Philippa-Touchais therefore discerned two architectural phases of house C.
Floor	-
Furnishings	Court: pithos, stabilized with mud brick, clay and stone Main room: circular central clay hearth
Finds	Pithos in situ in the court
Activities	Presumably all domestic activities
Date	MH II (early)
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 37

Co6b Eutresis house C (phase 1b-2a)	
Preservation	Good, only the south-eastern part of the apse is missing.
Desertion	Presumably deserted.
Orientation	NW–SE. Apse was located in the south-east. Entrance was in the north-west.
Lay-out	Apsidal, three rooms and a court.
Size	The excavated section was ca. ca. 15 m ²
Walls	-
Modifications	The new partition wall cut the central hearth. As such, it is assumed that the hearth was not used anymore.
Floor	-
Furnishings	Court: pithos, stabilized with mud brick, clay, and stone. Some stone settings in the court could also have had a function, but were not mentioned in the publication. Apse: pit (0.70 m deep) in the corner, framed by small stones, containing pure wood ash.
Finds	Pithos, large number Minyan pedestalled goblets, Matt Painted pottery, pithos sherds. Above the floor remains of a MH II or MH III type pithos were recovered.
Activities	Probably all domestic activities, definitely storage (pithoi), eating / drinking (pedestalled goblets).
Date	MH II (late)–MH III (early)
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 37

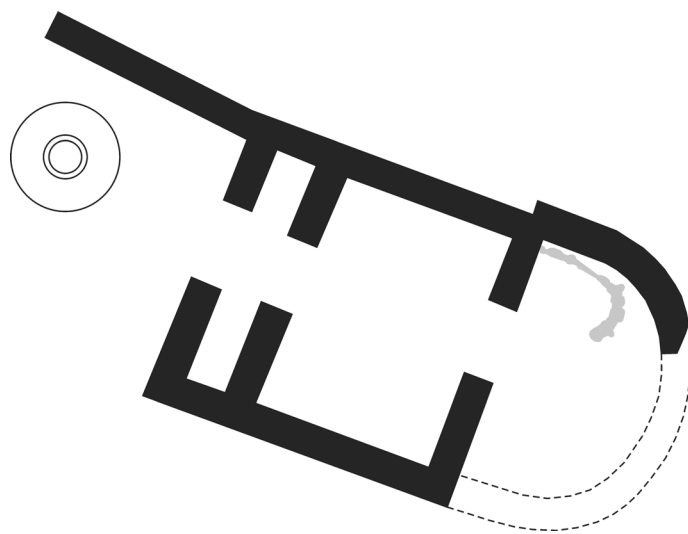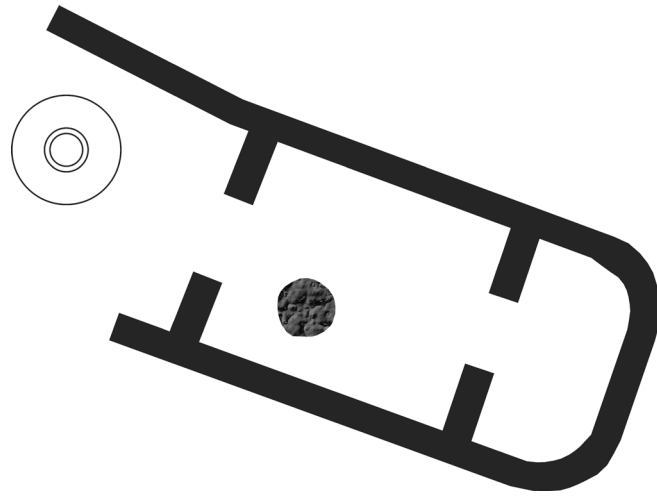



Co7 Eutresis house D1 (phase 1a-2a)	
Preservation	Seemingly well preserved, but partly excavated, as it was located beneath house D2.
Desertion	Remained in use during subsequent phase(s). Apparently deserted. A full meter was located between this house, and the eventual successor house D.
Orientation	NW–SE. Entrance presumably in the north-west.
Lay-out	Rectangular, probably two rooms, a porch and a paved front area.
Size	The reconstruction suggests an overall size of ca. 28.05 m ² (3.9 m wide).
Walls	-
Modifications	-
Floor	-
Furnishings	-
Finds	Three pithoi along the court wall
Activities	Presumably all domestic activities
Date	MH II (early)–MH II (late)
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 63 and Philippa-Touchais 2010, figure 5

Co8 Eutresis house D (phase 3)	
Preservation	Reasonably, only part of the western section was missing, due to a Byzantine intrusion.
Desertion	Deserted?
Orientation	NW–SE. The entrance was located in the north-west.
Lay-out	Rectangular, two or three rooms, and a cobbled pavement in front of the house.
Size	The reconstructed house was ca. 37 m ² (4.6 m wide)
Walls	The house was one of the best built houses found at Eutresis. The walls met at almost perfect angles, and had an even width of 0.50 m.
Modifications	The eastern end of the house consisted of a room (called alley by the excavator), which was seemingly accessible from the north, as well as the south. A double wall suggests a possible expansion of this room.
Floor	Clay dressed floor, which had almost disappeared.
Furnishings	A rectangular pavement of stones was located in the easternmost room (called alley by the excavator).
Finds	Most of the pottery was non-descript ware and coarse ware. However, also fine monochrome and polychrome Yellow Minyan were recovered. Overall, the pottery was worn, indicating exposure for some time.
Activities	Probably all domestic activities, definitely eating / drinking (fine ware and Minyan ware).
Date	MH III–LH I
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 63

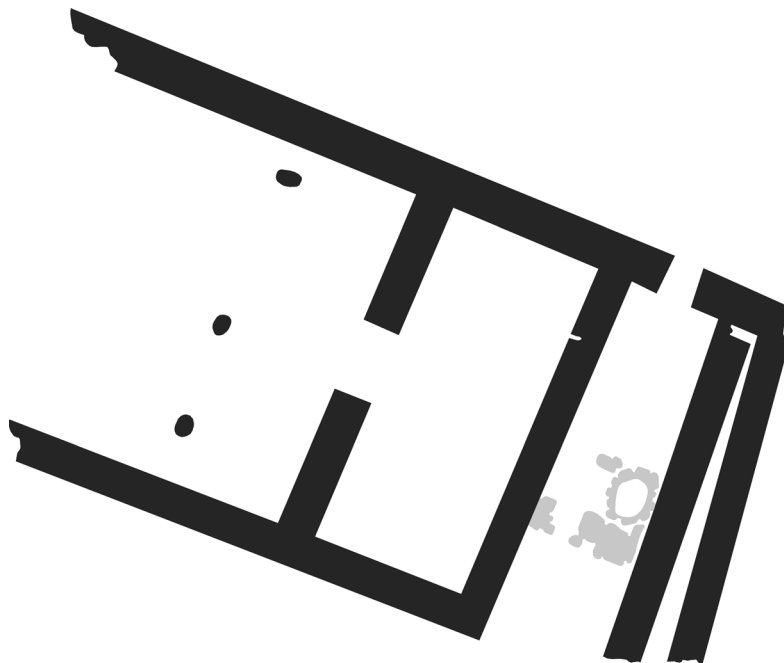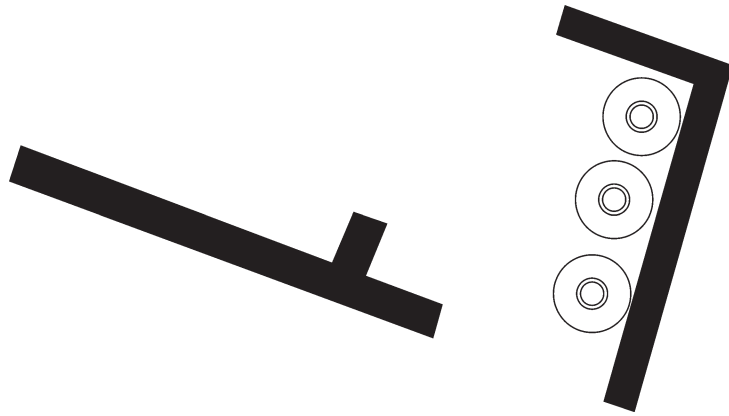



C09 Eutresis house E (phase 2a-2b)	
Preservation	Badly preserved, only some connecting walls and the entrance.
Desertion	Also used in the next phase. Eventually destroyed by fire.
Orientation	N–S, 0.85 wide entrance in the north into room 2, and in the east into room 1.
Lay-out	Rectangular? Possibly two or three rooms.
Size	The excavated section is ca. 30 m ² (4.5 m wide). Room 1, 3.90 x 4.60 m Room 2, 1.60–2.00 x 4.50 m
Walls	Ca. 0.40–0.45 wide.
Modifications	The change in direction of the east and west walls, coincides with a difference in the stone works, so they were probably not built at the same time. The northern section is probably the older part, ascribed by Philippa-Touchais to phase 2a, while the southern expansion was ascribed to phase 2b. The small side room probably also dates to phase 2b, as it partly obstructs the threshold at the entrance into room 1. The threshold leading into the paved court was first made of two rows of small stones with a space left between which either once held a wooden threshold block or beaten earth. Later it was filled with flat stones.
Floor	-
Furnishings	The front of the eastern entrance was paved with pebbles and potsherds. The threshold was made of a large stone. Room 1: posthole in the centre. Charred circles were seen on the corner stones of the south wall. These were interpreted as upright posts.
Finds	Little good pottery, set of pierced boar's tusks, large number of bone punchers, some bits of shaped mother-of-pearl, partially shaped bones, a fragmentary example of a terracotta fire box, a chisel, a bone knuckle together with some pins with ornamental head.
Activities	Probably all domestic activities, definitely household production of tools, and possibly utilities such as pins and boxes.
Date	MH III
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 57

C10 Eutresis house F (phase 2a)	
Preservation	Moderately, the south-western section of the house was not excavated.
Desertion	Destroyed by fire.
Orientation	NW–SE. Several entrances into different rooms were identified.
Lay-out	Rectangular-like, at least two rooms.
Size	The uncovered section measured ca. 28 m ² (2.95 m wide).
Walls	The west wall of room 1 was very narrow, 0.35 m, while the walls of room 1 were also quite low, rising 0.10–0.12 m above floor level. Part of the wall between rooms 1 and 2 was (partly?) made of two courses of mud brick. The wall at room 3 was very wide, 0.61 m, and seems to have been strengthened with a second row of stones.
Modifications	The side walls of room 1 might have been extended / shortened over time. The wall at room 3 seems to have been strengthened with a second row of stones.
Floor	-
Furnishings	Outside: pebble paving, the entrance into room 3 was also paved with stones. Room 1: six small mud brick bins. They were bedded on a layer of clay, containing stones, sherds and bone fragments. The walls were very thin, but the sides were surrounded by clay and stones. They measured ca. 0.50–0.60 m in length, and 0.25–0.30 m in height. As none of the structures were fire blackened, it seems most plausible that they were used for storage of cereal. Room 2: one large bin with stone paving around it perhaps for support. Room 3: hearth
Finds	Outside: a pithos was placed against the house. Inside: remains of carbonized weeds and peas. Room 3, in the hearth: two blackened stones (querns?) and a piece of tile.
Activities	Probably all domestic activities, definitely storage (bins, pithoi, cereals)
Date	MH III (early)
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 45

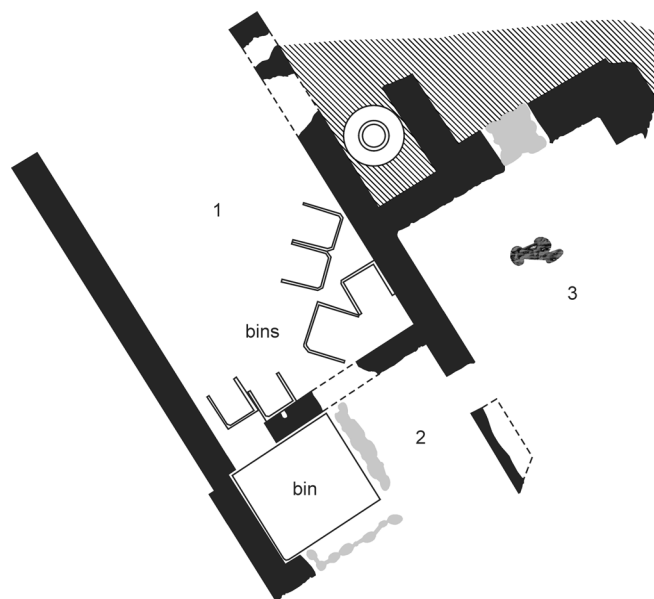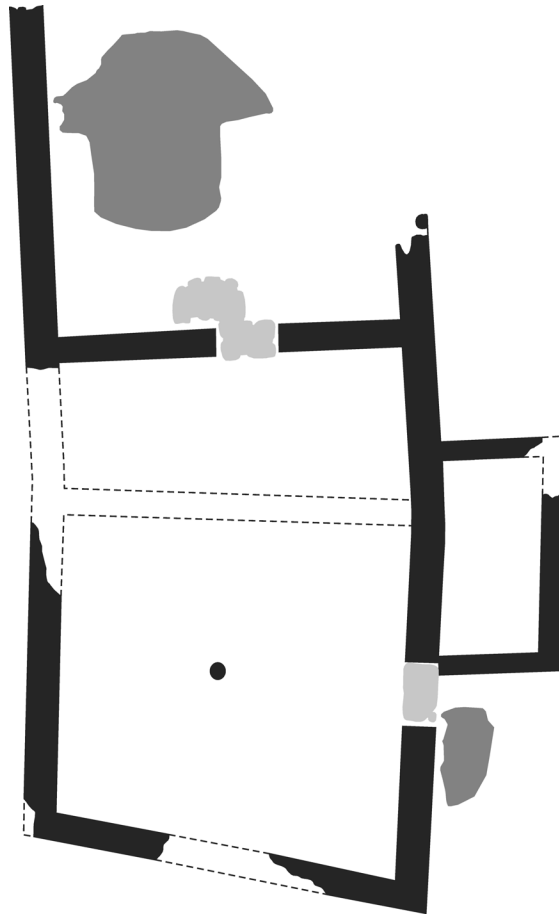



C11 Eutresis structure GQ (phase 1b-2a)	
Preservation	Moderately preserved, but hard to understand the life biography.
Desertion	Presumably deserted
Orientation	E–W, several entrances
Lay-out	Irregular-rectangular, at least five partitioned areas. G1 and G2 were entered through a 70 cm wide entrance. G3 was entered through a 1.00 m wide doorway.
Size	Ca. 23 m ² was uncovered / preserved.
Walls	The walls were in poorer construction than the other house walls, and were frequently adapted to the shape of the internal furnishings. The walls varied also in thickness.
Modifications	Some of the ovens seem to have been constructed later, as they were built on top of one of the walls, as also indicated on the plan. Q seems to have been an extension of G, as it partly overbuilt the paved area which was aligned with the south wall of room G3. The south-eastern corner of Q1 might have been an entrance that was later blocked. The construction of the curved wall for support of a pithos was ascribed to phase 2a. Some other walls might have been added / modified as well, see plans.
Floor	-
Furnishings	G1: two ovens, one bin G3: three ovens Q1: two in situ pithoi
Finds	G1: a coarse large jar with carbonized peas, also peas on the floor, fragment of an axe head, some querns, bone implements, burnt fragment of a Yellow Minyan Cycladic type of jug with backward neck G2: some querns, a mass of coarse household pottery including large pithoi, and exceedingly small heavy walled pots, which looked like crucibles. G3: much coarse household pottery Q1: two in situ pithoi, grinders, querns, an accumulation of charred matter in the centre could be a hearth or refuse from the ovens, a handle for a knife/staff made out of horn.
Activities	Definitely storage (pithoi and explicit mentioning of heavy walled vessels and masses of coarse ware). Eating/ drinking are not likely considering the absence of fine ware, but food preparation is the more likely considering the number of ovens. Possibly specialized structure for cooking / processing of food
Date	MH II (late)–MH III (early)
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 48

C12 Eutresis house J (phase 2a)	
Preservation	Moderately preserved: the north-western section of the house was missing. In addition, it was unclear if some pieces of wall were missing, or were actually entrances.
Desertion	Presumably deserted.
Orientation	NW–SE
Lay-out	Rectangular, at least two rooms, possibly three. A 1.00 m wide entrance led from room 1 into room 2. Another entrance into room 1 might have been located west.
Size	The excavated section was ca. 10 m ² (3.05 m wide) Room 1: 3.30 x 1.70 m Room 2: 3.00 x 1.50 m
Walls	-
Modifications	-
Floor	-
Furnishings	A hearth, marked by two fire blackened stones. A bread oven seems connected to the house.
Finds	A small quantity of broken pottery
Activities	Probably all domestic activities, perhaps specialized function for baking bread (oven).
Date	MH III (early)
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 51

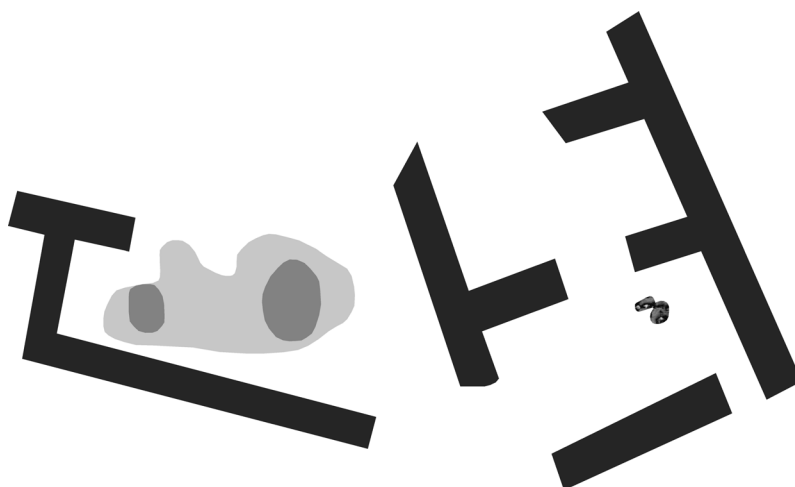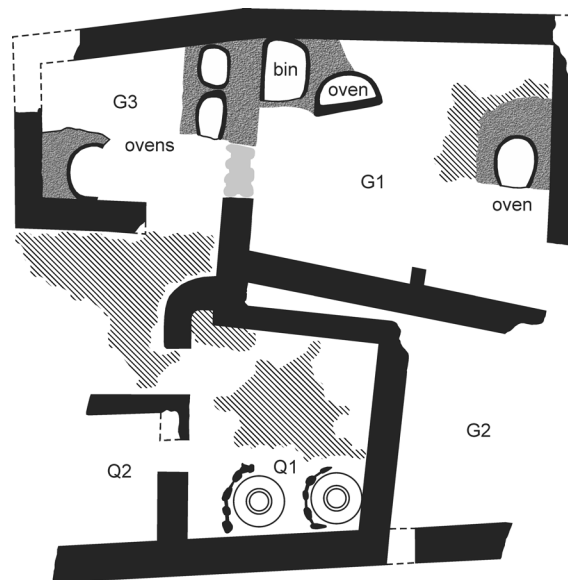



C13a Eutresis house M1 (phase 1b)	
Preservation	Well preserved. A section of the north-eastern corner was not uncovered.
Desertion	Modified during the next phase.
Orientation	E–W, entrance of 1.80 m wide in the south.
Lay-out	Rectangular, three rooms. The entrance into the east room was 0.60 m, and into the west room 0.50 m.
Size	The house measured ca. 20 m ² (3.3 m wide) Central room 3.20 x 3.30 m East room 3.20 x 1.30 m West room 3.20 x 1.40 m
Walls	-
Modifications	The easternmost room and the main room were combined, and the eastern wall was displaced towards the south-west, see below.
Floor	-
Furnishings	Hearth in the main room, towards the north-west corner. West room: the entrance was paved with a flat stones block.
Finds	East room: pithos Main room: pounders and grinders around the hearth, and some good Matt painted ware and the usual quantity of Grey Minyan ware were found on the floor.
Activities	Probably all domestic activities
Date	MH II (late)
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 45 and Philippa-Touchais 2010, figure 6

C13b Eutresis house M (phase 2a)	
Preservation	Well preserved. A section of the north-eastern corner was not uncovered.
Desertion	
Orientation	E–W, entrance in the south
Lay-out	Rectangular, but the eastern wall is set askew.
Size	The excavated section is ca. 20 m ² (3.3 m wide)
Walls	-
Floor	-
Furnishings	A hearth in the north-eastern corner
Modifications	-
Finds	-
Activities	-
Date	MH III (early)
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 45 and Philippa-Touchais 2010, figure 7

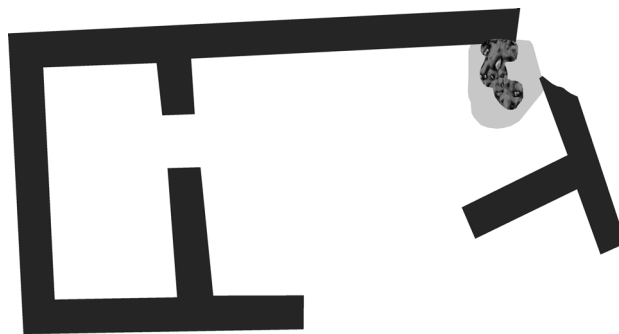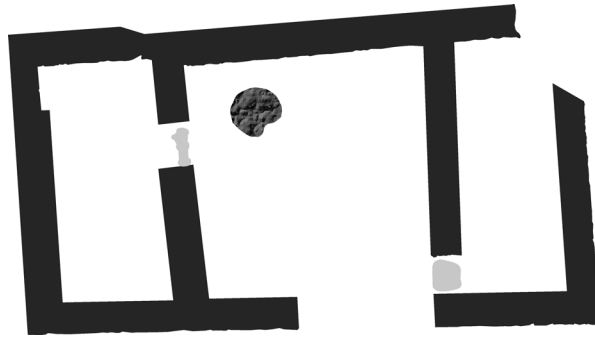



C14 Eutresis house P (phase 1b-3)	
Preservation	Reasonably preserved. The north-western section was not excavated,
Desertion	Presumably deserted.
Orientation	E–W, entrance in the east
Lay-out	Rectangular, at least one to two rooms. A mass of fallen brick half way the room, and at the same position as where the south wall changes direction, indicates the existence of a partition wall. A 0.90 wide entrance led from the east into the main room. A second entrance, 0.60 wide, led from the north into the main room.
Size	The excavated section was ca. 38 m ² Front room 1: 3.70 x 5.60 m Back room 2: 3.70 x 4.60 m Paved court / street: 3.50 x 3.80 m
Walls	South wall ca. 0.45 m wide in the fore court, and ca. 0.60 m wide in the back. North wall ca. 0.50 m wide.
Modifications	Frequent renewal of the clay dressing of the floor / at least three superimposed floors were identified, separated by 0.10–0.20 m thick layers of earth. Phillippa-Touchais (2006) reconstructed a one-roomed house P for phase 1b, which was extended in the west with a second room during phase 2a.
Floor	Clay dressed floors
Furnishings	Traces of paving were found in front and north of the house. Front room 1: hearth, indicated by a foundation of cobblestones, covered with charred matter and a number of coarse household pots. Back room 2: possible hearth, indicated by a charred spot, backed by a large stone.
Finds	Front room 1: querns, grinders, coarse vessels, a good deal of pottery, mainly Yellow Minyan, including basins, water jars, and a goblet or bowl
Activities	Eating/drinking (goblet, bowl, jar), processing of food (querns, grinder)
Date	MH II (late)–MH III–LH I.
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 55

C15 Eutresis house R (phase 1b-2a)	
Preservation	Moderately, the central (?) room was preserved, but the eastern and western section were not excavated.
Desertion	Presumably deserted?
Orientation	E–W. Entrance was located in the north.
Lay-out	Rectangular, possibly three rooms
Size	The excavated section was ca. 13 m ² (3.1 m wide)
Walls	The partition walls were very narrow.
Modifications	-
Floor	-
Furnishings	Main room: two ovens. Possibly a hearth (or burnt remains from the ovens), but these were not indicated in the published plan.
Finds	Unclear
Activities	Probably all domestic activities, definitely food preparation (2 ovens and possible hearth).
Date	MH II (late)–MH III (early)
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 48

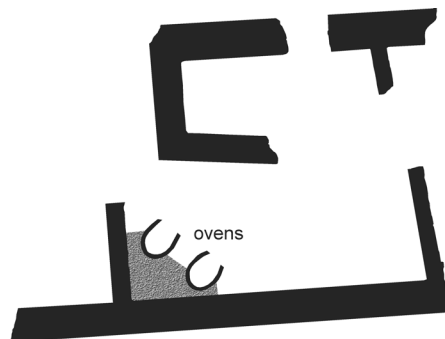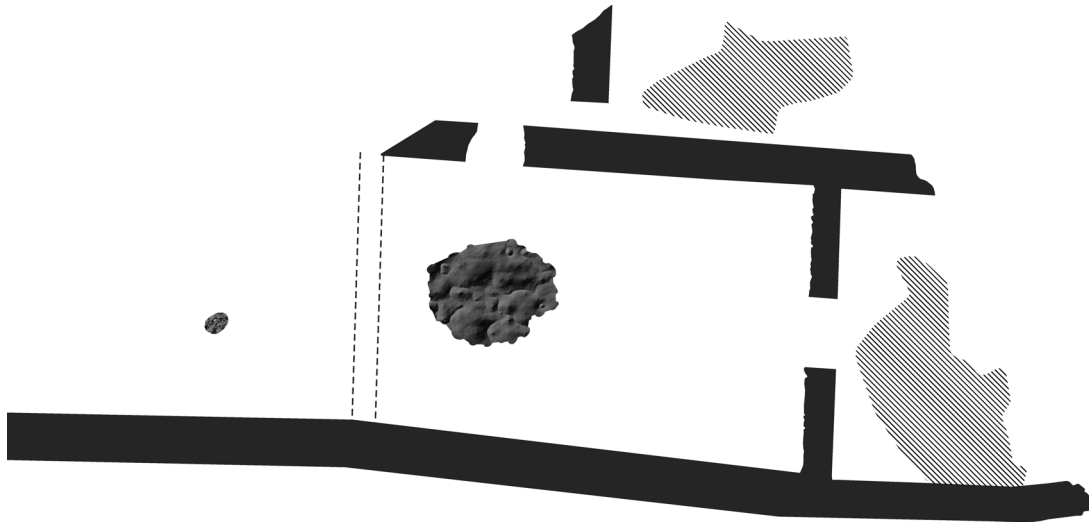



C16 Eutresis house S (phase 1a-1b)	
Preservation	Well preserved, except for the western section.
Desertion	Eventually overbuilt by house J. Presumably after desertion.
Orientation	E–W, front was located in the east.
Lay-out	Rectangular, two rooms and a paved front area / street.
Size	The excavated part was ca. 56 m ² (at least 11.60 x 5.00 m wide), which might actually be the total size of the house, as the western end of the southern wall was evenly finished. The width of the house was known, but not the exact length. Front room was 5.00 x 5.50 m.
Walls	Ca. 0.45 m wide.
Modifications	-
Floor	-
Furnishings	Hearth. Three stones along the width of the room in the centre probably indicated the location of a partition wall of organic material. Outside the house and not illustrated in the plan: some stones and paving in the front of the house were perhaps used for the support of a gabled roof. A semi-circular hearth, demarcated by stones and sherds, in front of the house might have belonged to it. It was level with the outer walls, and raised 0.30 m above the level of the court. The diameter was almost 2.00 m and the depth 0.9 m.
Finds	Pottery of excellent quality, Matt Painted pithoi fragments, Grey Minyan ceramics, a bronze knife and two Cycladic pyxis covers.
Activities	Probably all domestic activities, definitely storage (pithoi, pyxis lids), drinking / eating (Grey Minyan ceramics, pottery of excellent quality).
Date	MH II (early)–MH II (late)
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 53

C17 Eutresis structure U (phase 2b)	
Preservation	Badly preserved, as only a few walls were recovered. The eastern section was not uncovered / overbuilt by a Mediaeval tower.
Desertion	Destroyed by fire towards the end of the phase.
Orientation	N–S. 2.8 m wide entrance in the west.
Lay-out	Irregular, at least two rooms
Size	The excavated section is ca. 11 m ² (2.7 m wide)
Walls	-
Modifications	-
Floor	-
Furnishings	-
Finds	Matt Painted pithos
Activities	Storage (pithos)
Date	MH III (late)
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 62

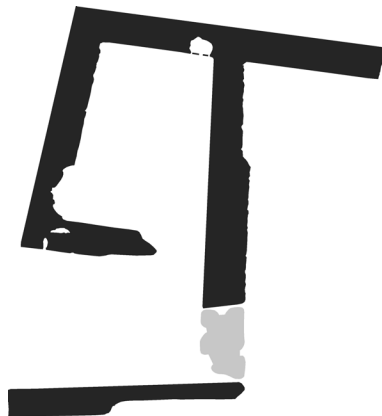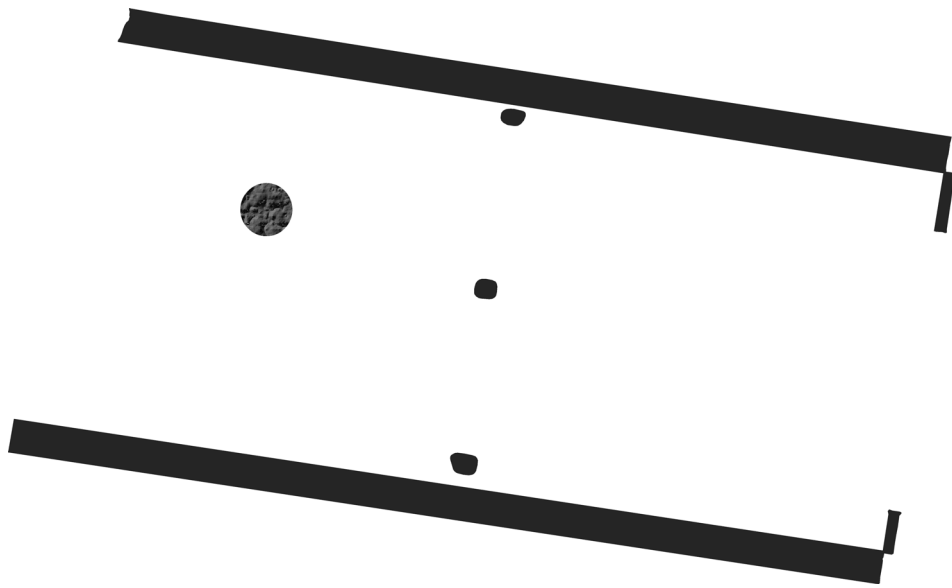

C18 Eutresis structure W (phase 2b)	
Preservation	Badly preserved, the eastern section of the structure was missing, and the southern section was ruined by Byzantine intrusions.
Desertion	Presumably deserted?
Orientation	E–W
Lay-out	Rectangular, at least two room
Size	The excavated section is ca. 4 m ² Room 2: ca. 2.00 x 2.10 m
Walls	-
Modifications	-
Floor	-
Furnishings	Room 2: a small stone platform in the north-western corner
Finds	-
Activities	Unclear, possibly specialized function, because of small size (width)
Date	MH III (late)
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 59




C19 Eutresis house X (phase 1a-1b)	
Preservation	Seemingly well preserved, but only partly excavated.
Desertion	Remained in use during subsequent phase. Presumably deserted.
Orientation	E–W. Apse was located in the west.
Lay-out	Apsidal, two rooms
Size	The excavated section was ca. 11 m ² Main room 3.00 m wide Apse 2.15 m deep
Walls	Walls were made of rather small stones, laid in three courses, 0.45 wide. Wall of the apse may have been double, like at house C,
Modifications	-
Floor	-
Furnishings	Apse: Two pits / bothroi containing MH ceramics and carbonized matter. The pits were 0.43 and 0.60 deep, and both lined with clay. The entrance into the apse had a threshold of flat stones.
Finds	Two Cycladic jugs, a Cycladic type jar, and small Cycladic jar. Inside the pit were MH sherds and carbonized matter.
Activities	Probably all domestic activities, definitely storage/pouring (jugs)
Date	MH II (early)–MH II (late)
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 39

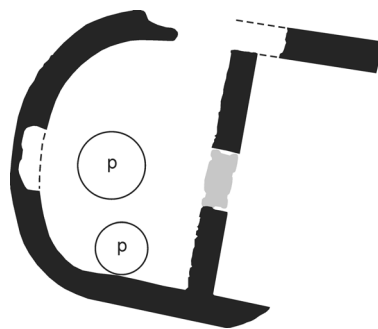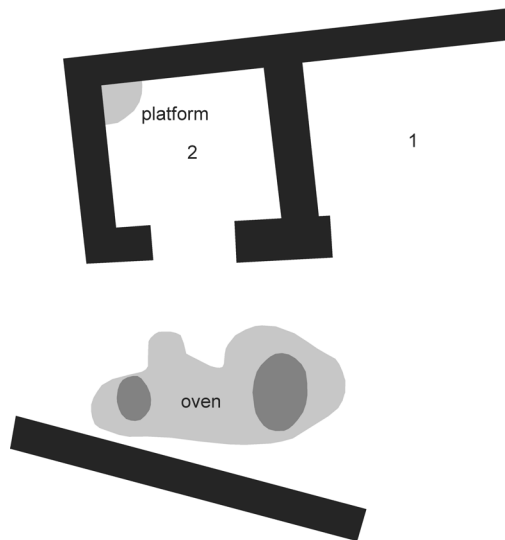

C20 Eutresis house XX (phase 2a)	
Preservation	Only a small rectangular section has been recovered
Desertion	Presumably deserted.
Orientation	NE–SW
Lay-out	Rectangular to trapezoidal, at least 1 room
Size	Ca. 15 m ² was uncovered (3.6 m wide and at least 4.00 m long)
Walls	-
Modifications	-
Floor	-
Furnishings	-
Finds	Two large pithoi, one in each corner.
Activities	Probably all domestic activities
Date	MH III (early)
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, plan IIB



C21 Eutresis house Y (phase 3)	
Preservation	Badly preserved, only the eastern section has been recovered. During excavations the house was not identified as such, but rather as a working area for the production of bricks.
Desertion	Presumably deserted
Orientation	E–W
Lay-out	Rectangular, at least one room
Size	The excavated section is ca. 20 m ² (4.5 m wide)
Walls	-
Modifications	-
Floor	-
Furnishings	Possibly two bins. One of the structures (B) was described: stone and clay foundation, ca. 1.00 x 1.00 m, the rim was ca. 0.20 m high and 0.10 m thick. Thin mud bricks were placed on the stone foundation.
Finds	-
Activities	If the two structures were indeed bins then definitely storage. Suggestion was made that mud bricks were produced with structure B.
Date	MH III/LH I–LH II
References	Goldman 1931; Philippa-Touchais 2006
Illustration	After Goldman 1931, figure 66

C22 Eutresis LH I–II house B (LH)	
Preservation	Good. The north-western corner was destroyed by later building activity.
Desertion	Presumably deserted.
Orientation	Roughly E–W or N–S. The entrance was presumably located in the south or west wall, where the bench did not run.
Lay-out	Rectangular to square
Size	Ca. 25 m ² . Ca. 5.00 by 5.00 m
Walls	-
Modifications	-
Floor	-
Features	Stone built bench along the north and east walls, ca. 0.60–0.70 m wide. A rectangular hearth was placed against the bench along the east wall.
Finds	Black monochrome pot, painted Yellow Minyan, LH I and II ceramics
Activities	Perhaps related to the cemetery.
Date	LH I–II
References	Goldman 1931
Illustration	After Goldman 1931, figure 73

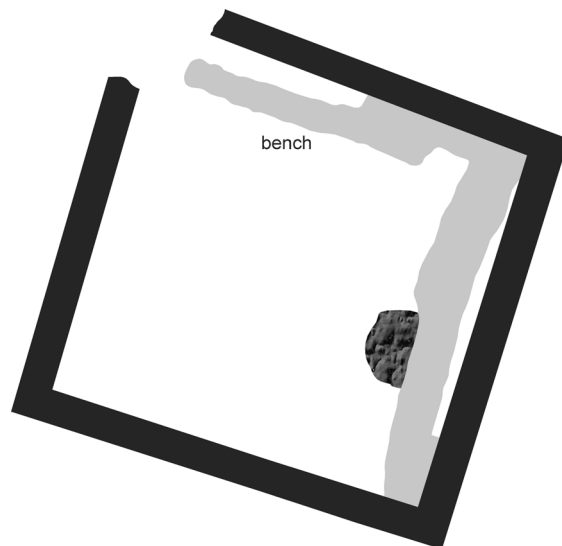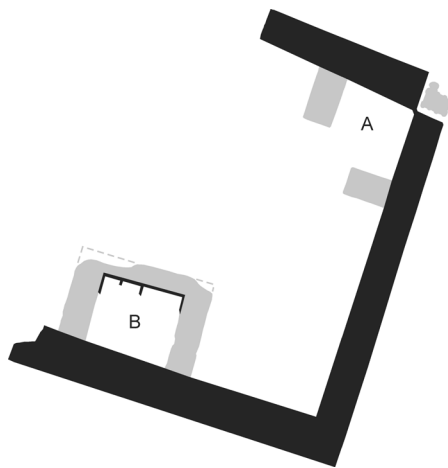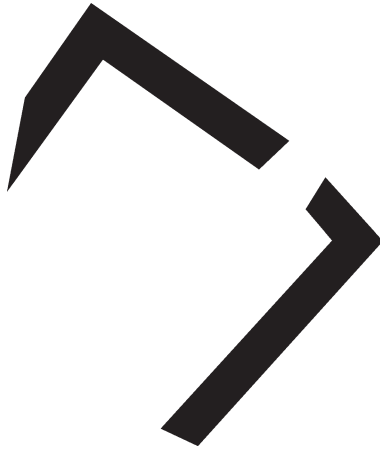


C23 Orchomenos house K	
Preservation	Badly preserved. Only part of the north-western section was uncovered. While the north-eastern section was eroded off the slope.
Desertion	Destroyed by a fire.
Orientation	NW–SE, with the entrance presumably in the south-east
Lay-out	Rectangular, at least two rooms
Size	35+ m ² (main room at least 4.00 x 5.65 m, back room 2.15 x 5.65 m)
Walls	Two rows of stones, with smaller stones in between.
Modifications	-
Floor	A layer of ash was found on the floor. The floor was not described.
Furnishings	A clay platform was located in the corner of the main room. This was presumably used as a working table or shelf, as vessels remains were found on top of it. Three small walls were constructed perpendicular to the wall, in the back room. They were made out of mud bricks placed on their side. In one of these created spaces (unclear to me which one) was a hearth.
Finds	Burned grains and wheat grains. Aeginetan Matt Painted pithos, carinated goblets with vertical and basket handles. Many Grey and Yellow Minyan ceramics, three Minyan pedestalled bowls, bowls with loop handles, and a Matt Painted jug. There must have been more vessels, but these are the only ones that can be ascribed to the house (Sarri 2010: 39-40).
Activities	Presumably all household activities
Date	MH II–III
References	Bulle 1907; Sarri 2010
Illustration	After Bulle 1907, figure 19 and Sarri 2010, plan 6


C24 Thebes Pindarou 13	
Preservation	Seemingly well preserved, but only partly uncovered.
Desertion	Presumably deserted?
Orientation	-
Lay-out	Probably rectangular, at least two rooms. Two narrow partitioning walls were built against the eastern wall.
Size	Perhaps at least 179.55 m ² , but the exact extent of the house is not clear.
Walls	Not described. But foundation trenches for the walls were cut in the bedrock.
Modifications	-
Floor	Clay floor
Furnishings	Eastern room: Rectangular hearth, three bothroi, and three postholes alongside an elongated cut. Western room: A bothros and two postholes. A feature of unclear use was located along the northern wall.
Finds	EH II and EH III ceramics
Activities	-
Date	EH II–EH III
References	Demakopoulou 1979
Illustration	After Demakopoulou 1979, figure 2

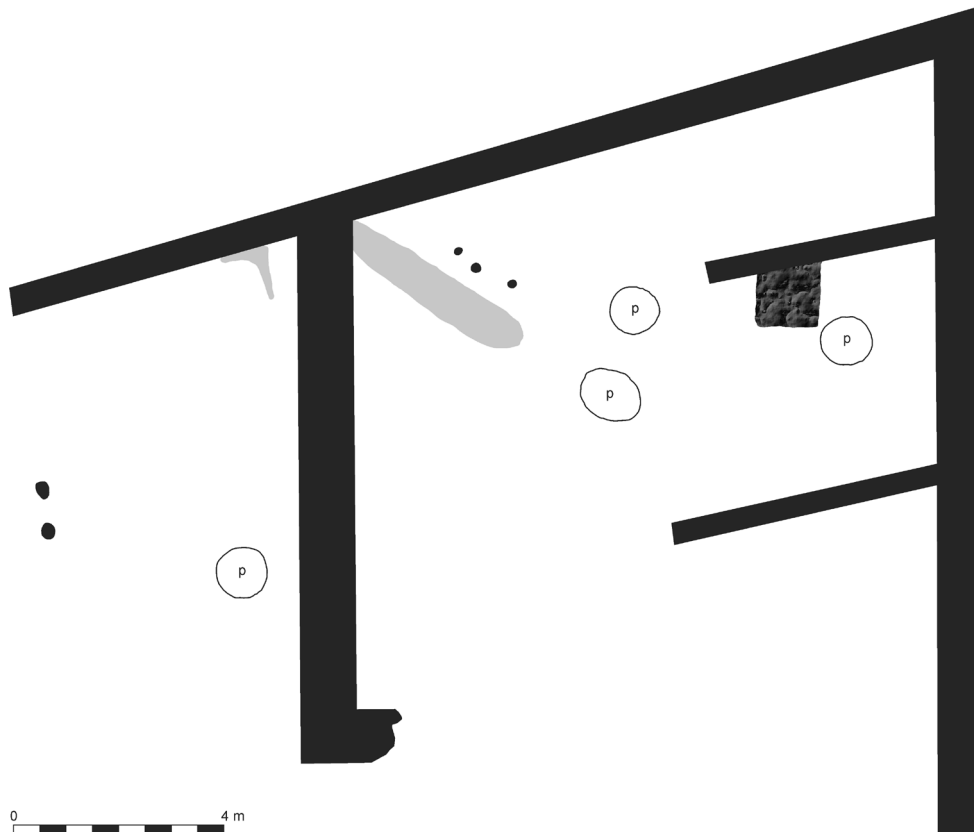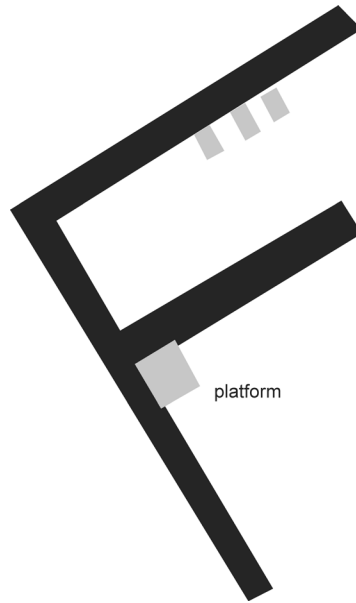

C25 Thebes Site 2 Tsortzi plot	
Preservation	Badly preserved. Only a few sections of the apse, a partition wall and the side walls were. Part of the south-western section was not excavated.
Desertion	Presumably deserted.
Orientation	Roughly N-S, apse facing north.
Lay-out	Apsidal. At least two rooms.
Size	161+ m ² . Main room is at least 15.00 x 8.40 m, the apsidal room 4.50 x 8.40 m
Walls	-
Modifications	-
Floor	-
Furnishings	-
Finds	-
Activities	-
Date	EH III
References	Symeonoglou 1968, 1985
Illustration	After Symeonoglou 1968, figure 1

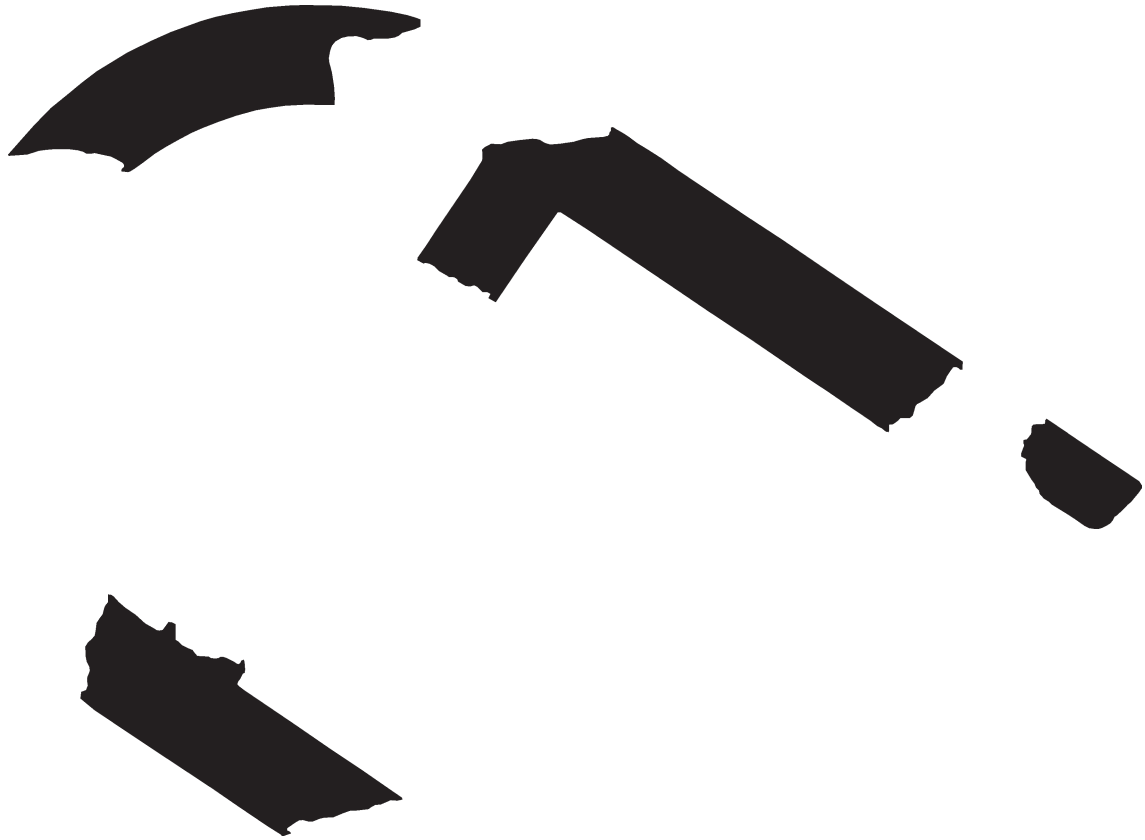


C26 Thebes Voglis plot	
Preservation	Seemingly well preserved, but only partly excavated.
Desertion	Presumably deserted?
Orientation	-
Lay-out	Rectangular?
Size	Excavated section was ca. 12+ m ² , (3.40 x 3.50 m)
Walls	Large stones, of which the sides seem to have been partly worked to create a face at the inside and outside of the wall, were placed in two rows apart. In between was rubble.
Floor	-
Furnishings	Drains were indicated in the plan. It is unclear to me how these were associated with the house remains.
Modifications	-
Finds	-
Activities	-
Date	MH
References	Spyropoulos 1974
Illustration	After Spyropoulos 1974, figure 9

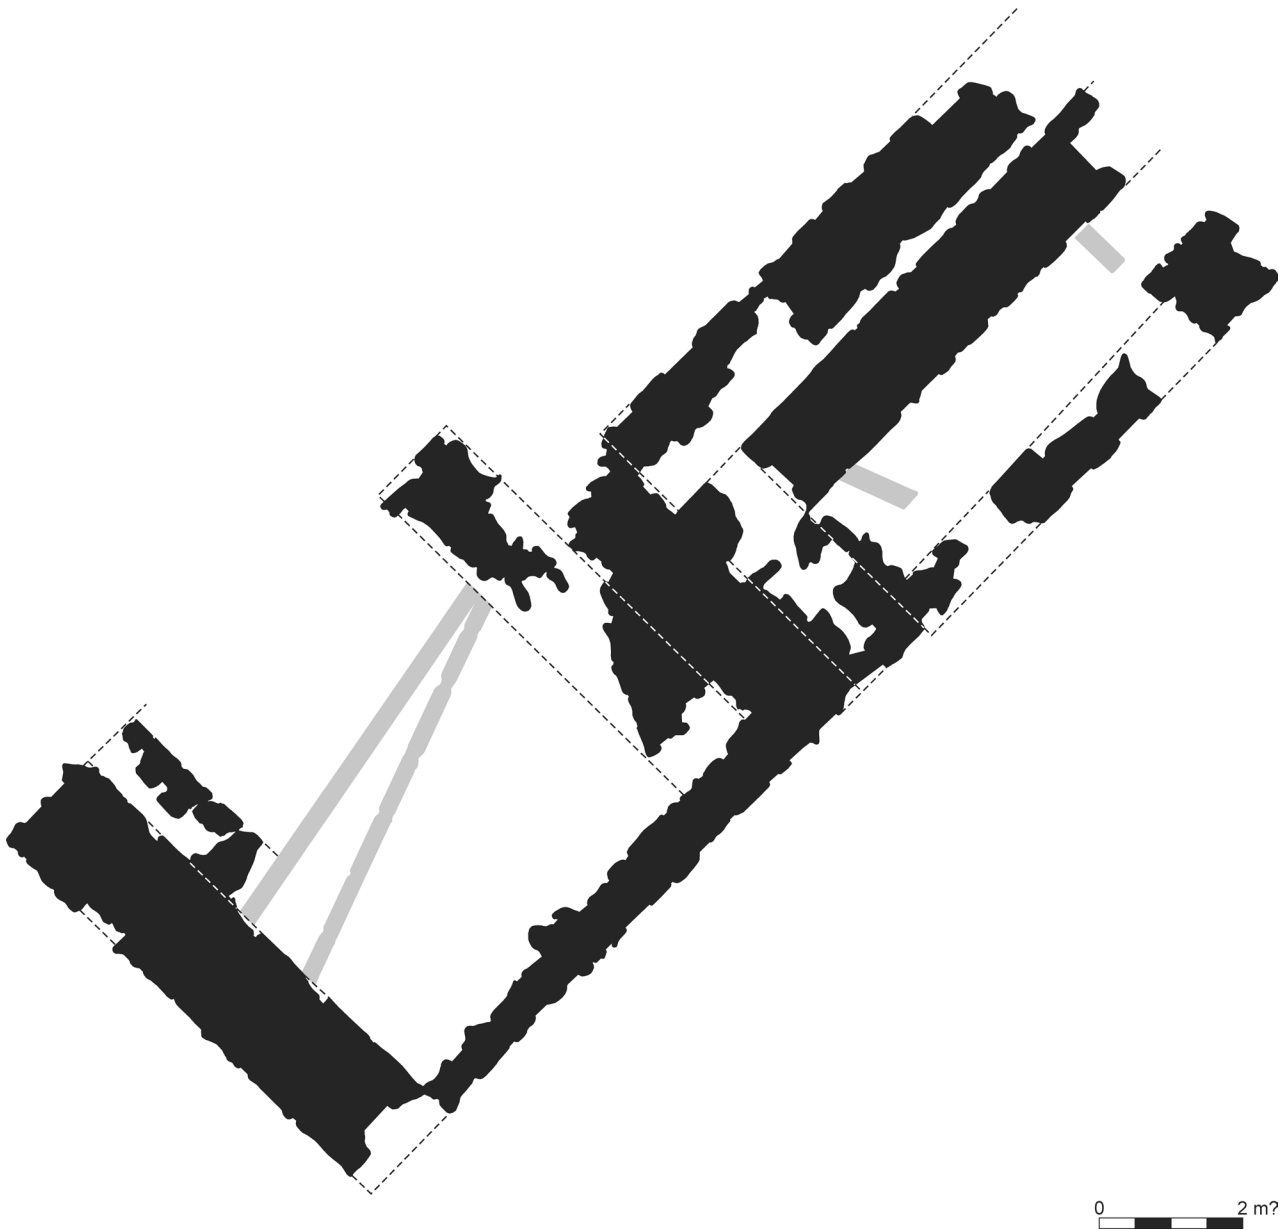


C27 Thebes Pindarou/Diki plot	
Preservation	Seemingly well preserved, but only the SE side was excavated.
Desertion	Presumably deserted?
Orientation	NW–SE
Lay-out	At least one room, which had a rectangular end.
Size	Unclear, as no scale was rendered in the published drawing of the house.
Walls	Two rows of irregular sized stones.
Modifications	-
Floor	White plaster floor
Furnishings	A badly preserved clay oval structure, probably an oven was located in the room. However, this feature was not rendered in the published plan.
Finds	Among the finds were weaving weights made of clay and bone, blades of flint and obsidian, stone bobbins and axes, bone pins and scrapers, sea shells, pieces of ivory and beads of amethyst.
Activities	Presumably all domestic activities
Date	MH II
References	Demakopoulou 1973-74, Demakopoulou and Konsola 1975, Symeonoglou 1985
Illustration	After Demakopoulou 1973-74, figure 8

C28 Thebes Site 2 Tsortzi plot	
Preservation	Badly preserved. Only the NW section of the house was uncovered.
Desertion	Fire destruction
Orientation	NW–SE
Lay-out	At least two rooms, a straight back, so presumably rectangular.
Size	Ca. 67 m ² was uncovered
Walls	Built of dressed masonry, in regular fashion. Ca. 0.50-0.60 m.
Modifications	The southern wall showed evidence of two construction phases. The earlier phase was dated to MH III.
Floor	Probably packed earth.
Furnishings	A rectangular feature was located in the northeastern corner, but not described.
Finds	-
Activities	-
Date	MH III–LH I
References	Symeonoglou 1968; Konsola 1981; Dakouri-Hild 2001
Illustration	After Symeonoglou 1968, figure 1

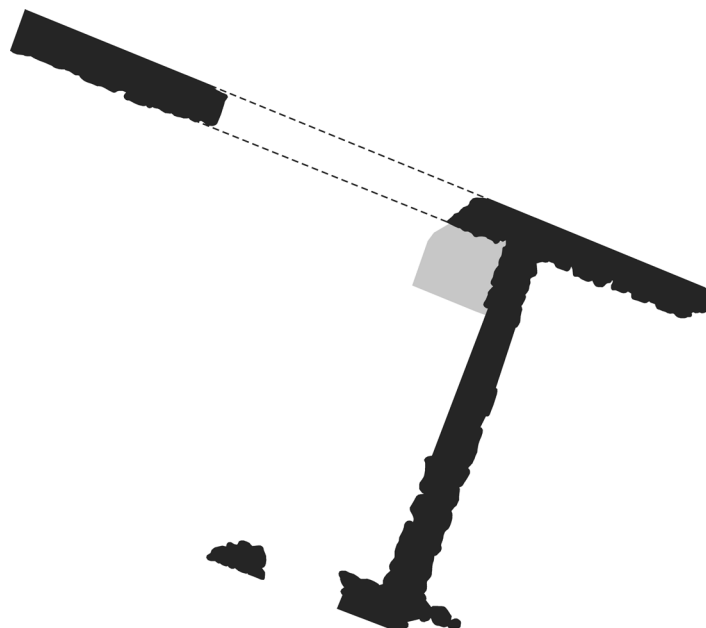



Catalogue D Euboea

Do1 Eretria building B	
Preservation	Well preserved, but recovered after illegal digging.
Desertion	Presumably deserted?
Orientation	N–S, entrance in the south.
Lay-out	Rectangular, three rooms. Connected with an external wall to another room or building.
Size	Total size of the house is 30 m ² . Room A: 2.20 x 1.30 m Room B: 2.20 x 3.00 m Room C: 4.80 x 4.30 m
Walls	The walls were strong, made of two rows of rough stones of various sizes, and filled with smaller stones. Clay was used as an adherent. One course was preserved of the northern wall, and three courses in the south. Ca. 0.35 m wide walls.
Modifications	The building underwent an intervention during the MH. It seems two layers were identified, but it remains unclear what exactly was meant with this 'intervention', as the remains were too disturbed.
Floor	Paved floor under which a layer of maritime gravel (river pebbles?) was deposited. This was perhaps used to water-proof the floor.
Features	Remains of a stone platform were recovered inside room C along the southern wall. On the floor, traces of red and grey soil with traces of burning were identified. It is not stated that these were indications of a fire destruction of the house, so perhaps these were traces of a fireplace. The features were not illustrated in the published plan.
Finds	Ceramics of EH II, EH III and MH date, stone tools.
Activities	-
Date	EH II–EH III?
References	Sapouna-Sakellarakis 1987
Illustration	After Sapouna-Sakellarakis 1987, Fig. 9

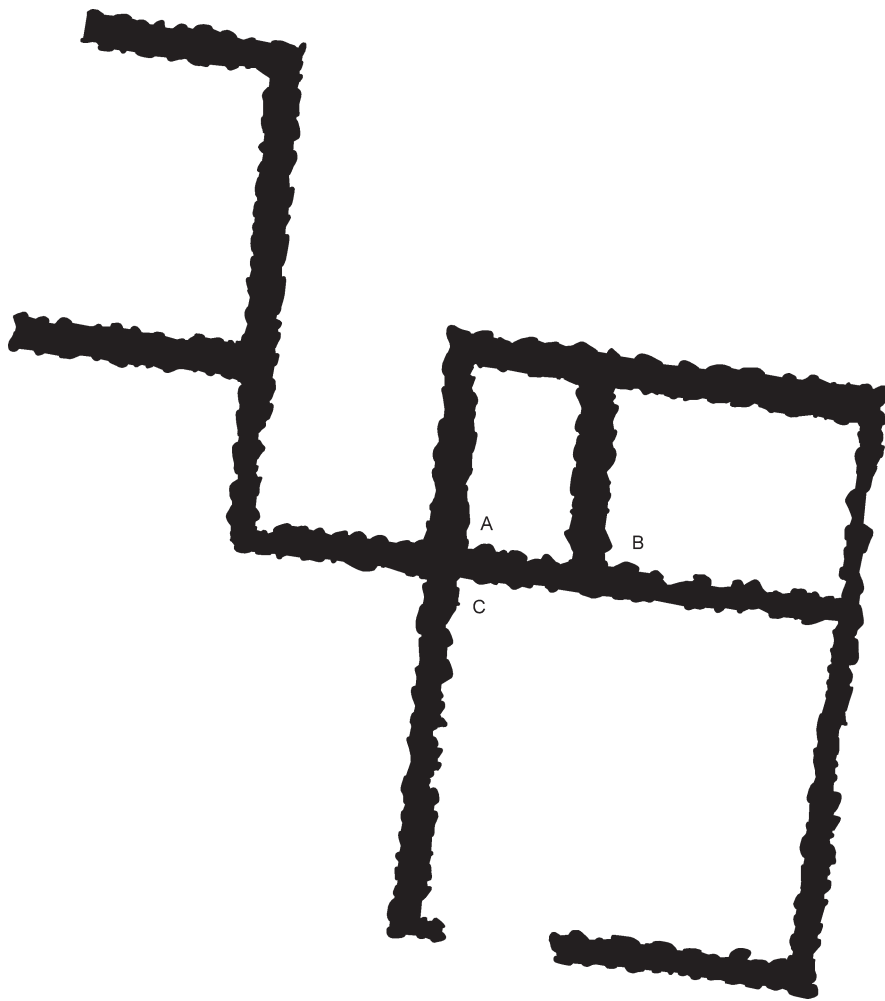


Do2 Fylla Kalogerovrysi	
Preservation	Poorly preserved. Disturbance due to ploughing in the south.
Desertion	Deserted? After desertion a Shaft Grave was constructed at the site, dating to LH I.
Orientation	NW–SE / possibly grouped around the summit of the hill.
Lay-out	Rectangular. It seems that the houses consists of agglomerated rooms. Perhaps the roofs were inclined, as remains of tiles were recovered.
Size	-
Walls	Two rows of tightly placed stones. Some stones were placed over the whole width of the wall. Occasionally three rows of stones. Walls were ca. 0.60 m wide.
Modifications	There is a succession of at least two MH building phases.
Floor	The floor in room 7 was paved with stone plates.
Features	-
Finds	Ceramics consist of Minyan ware, Matt Painted ware, local Plain and Coarse wares. Small finds consist of millstones, grinders, stone axe, obsidian blade, clay spindle whorls, several copper tools such as a knife, and a chisel, bones shells.
Activities	-
Date	Earlier MH en later MH.
References	Sampson 1993
Illustration	After Sampson 1993, plan 4

Do3 Manika building I	
Preservation	Seemingly well preserved, but only partly excavated.
Desertion	Deserted?
Orientation	NE–SW
Lay-out	Rectangular (?), at least two rooms.
Size	-
Walls	It seems two rows of closely packed stones. Ca. 0.50 m thick walls. Walls were preserved up to 0.65 m high.
Modifications	-
Floor	-
Features	In the NE-most room three narrow stone rows were constructed against the wall. A similar construction was seen in house K at Orchomenos, and in houses at Argissa and Pevkakia. Perhaps this was the base of a storage structure.
Finds	-
Activities	-
Date	MH
References	Choremis 1971
Illustration	After Choremis 1971, plan 7

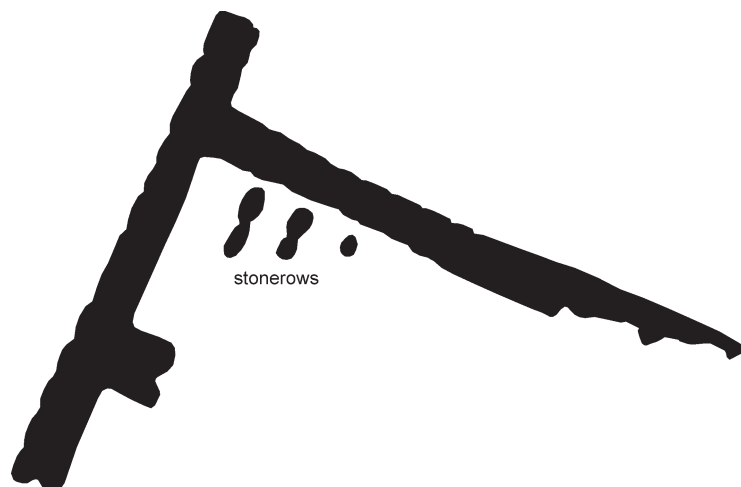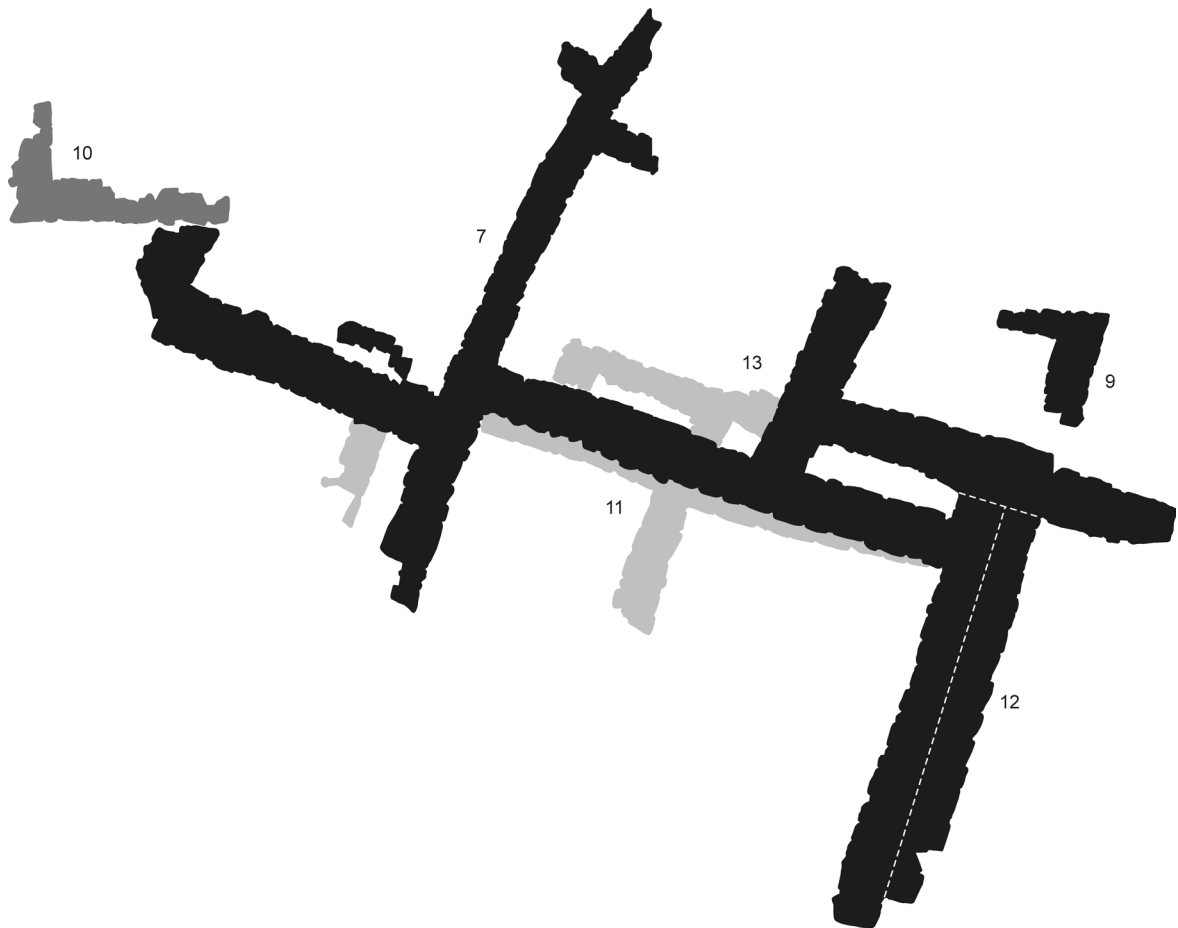

Do4 Manika building II	
Preservation	Seemingly well preserved, but only partly excavated.
Desertion	Deserted?
Orientation	NE–SW
Lay-out	Rectangular (?), at least two rooms.
Size	Width ca. 5.25 m
Walls	It seems two rows of closely packed stones. Ca. 0.50 m thick walls. Walls were preserved up to 0.84 m high.
Modifications	-
Floor	-
Features	Perhaps a rounded feature / pithos along the eastern wall of the back room. Perhaps a partitioned north-eastern corner in the main room.
Finds	-
Activities	-
Date	MH
References	Choremis 1971
Illustration	After Choremis 1971, plan 7

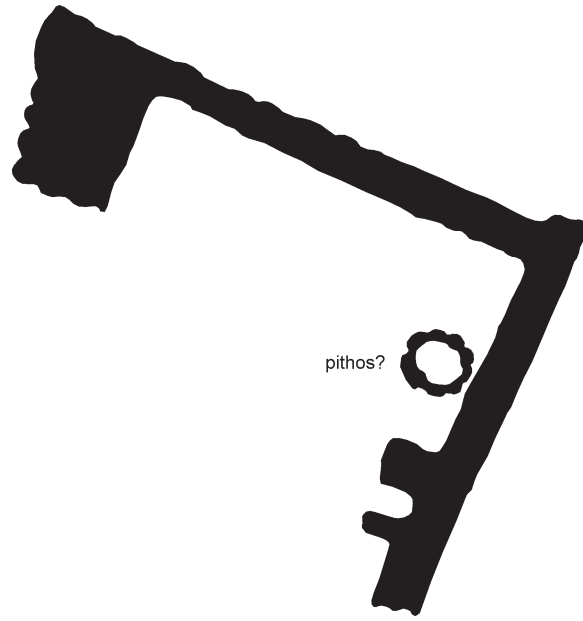


pithos?

Catalogue E Attica

Eo1 Athens house I at Parthenonos	
Preservation	Moderately to poorly preserved.
Desertion	Presumably deserted?
Orientation	NE–SW
Lay-out	Unclear, but the eastern part of house I was rectangular.
Size	I: ca. 2.40 x 3.85 m uncovered.
Walls	Walls were preserved up to 0.30 m high. Made of large stones with binding material.
Modifications	-
Floor	-
Furnishings	-
Finds	Minyan ceramics were recovered. Highlighted finds from the area were a large bowl imitating Minyan ware, and a large Matt Painted krater.
Activities	Unclear, no details published.
Date	MH
References	Donta 1961-1962
Illustration	After Donta 1961-1962: 84



Eo2 Brauron	
Preservation	Moderately well to poorly preserved.
Desertion	Presumably deserted?
Orientation	NW–SE
Lay-out	Rectangular, at least two rooms.
Size	Unclear, as no details were published.
Walls	Northern wall was preserved up to 2 meters. Built of small stones and mud bricks.
Modifications	At least once a floor renewal.
Floor	At least two floors, which were not described: 1. Early LH I date 2. LH I–LH II date
Furnishings	A large circular hearth.
Finds	Ceramics from first floor consisted of fragments of large closed vessels in Aeginetan gold mica and Mainland Polychrome, Grey Minyan carinated goblets, red burnished Cycladic bowls, and Minoanizing vessels of Cycladic character. Ceramics between first and second floor consisted of fragments of LH I large closed vessels of gold mica fabric, Monochrome Matt Painted Aeginetan ware, hydrae, Mainland Polychrome, Red Burnished Cycladic bowls, narrow necked jar with lid, and a Grey Minyan carinated goblet. Lustrous Decorated Mycenaean ceramics were not found. The ceramics from Brauron indicated contact with Mycenaean sites from the Argolid, and especially islands of the Saronic Gulf, the Cyclades, and the Northern Aegean.
Activities	All domestic activities?
Date	Early LH I–LH II
References	Papadimitriou 1956, Efstratiou 1999, 2000, 2001, and Kalogeropoulos 2010
Illustration	Efstratiou 1999, figure 18

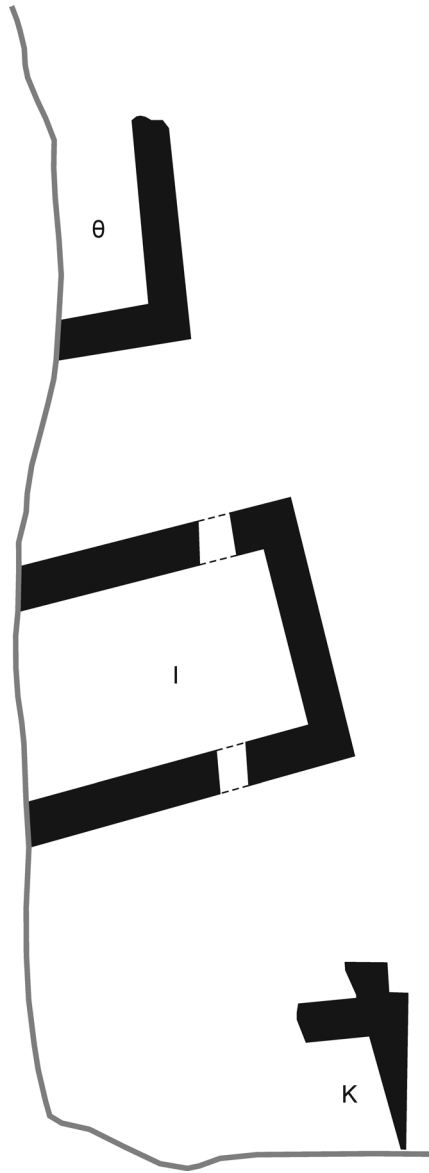

Eo3 Eleusis MH house A	
Preservation	Poorly preserved, only part of the northern section was preserved.
Desertion	Presumably deserted?
Orientation	NW–SE
Lay-out	Presumably rectangular, presumably two rooms.
Size	Uncovered for at least 14 m ² .
Walls	Made of large stones, placed over the whole width of the wall (Mylonas 1936: 417).
Modifications	-
Floor	-
Furnishings	-
Finds	-
Activities	-
Date	MH, perhaps more specifically the later MH
References	Kourouniotes and Mylonas 1933; Mylonas 1936
Illustration	After Kourouniotes and Mylonas 1933, plate XXXIV

Eo4 Eleusis house D	
Preservation	Poorly preserved, only some irregular wall sections were uncovered.
Desertion	Fire destruction.
Orientation	Roughly E–W, with a possible apsidal end in the east.
Lay-out	Unclear, both apsidal and rectangular are possible. Two or three rooms.
Size	Western room 1: Unclear Central room 2: ca. 5 m long Apsidal room 3: 2.50 m long
Walls	Two stone rows with filling in between. Wall ca. 0.40 m wide and preserved up to 0.45 m high.
Modifications	Perhaps a later attachment of the apse?
Floor	Beaten earth floor
Furnishings	-
Finds	-
Activities	Presumably all domestic activities.
Date	MH / synchronous with house E
References	Mylonas 1932b
Illustration	After Mylonas 1932b, figure 10



Eo5 Eleusis house E	
Preservation	Poorly preserved, only the northern section is partly preserved.
Desertion	Fire destruction, considering ash remains on the floor.
Orientation	Roughly E–W, with apse in the east.
Lay-out	Apsidal, at least two rooms.
Size	Uncovered for at least 6 m ² .
Walls	Two stone rows with filling in between. Width varies from 0.30–0.60. Preserved height varies from 0.50–0.90.
Modifications	Perhaps a later attachment of the apse?
Furnishings	-
Floor	-
Finds	No complete vessels or other objects were retrieved. However, many Minyan and Matt Painted sherds were found.
Activities	Presumably all domestic activities.
Date	MH / synchronous with house D
References	Mylonas 1932b
Illustration	After Mylonas 1932b, figure 8

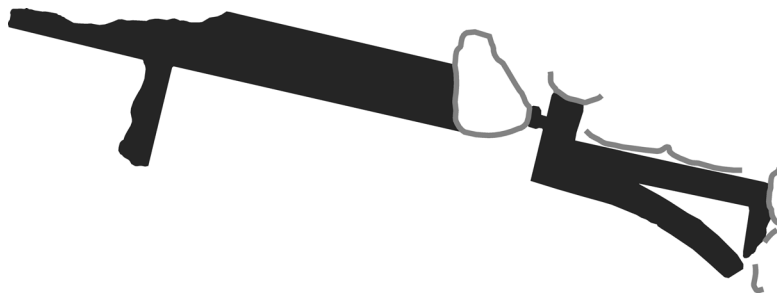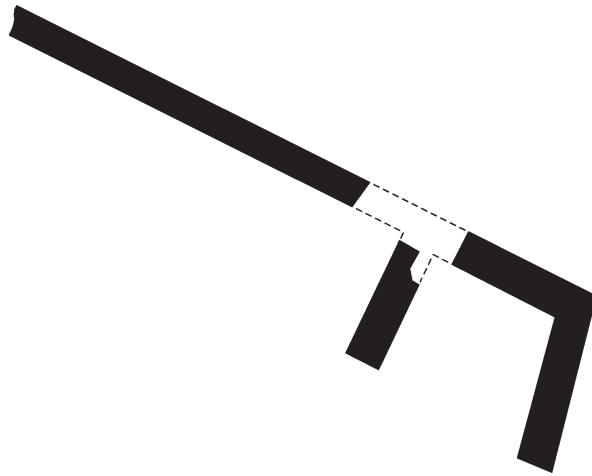

Eo6 Eleusis house C	
Preservation	Poorly preserved, fragmentary wall sections were uncovered.
Desertion	Fire destruction
Orientation	Probably E–W
Lay-out	Possibly rectangular, at least two rooms but perhaps more.
Size	Uncovered for at least 10 m ² .
Walls	0.60–0.90 m wide
Modifications	Seemingly second MH habitation, as a second 0.05 thick destruction layer was recovered on top of the first. This is dated to MH II.
Floor	-
Furnishings	-
Finds	Room 2: fragments of Minyan and Matt Painted vessels and remains of 20 cups. In second destruction layer: Minyan bowl.
Activities	Presumably all domestic activities.
Date	MH II (and earlier?)
References	Mylonas 1932b
Illustration	After Mylonas 1932b, figure 10

Eo7 Eleusis house Z	
Preservation	Moderately well preserved. Southern half not entirely uncovered.
Desertion	Presumably deserted?
Orientation	Roughly E–W
Lay-out	Seemingly rectangular and two rooms.
Size	Uncovered for at least 36 m ² .
Walls	-
Modifications	-
Furnishings	Ring made of the belly of a pithos. Perhaps used as hearth, but few ash remains were actually recovered.
Floor	-
Finds	Ring made of the belly of a pithos.
Activities	Presumably all domestic activities.
Date	MH II
References	Mylonas 1932b
Illustration	After Mylonas 1932b, plan 1


Eo8 Eleusis house R	
Preservation	Moderately to poorly preserved. Southern half not excavated.
Desertion	Presumably deserted?
Orientation	Possibly E–W
Lay-out	Seemingly rectangular, at least two rooms.
Size	Anterior room: 1.90 m long Other room: 2.50 m long
Walls	Made of stones, with sherds in between. Ca. 0.38 m wide and preserved up to 0.25 m.
Modifications	-
Floor	Beaten earth floor
Furnishings	-
Finds	Minyan and Matt painted sherds.
Activities	Presumably all domestic activities.
Date	MH II
References	Mylonas 1932b
Illustration	After Mylonas 1932b, plan 1

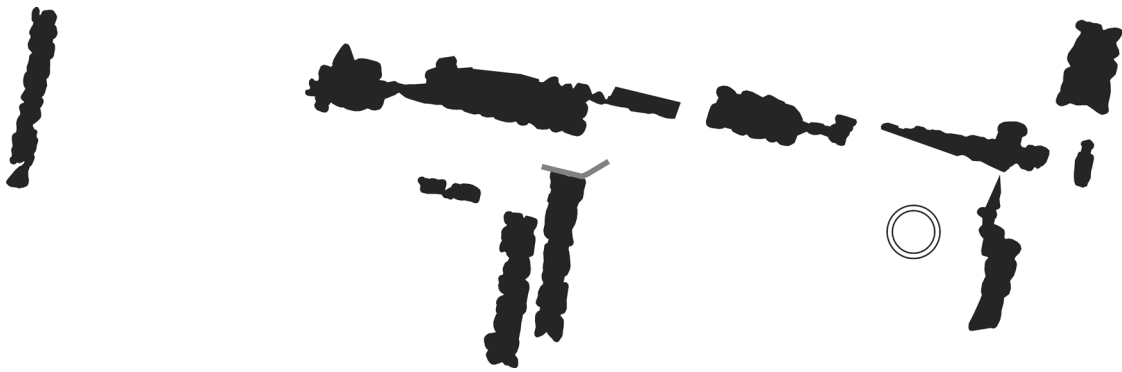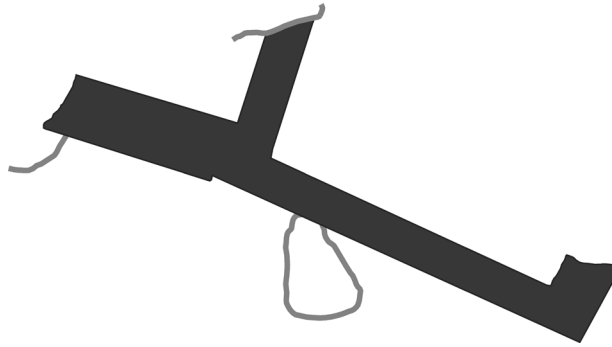

E09 Eleusis house H	
Preservation	Poorly preserved, only part of the northern section remains
Desertion	Destroyed by fire.
Orientation	NW–SE, entrance in the southeast.
Lay-out	Presumably rectangular, possibly two rooms and an entrance area.
Size	Entrance area 2.40 m long, main room 5.40 m long, and 2.10+ m wide, but probably at least 5.00 m wide. Back room also 2.40 m long, but of unclear width.
Walls	Two closely packed stone rows, up to as high as 1.40 m, while partitions up to 0.40 m high. Ca. 0.50 m wide
Modifications	Hiesel 1990: 47: The porch was closed off with a wall between the antes and the floor paved with stones plaques. But this modification is not dated (Mylonas Proistoriki Eleusis: 33)
Floor	Made of pebbles and beaten earth.
Furnishings	-
Finds	-
Activities	-
Date	LH I
References	Mylonas 1932b, Hiesel 1990: 46-47
Illustration	After Mylonas 1932b, figure 18

E10 Eleusis house I	
Preservation	Poorly preserved
Desertion	Presumably deserted?
Orientation	NW–SE
Lay-out	Rectangular, probably two or three rooms.
Size	Main room ca. 5.50 m long.
Walls	Preserved up to 0.25 m.
Modifications	-
Floor	-
Furnishings	-
Finds	Sherds of up to 346 cups
Activities	Presumably all domestic activities.
Date	LH I
References	Mylonas 1932b
Illustration	After Mylonas 1932b, plan 1

E11 Kiapha Thiti	
Preservation	Poorly preserved. It seems that the whole southern section was obliterated by later building activities.
Desertion	Presumably deserted?
Orientation	NE–SW, with the apse in the north-east.
Lay-out	Apsidal, unclear how many rooms.
Size	Uncovered for ca. 35 m ²
Walls	Width ca. 1.30 m Stone foundation walls preserved up to 2.80 m.
Modifications	-
Floor	-
Furnishings	Two walls stubs were perhaps for the support of a vessel, but I could not identify these in the published plan.
Finds	Possibly sherds of a bowl, a goblet and two cooking pots (Schnitt 55, SE 1 and SE 2)
Activities	Presumably all domestic activities.
Date	MH III–LH I/II
References	Maran 1992b, Lauter 1996
Illustration	After Lauter 1996, Beilage 7

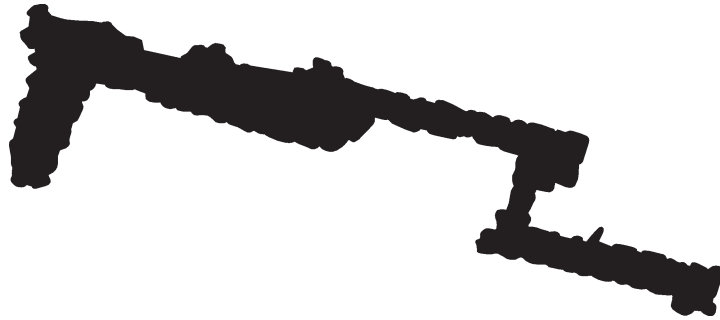


E12 Kolonna house 3	
Preservation	Poorly preserved
Desertion	Destroyed by fire.
Orientation	ENE-WSW
Lay-out	Rectangular, one room with two entrances. One led to the court, and the other led to a room or corridor connecting house 3 with house 7.
Size	Ca. 15 m ² (3.30 x 4.65 m).
Walls	The walls were made of stone. Ca. 0.38-0.68 m wide, and up to 2.50 m high preserved. The walls were plastered.
Modifications	-
Floor	Green-grey marl floor
Furnishings	-
Finds	Amphora, bass bowl, cup, krater, narrow necked jar, wide mouthed jar and a terracotta spindle whorl.
Activities	Household activities
Date	EH III
References	Walter and Felten 1981
Illustration	After Maran 1998, figure 68, which is after Walter and Felten 1981, figure 22, plan 7

E13 Kolonna house 4	
Preservation	Moderately preserved
Desertion	Destroyed by fire.
Orientation	ENE-WSW
Lay-out	Rectangular, at least two rooms.
Size	Room 1: 3.00 x 3.53 m Room 2: 2.25 x 3.38 m Total house ca. 18 m ²
Walls	Ca. 0.53-0.60 m. Preserved up to 1.20 m.
Modifications	-
Floor	Green-grey marl floor
Furnishings	Small bothros in the back room, which I could not identify in the published plan. In the corner of the back room was a stone plastered area, on which wheat was grained.
Finds	The small bothros contained an animal hide. On the stone plaster remains of wheat and rubbers. Bass bowl, cup, tankard, two wide mouthed jars, and four spindle whorls.
Activities	Household activities
Date	EH III
References	Walter and Felten 1981
Illustration	After Maran 1998, figure 68, which is after Walter and Felten 1981, figure 22, plan 7

E14 Kolonna house 5	
Preservation	Poorly preserved.
Desertion	Destroyed by fire.
Orientation	ENE-WSW
Lay-out	Rectangular, one room preserved, but three reconstructed in total.
Size	At least 27 m ² uncovered
Walls	Ca. 0.53-0.91 m wide.
Modifications	-
Floor	In the back room, pieces of wood were placed in the floor, perhaps functioning as support for a wooden floor, although other functions might also be suggested.
Furnishings	See floor.
Finds	-
Activities	Household activities
Date	EH III
References	Walter and Felten 1981
Illustration	After Maran 1998, figure 68, which is after Walter and Felten 1981, figure 22, plan 7


E12-E16

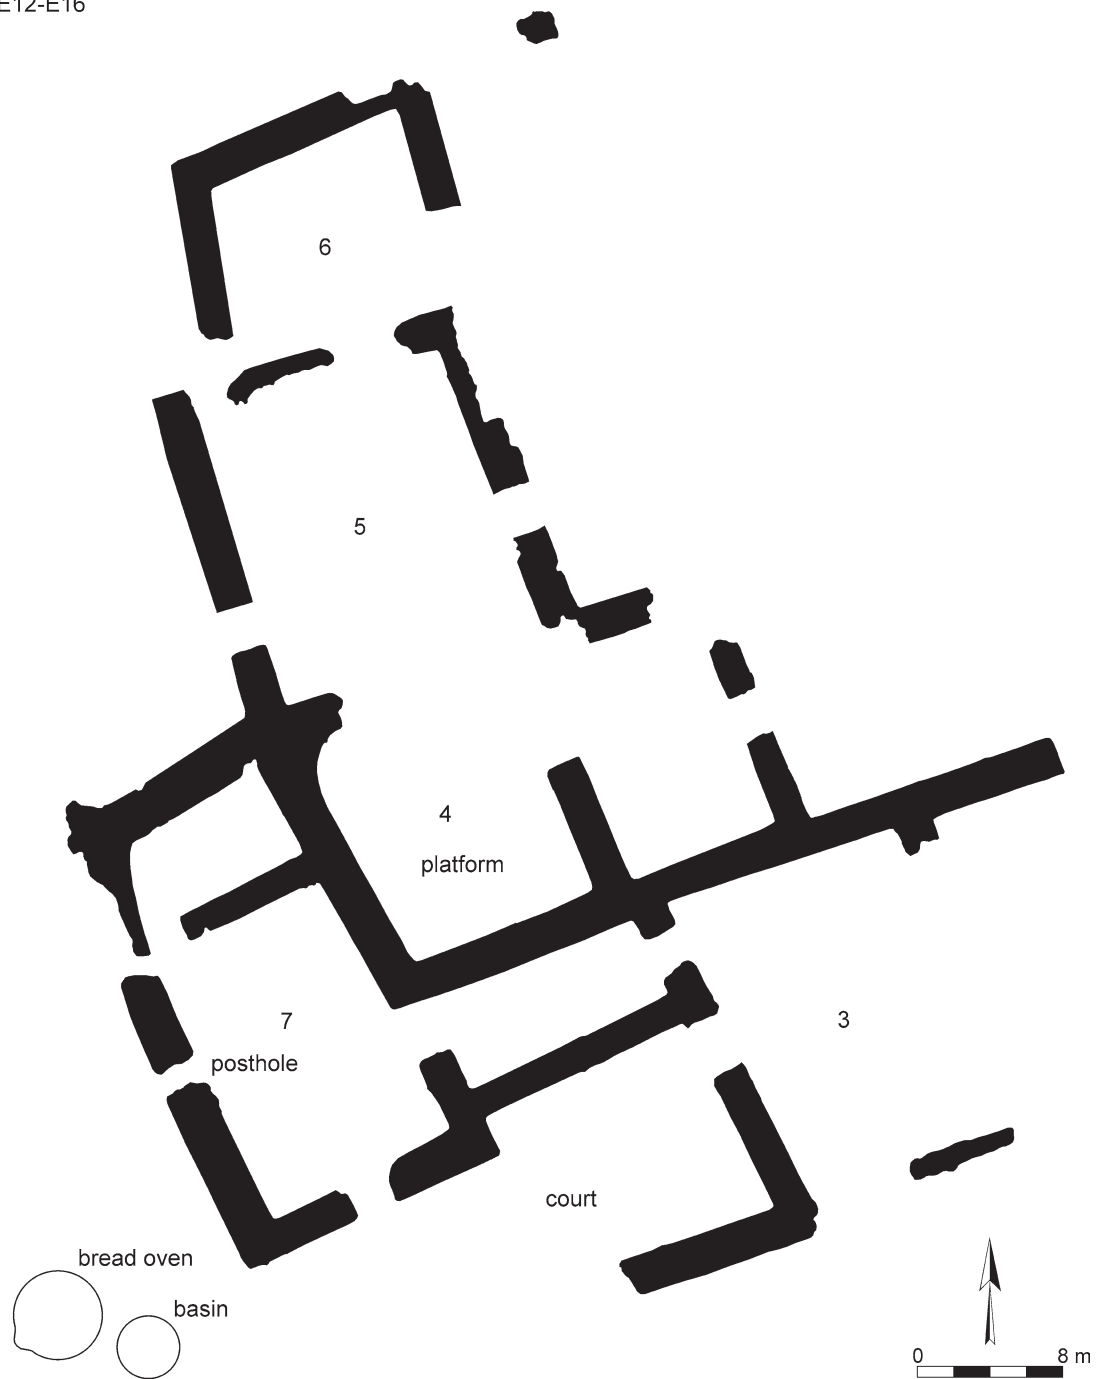

E15 Kolonna house 6	
Preservation	Poorly preserved
Desertion	Destroyed by fire.
Orientation	ENE-WSW
Lay-out	Rectangular, one room uncovered, but two were reconstructed.
Size	At least 8.1 m ² uncovered, at least 8.20 m long.
Walls	Ca. 0.60 m wide.
Modifications	-
Floor	-
Furnishings	-
Finds	Amphora, two bowls, a cup, a jug, two tankards and two wide mouthed jars.
Activities	Household activities
Date	EH III
References	Walter and Felten 1981
Illustration	After Maran 1998, figure 68, which is after Walter and Felten 1981, figure 22, plan 7

E16 Kolonna house 7	
Preservation	Well preserved
Desertion	Destroyed by fire
Orientation	NNW-SSE
Lay-out	Rectangular, two rooms. Two entrances were located in the main room.
Size	Room 1: 1.28 x 2.48 Room 2: 4.20 x 2.85 Total size of house ca. 15 m ²
Walls	Ca. 0.6-0.9 m wide, and up to 1.20 m high preserved.
Modifications	-
Floor	Not mentioned, but presumably clay floor.
Furnishings	Pivot stone at the western entrance.
Finds	Pivot stone at the western entrance. Amphora, askos, three bass bowls and two cups.
Activities	Household activities
Date	EH III
References	Walter and Felten 1981
Illustration	After Maran 1998, figure 68, which is after Walter and Felten 1981, figure 22, plan 7


E12-E16

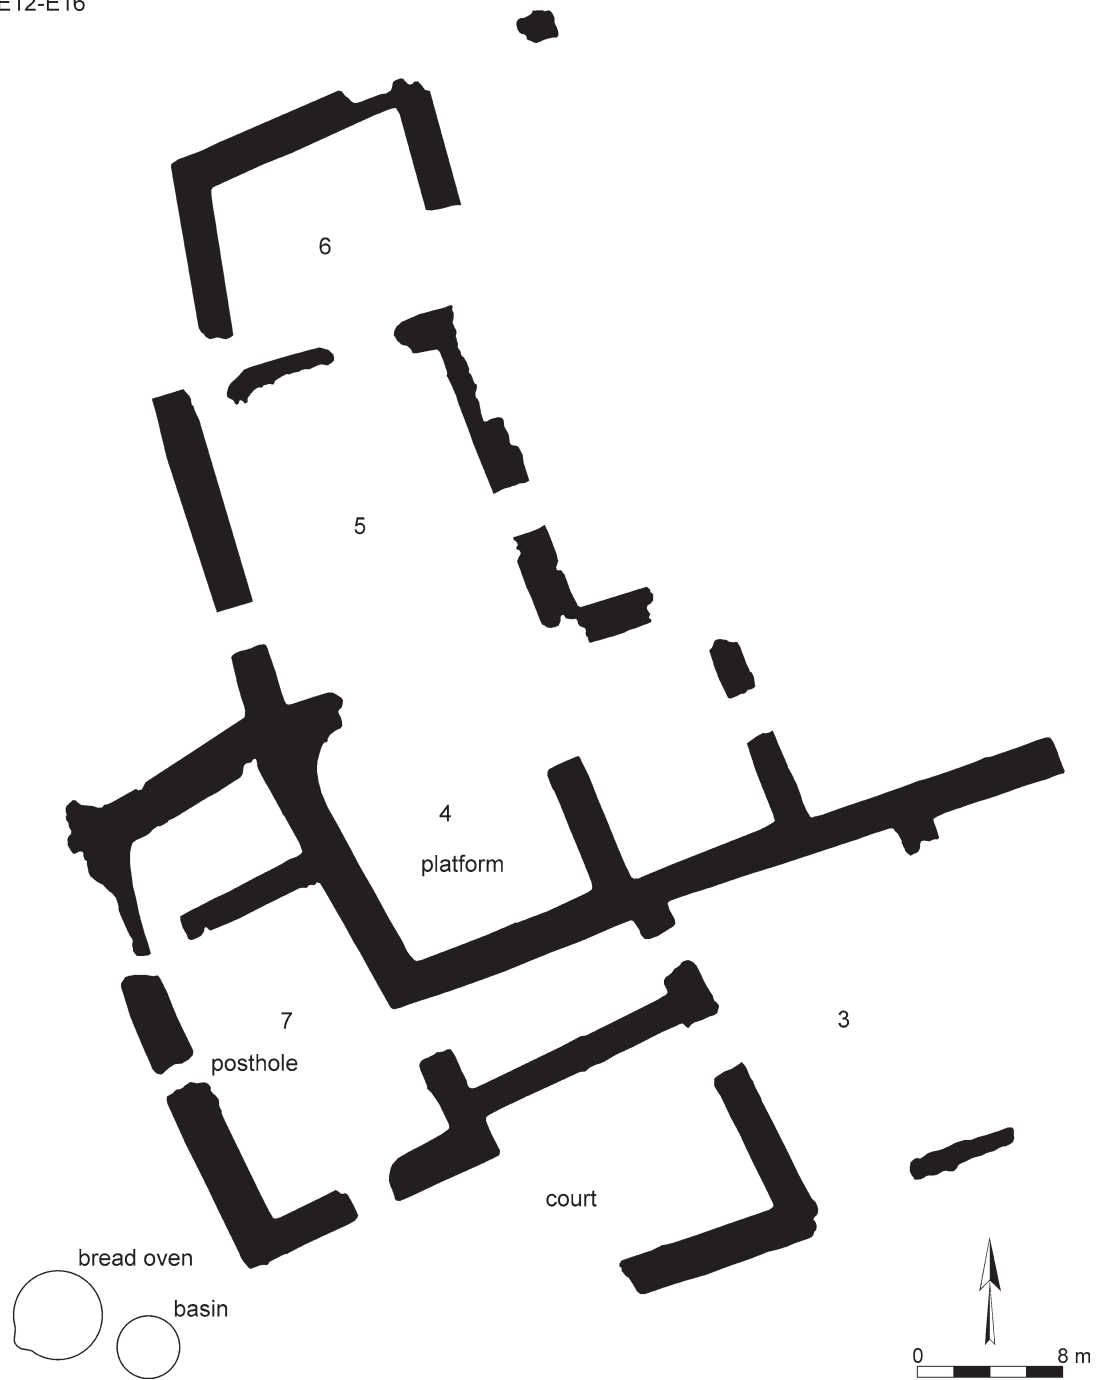

E17 Kolonna house 19	
Preservation	Seemingly well preserved. But only uncovered for a limited extent.
Desertion	Fire destruction
Orientation	Roughly N–S
Lay-out	Unclear, but at least two rooms.
Size	Uncovered for ca. 8 m ²
Walls	Two or three stone rows wide.
Modifications	-
Floor	-
Furnishings	-
Finds	Several vessels were illustrated in the plan.
Activities	Household activities
Date	EH III
References	Gauss and Smetana 2004
Illustration	After Gauss and Smetana 2004, figure 3A


E18 Kolonna south hill house 1	
Preservation	Unclear, as it was only uncovered for a small section.
Desertion	Presumably deserted?
Orientation	Possibly E–W, with apse in the east.
Lay-out	Apsidal, but unclear if it was a freestanding structure or not.
Size	Unclear, as it was only uncovered for a small section.
Walls	-
Floor	Not identified during excavation.
Furnishings	Traces of white plaster were found on the inside of the wall.
Modifications	-
Finds	-
Activities	Unclear, due to lack of information and finds.
Date	EH III/MH
References	Felten et al 2005, 2006, 2007
Illustration	-

E19 Kolonna south hill house 2	
Preservation	Unclear, as it was only uncovered for a small section.
Desertion	Presumably deserted?
Orientation	Possibly E–W, with apse in the east.
Lay-out	Apsidal, but unclear if it was a freestanding structure or not.
Size	Unclear, as it was only uncovered for a small section.
Walls	-
Floor	Not identified during excavation.
Furnishings	Traces of white plaster were found on the inside of the wall.
Modifications	This seems to be a rebuilding of house 1.
Finds	-
Activities	Unclear, due to lack of information and finds
Date	EH III/MH
References	Felten et al 2005, 2006, 2007
Illustration	-

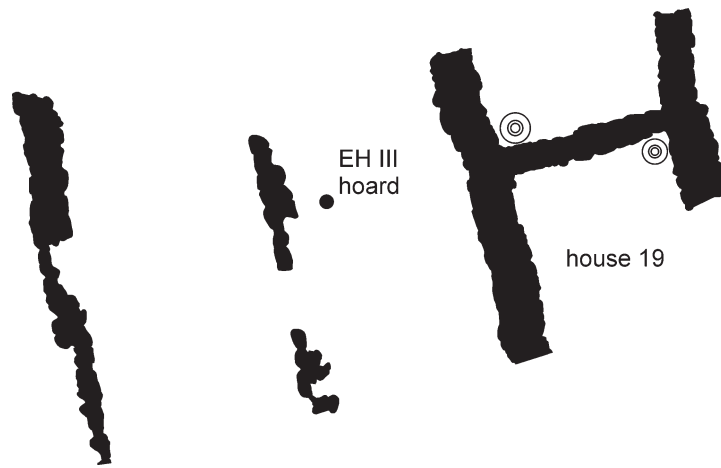


E20 Kolonna house 4	
Preservation	Northern wall disturbed by modern rebuilding activities.
Desertion	Presumably deserted?
Orientation	NW–SE
Lay-out	Rectangular, presumably two rooms.
Size	At least 35 m ² Room 4A: 5.00 x 2.00 m Room 4B: 5.00 x 5.00+ m
Walls	-
Modifications	None mentioned, though older wall remains were uncovered.
Floor	The floor was not identified or described.
Furnishings	-
Finds	-
Activities	Unclear
Date	MH I–MH II
References	Felten and Hiller 1996
Illustration	After Felten and Hiller 1996, folded plan

E21 Kolonna house 5	
Preservation	The eastern part of the house is built upon during modern times. As a result, room 5A and the eastern part of room 5B could not be researched.
Desertion	Presumably deserted?
Orientation	NW–SE
Lay-out	Rectangular, three rooms.
Size	Ca. 40 m ² Room 5A: 3.70 x 2.50 m Room 5B: 4.20 x 4.50 m Room 5C: 3.50 x 3.20 m
Walls	-
Modifications	Below the possible MH floor, was an EH III floor, sealed with ash remains. Perhaps the partition wall was constructed at a later point.
Floor	Floor mentioned, but not described. Possibly MH in date, but ceramics to date the floor were lacking.
Furnishings	A bothros was associated with the possible MH floor, located beneath the partition wall between rooms 5b and 5c (not illustrated in plan).
Finds	Fragments of an EH III proto-Minyan and a black polished bowl with wheel marks, were associated with the lower floor, but also with the bothros.
Activities	Presumably all domestic activities.
Date	MH I–MH II
References	Felten and Hiller 1996
Illustration	After Felten and Hiller 1996, folded plan

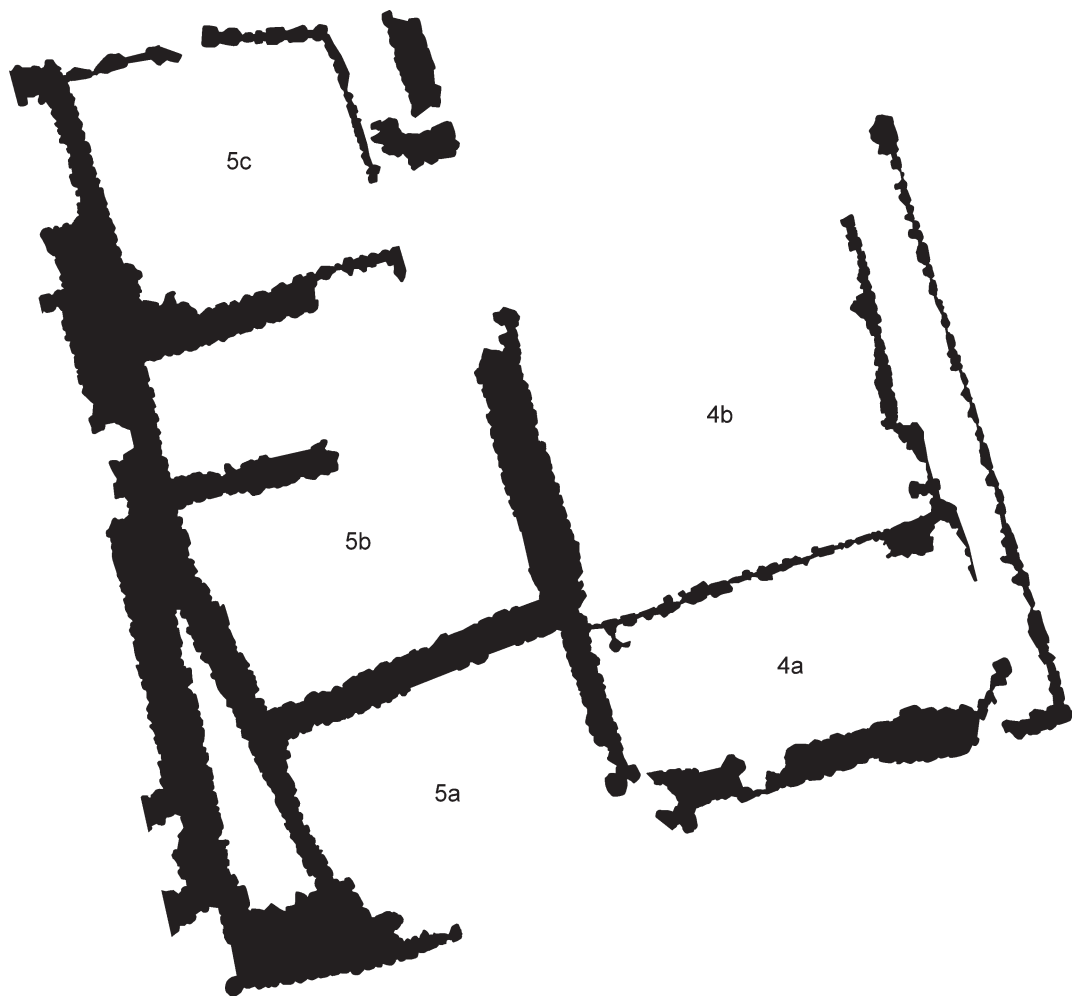


E22 Kolonna house 6	
Preservation	The house was excavated earlier, and was afterwards affected heavily by erosion. Lacking floors and finds, it was difficult for Felten and Hiller to interrelate the architectural remains.
Desertion	Presumably deserted?
Orientation	NW–SE
Lay-out	Rectangular, five rooms.
Size	Ca. 42 m ² Room 6A: 2.50 x 1.00 m Room 6B1: 3.00 x 2.50 m Room 6B2: 1.60 x 2.50 m Room 6C: 5.20 x 3.00 m Room 6D: 5.20 x 2.30 m
Walls	-
Modifications	Probably several floors ranging from EH III to MH.
Floor	Removed during earlier excavations.
Furnishings	Below the partitioned wall between rooms C and D were remains of an EH III hearth, covered with a fire/destruction layer (not illustrated in plan).
Finds	-
Activities	Presumably all domestic activities.
Date	MH I–MH II
References	Felten and Hiller 1996
Illustration	After Felten and Hiller 1996, folded plan

E23 Kolonna house 7	
Preservation	The house was excavated earlier, except for a small section in room 7A.
Desertion	Presumably deserted?
Orientation	NW–SE
Lay-out	Rectangular, four rooms.
Size	Ca. 37 m ² Room 7A: 3.70 x 3.50 m Room 7B: 3.70 x 2.50 m Room 7C: 3.30 x 2.00 m Room 7D: 3.50 x 2.30 m
Walls	-
Modifications	Several floors were constructed.
Floor	Not described, but at least four floors were identified, of possible EH III or MH date.
Furnishings	-
Finds	-
Activities	Presumably all domestic activities.
Date	MH I–MH II
References	Felten and Hiller 1996
Illustration	After Felten and Hiller 1996, folded plan

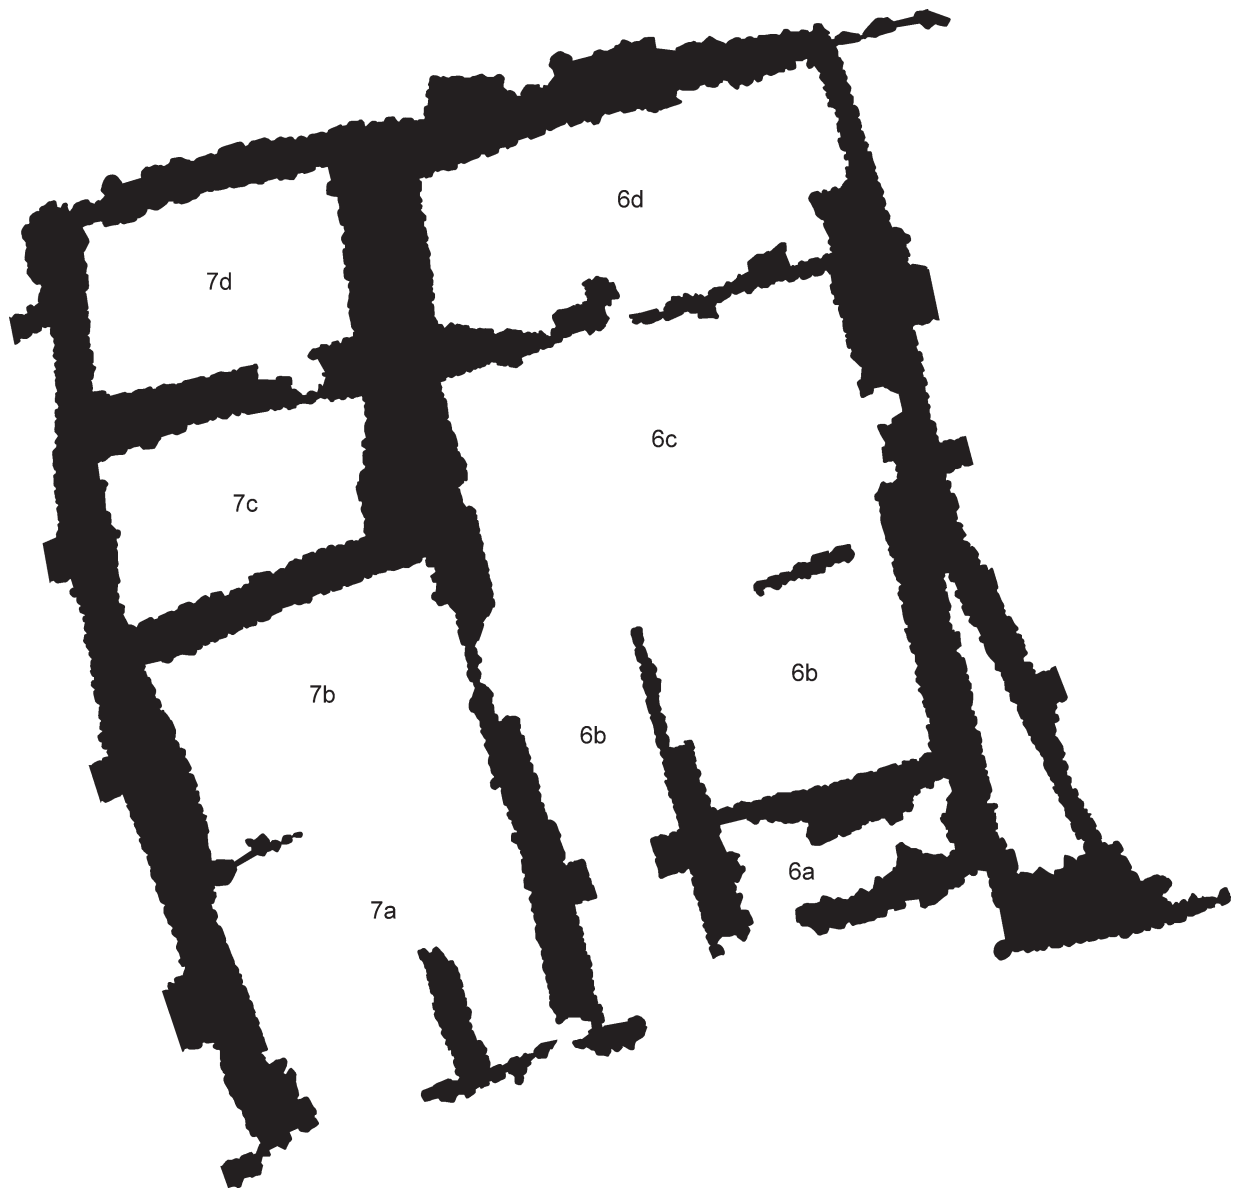

E24 Kolonna house 8	
Preservation	Earlier excavations here had caused disturbances, which made interpretation of the architectural remains difficult.
Desertion	Presumably deserted?
Orientation	NW–SE
Lay-out	Rectangular, four rooms
Size	Ca. 34 m ² Room 8A: 3.50 x 1.50 m Room 8B: 3.60 x 2.60 m Room 8C: 3.70 x 2.20 m Room 8D: 5.10 x 2.20 m
Walls	-
Modifications	Several floors were constructed.
Floor	At least four MH floor were identified, but not described. Below that were EH III floors.
Furnishings	A bothros was associated with the earliest MH floor in room 8B (not illustrated in plan).
Finds	Early MH ceramics were found in the bothros, consisting of a red burnished bowl, brown burnished kantharos, painted jug, base with wheel marks, GM sherds, but few MP sherds. Among the finds was also a terracotta spoon-like object, which perhaps might have been used as a crucible?
Activities	Presumably all domestic activities.
Date	MH I–MH II
References	Felten and Hiller 1996
Illustration	After Felten and Hiller 1996, folded plan



E25 Kolonna house 9	
Preservation	Earlier excavations here had caused disturbances, which made interpretation of the architectural remains difficult. Also, the northern section was disturbed by an Antique or Modern pit.
Desertion	Presumably deserted?
Orientation	NW–SE
Lay-out	Rectangular, four rooms.
Size	At least 19 m ² uncovered Room 9A: 2.60 x 3.20 m Room 9B: 3.00 x 1.30 m Room 9C: 2.50 x 2.50 m Room 9D: unclear
Walls	-
Modifications	-
Floor	MH floor. Several earlier EH III floors were also identified; one was sealed with a destruction layer.
Furnishings	In the north-western corner of room 9A a child pithos grave was found, of possible MH date (not illustrated in plan).
Finds	In room 9A: a ceramic depot consisting of at least three vessels: an angular pedestaled bowl with basket handles a rounded cup and a small jug or cooking vessel? Bothros in north-eastern corner of room 9A: MH ceramics: red burnished Aeginetan bowl, two fragmented Cycladic vessels with subsequently white decoration and incised decoration
Activities	Presumably all domestic activities.
Date	MH I–MH II
References	Felten and Hiller 1996
Illustration	After Felten and Hiller 1996, folded plan

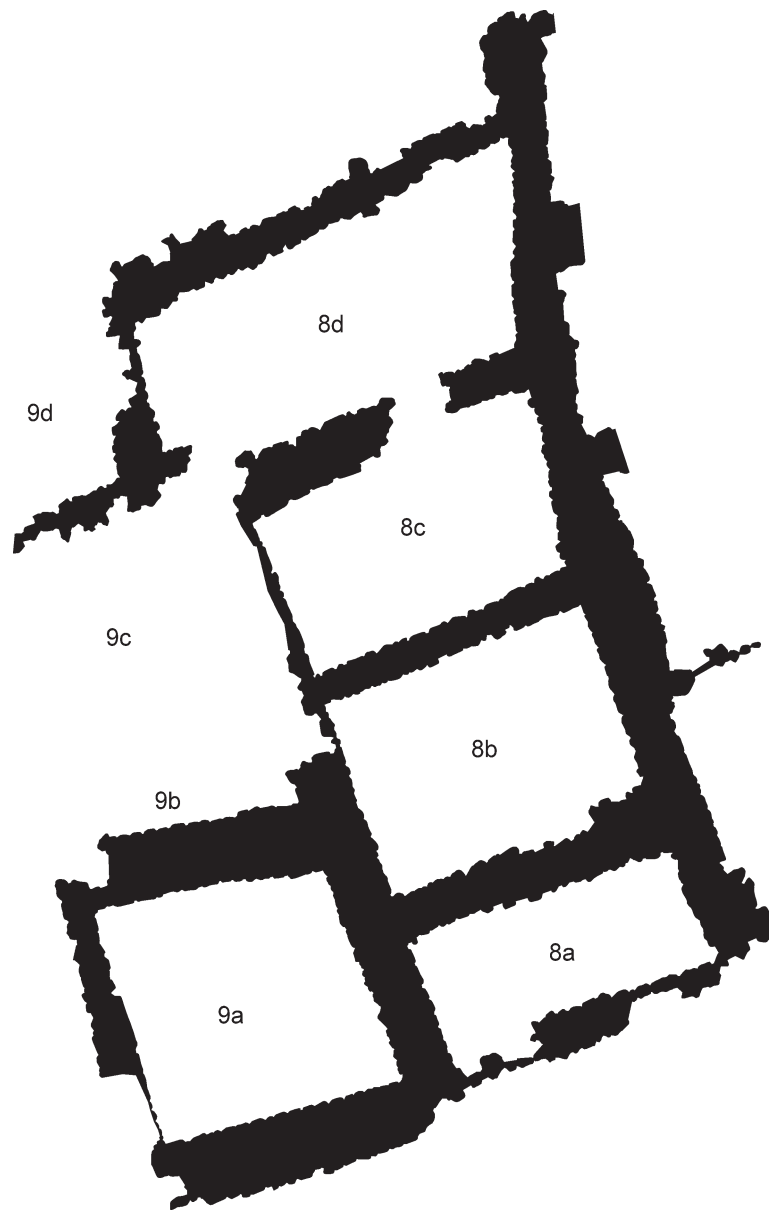

E26 Kolonna Haus im Südhof	
Preservation	Moderately preserved. The eastern and southern sections are lacking.
Desertion	Presumably deserted?
Orientation	NE–SW, entrance in the NW.
Lay-out	Rectangular, two rooms.
Size	Total size is circa 19 m ² Room 1: 2.10 x 3.00 m Room 2: 4.20 x 3.00 m
Walls	Stronger stones under and smaller stones on top. Five courses, the upper one is carefully laid with small stones. On the walls is clay plaster.
Modifications	-
Floor	-
Furnishings	Bothros and a stone bench (?) along the wall. A rectangular stone platform in the north-western corner.
Finds	In bothros XXXVII: remains of a krater
Activities	Unclear
Date	MH II (phase IX)
References	Walter and Felten 1981
Illustration	After Walter and Felten 1981, figure 66

E27 Kolonna Pithos house	
Preservation	Reasonably preserved.
Desertion	Presumably deserted?
Orientation	NE–SW
Lay-out	Rectangular. Consisting of only one room. Attached with a wall to the defence wall. As such a small partitioned area is created towards the eastern side of the house.
Size	Ca. 37 m ² Room 1: 7.90 x 4.65 m
Walls	-
Modifications	-
Floor	-
Furnishings	-
Finds	XXXVIII: painted fragments of a pithos/amphora (?), two closed vessels, two cups/kantharoi, two cups/mugs, a plate (?), an open vessel, a vessel and an anchor.
Activities	Storage, drinking, eating (?), and cooking (?)
Date	MH III–LH I (city X)
References	Walter and Felten 1981
Illustration	After Walter and Felten 1981, Plan 12

E28 Kolonna Haus an der Strasse	
Preservation	Poorly preserved. Section of the western side is missing.
Desertion	Presumably deserted?
Orientation	NE–SW
Lay-out	Rectangular. Consisting of only one room.
Size	Room 1: 6.50 x 4.70 m Total size ca. 31 m ²
Walls	-
Modifications	-
Floor	-
Furnishings	-
Finds	Unclear
Activities	Unclear
Date	MH III–LH I (city X)
References	Walter and Felten 1981
Illustration	After Walter and Felten 1981, Plan 12

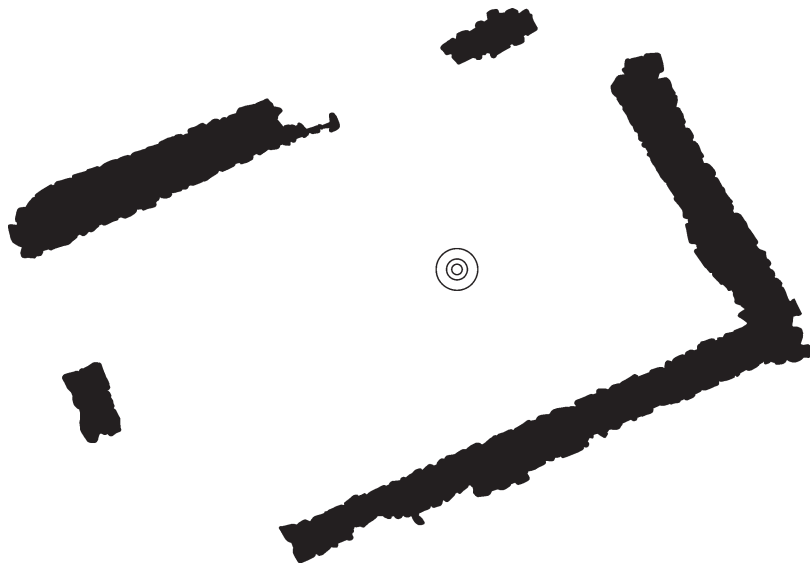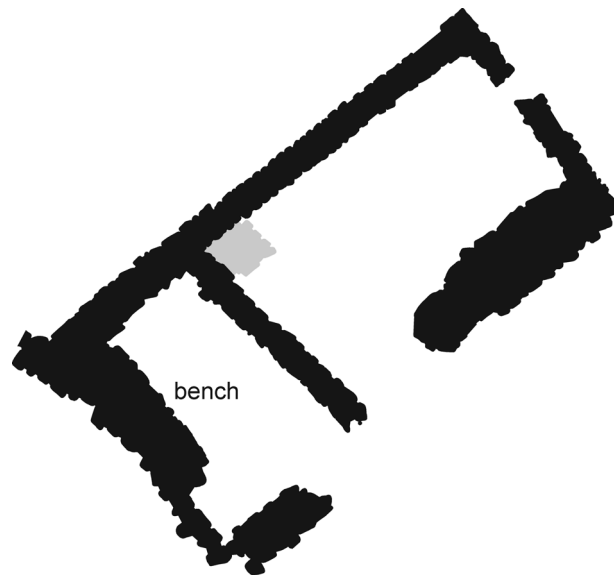

E29a Kolonna Large Building Complex (phase 1)	
Preservation	Moderately preserved. Distortion because of Byzantine and late Roman activities. The building extended further east and west, but no excavations have taken place here.
Desertion	Modified, see E29b.
Orientation	N–S
Lay-out	Rectangular, three rooms. The northern room had two entrances. The northern entrance probably led outside. The eastern entrance led into another room, or outside. A third entrance led into the main room in the south. The southern room contained an entrance that led to the east.
Size	Phase 1: 200 m ² (minimum exterior dimensions: 25 x 8 m). Main room: 14 m long
Walls	At least 0.80 m wide. Very large stones are used for the construction of the walls.
Modifications	Several floors were constructed. Towards the end of the first use phase, the floor in the central area was raised 50–60 cm. And extensions towards the north and west were built. The extension towards the north included rooms 1 and 2.
Floor	A number of beaten floors was identified.
Furnishings	-
Finds	In the fill, covering the final use phase were recovered many animal bones, among them red deer, boar, possibly an aurochs, and a lion's bone. Furthermore, the ceramics are of a high quality, and many locally made Minoanizing and Matt painted Aeginetan ceramics were recovered together with imports from Crete and the Cyclades. Matt Painted pithoi, Aeginetan cooking ware of Minoan type and conical cups.
Activities	The fill assemblage points to feasting/dining.
Date	MH I–MH II (construction during ceramic phase H, fill assemblage ceramic phase I)
References	Gauss et al 2011
Illustration	After Gauss et al 2011, figure 2



E29b Kolonna Large Building Complex (phase 2)	
Preservation	Moderately preserved. Distortion because of Byzantine and late Roman activities. The building extended further east and west, but no excavations have taken place here.
Desertion	The final floor was exposed to fire, and covered by a thick layer of partly smashed and perhaps fire-exposed mud bricks and stones. The exterior eastern side of the walls also showed traces of fire. Therefore, it seems that the house was destroyed by fire.
Orientation	N–S
Lay-out	Rectangular, but with uncovered extensions towards the west. The three rooms presumably remained in existence in the main part of the building.
Size	Ca. 264 m ² (33 m long, but may have extended up to the MH fortification wall)
Walls	-
Modifications	-
Floor	At least 11 densely packed and superimposed floor horizons were identified.
Furnishings	-
Finds	A number of high quality vessels, including Cycladic stemmed and carinated bowls. Lid of Minoan stone vessels, several fragmented ceramics, and a bronze shoe-socketed spearhead on the uppermost floor.
Activities	-
Date	MH II–III (modification during ceramic phase H, final use ceramic phase J)
References	Gauss et al 2011
Illustration	After Gauss et al 2011, figure 2





E30 Kolonna Large Building Complex (phase 3)	
Preservation	Moderately preserved. Distortion because of Byzantine and late Roman activities. The interior is disturbed by later building activities and earlier excavations.
Desertion	Presumably deserted?
Orientation	N–S
Lay-out	Rectangular, seemingly four rooms. An entrance was probably located in the southern room.
Size	At least 160 m ² (23 x 7 m)
Walls	-
Modifications	Several floors were constructed.
Floor	Several floor horizons were identified
Furnishings	-
Finds	LH I ceramics. Solidly painted and burnished stemmed Aeginetan bowls and Aeginetan tripod cooking jars.
Activities	-
Date	MH III–LH II early (constructed during ceramic phase J, possibly in use till ceramic phase L).
References	Gauss et al 2011
Illustration	After Gauss et al 2011, figure 2




E31 Limani Pasa	
Preservation	Moderately preserved: parts of the northeastern, northwestern and internal partition wall were missing.
Desertion	Presumably deserted?
Orientation	NE–SW
Lay-out	Rectangular, with four partly partitioned sections.
Size	Ca. 62 m ² (8.80 x 7.00 m)
Walls	Simple walls made of roughly three stone rows. Ca. 0.60 m wide. Partition walls were smaller, ca. 0.40–0.70 m wide.
Modifications	-
Floor	The floor was made of white clay.
Furnishings	Along one of the walls two large pits were recovered which were paved with rough stones. Remains of a semi-circular hearth were recovered, and pits with traces of ash and sea animal remains, but these I could not identify in the plan. It was also unclear to me what the large grey area in the middle of the excavated area represented.
Finds	Many sherds and stone tools, also lead items. EC III like vessels; many storage vessels, Matt painted pithoid vessels, hydria, pithoi and grey Minyan cups and kantharoi with angular bodies, pedestalled goblets with plastic rings, Matt painted jars, jugs and kantharoi. Small finds such as obsidian coarse, flakes and blades, and flint blades, rubbers, millstones, and many sea animal remains and marine shells.
Activities	Perhaps an emphasis on storage, production and consumption?
Date	EH III–MH
References	Oikonomakou 1999; Oikonomakou 2010
Illustration	After Oikonomakou 1999, figure 3

E32 Palaioi Oropos	
Preservation	Moderately preserved, but only part of the northern section was uncovered.
Desertion	Presumably deserted?
Orientation	E–W
Lay-out	Seemingly rectangular, one or two partitioned rooms. Perhaps a corridor along the northern side of the house.
Size	Unclear, as no scale was published with the plan.
Walls	Two rows of larger stones with in between smaller stones. Sometimes a stone covered the whole width of the wall. The walls were ca. 0.50 m wide.
Modifications	-
Floor	-
Furnishings	Remains of three small cist graves are recovered in the area of the southern house. Perhaps these are the three grey features in the plan. It was unclear to me what the grey area in the middle of the house represented.
Finds	Remains of a decorated pithoid stamnos were found inside the southern house, indicating a LH I date. During the excavation, also remains of other vessels were recovered such as Grey Minyan, coarse household vessels, and monochrome closed vessels. Furthermore, small finds such as spindle whorls, obsidian and flint blades were among the finds and a lead component.
Activities	Presumably all household activities.
Date	MH III–LH I
References	Oikonomakou 2001
Illustration	After Archaeological Reports 2001 – 2002, figure 22

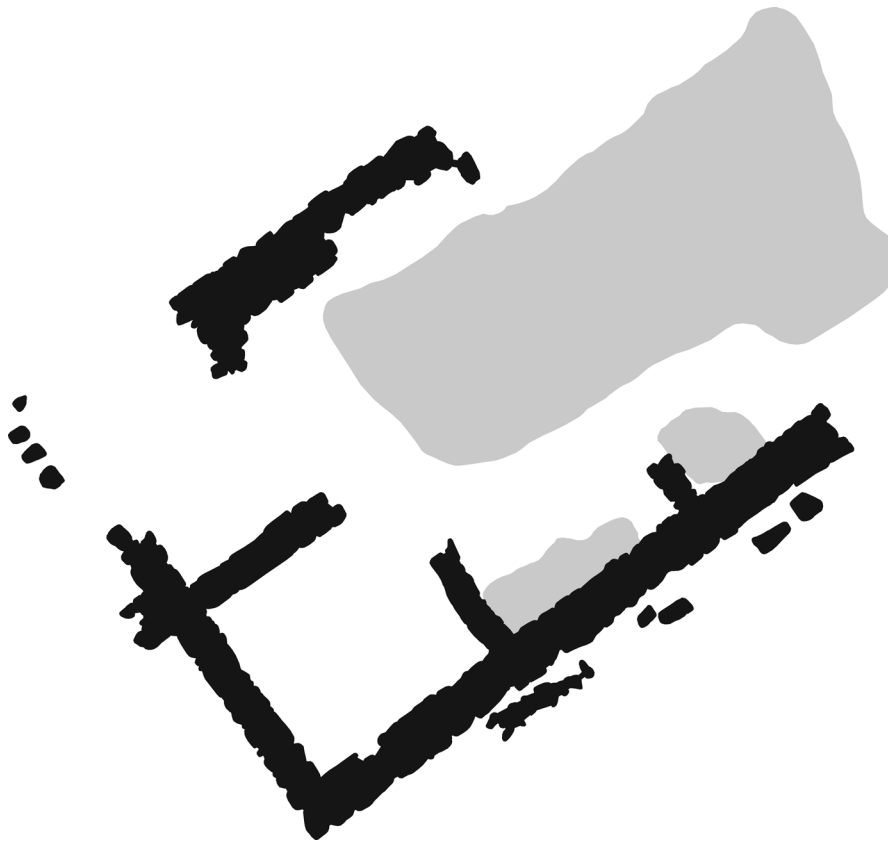


road

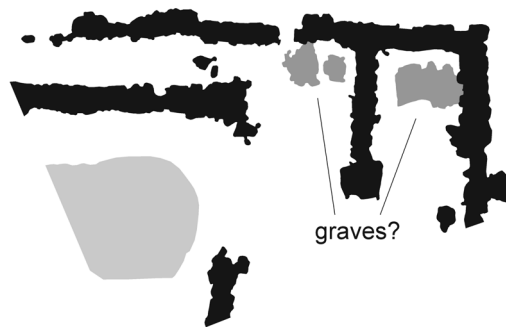

graves?



E33 Plasi	
Preservation	Poorly preserved. Most of the western section was not excavated.
Desertion	Unclear, as not details were published.
Orientation	NW–SE
Lay-out	Rectangular, at least 3 rooms. Perhaps a partly duplicated lay-out existed on the eastern side.
Size	Overall size, when width taken as 5.50: 76 m ² Room 1 south: ca. 1.65 x 5.50 m Room 2 centre: ca. 10.00 x unclear/5.50 m Room 3 north: ca. 2.20 x unclear/5.50 m
Walls	Heavy massive walls of stone
Modifications	-
Floor	-
Furnishings	In the centre of the main room was a concentration of stones. Perhaps this was the base of a hearth or the support of a column for the roof. Beneath the floor were cist graves, and north of the building were remains of a potter's kiln, and other industrial installations.
Finds	Among the ceramics were Minoan Kamares ware and Cycladic ceramics (perhaps from Melos).
Activities	Presumably all household activities.
Date	MH II or MH III (Kilian-Dirlmeier 1997: 112)
References	Marinatos 1970a and 1970b in AAA 3: 66 and 153-154; Petrakos 1996; Kilian-Dirlmeier 1997: 112
Illustration	After Petrakos 1996, figure 17

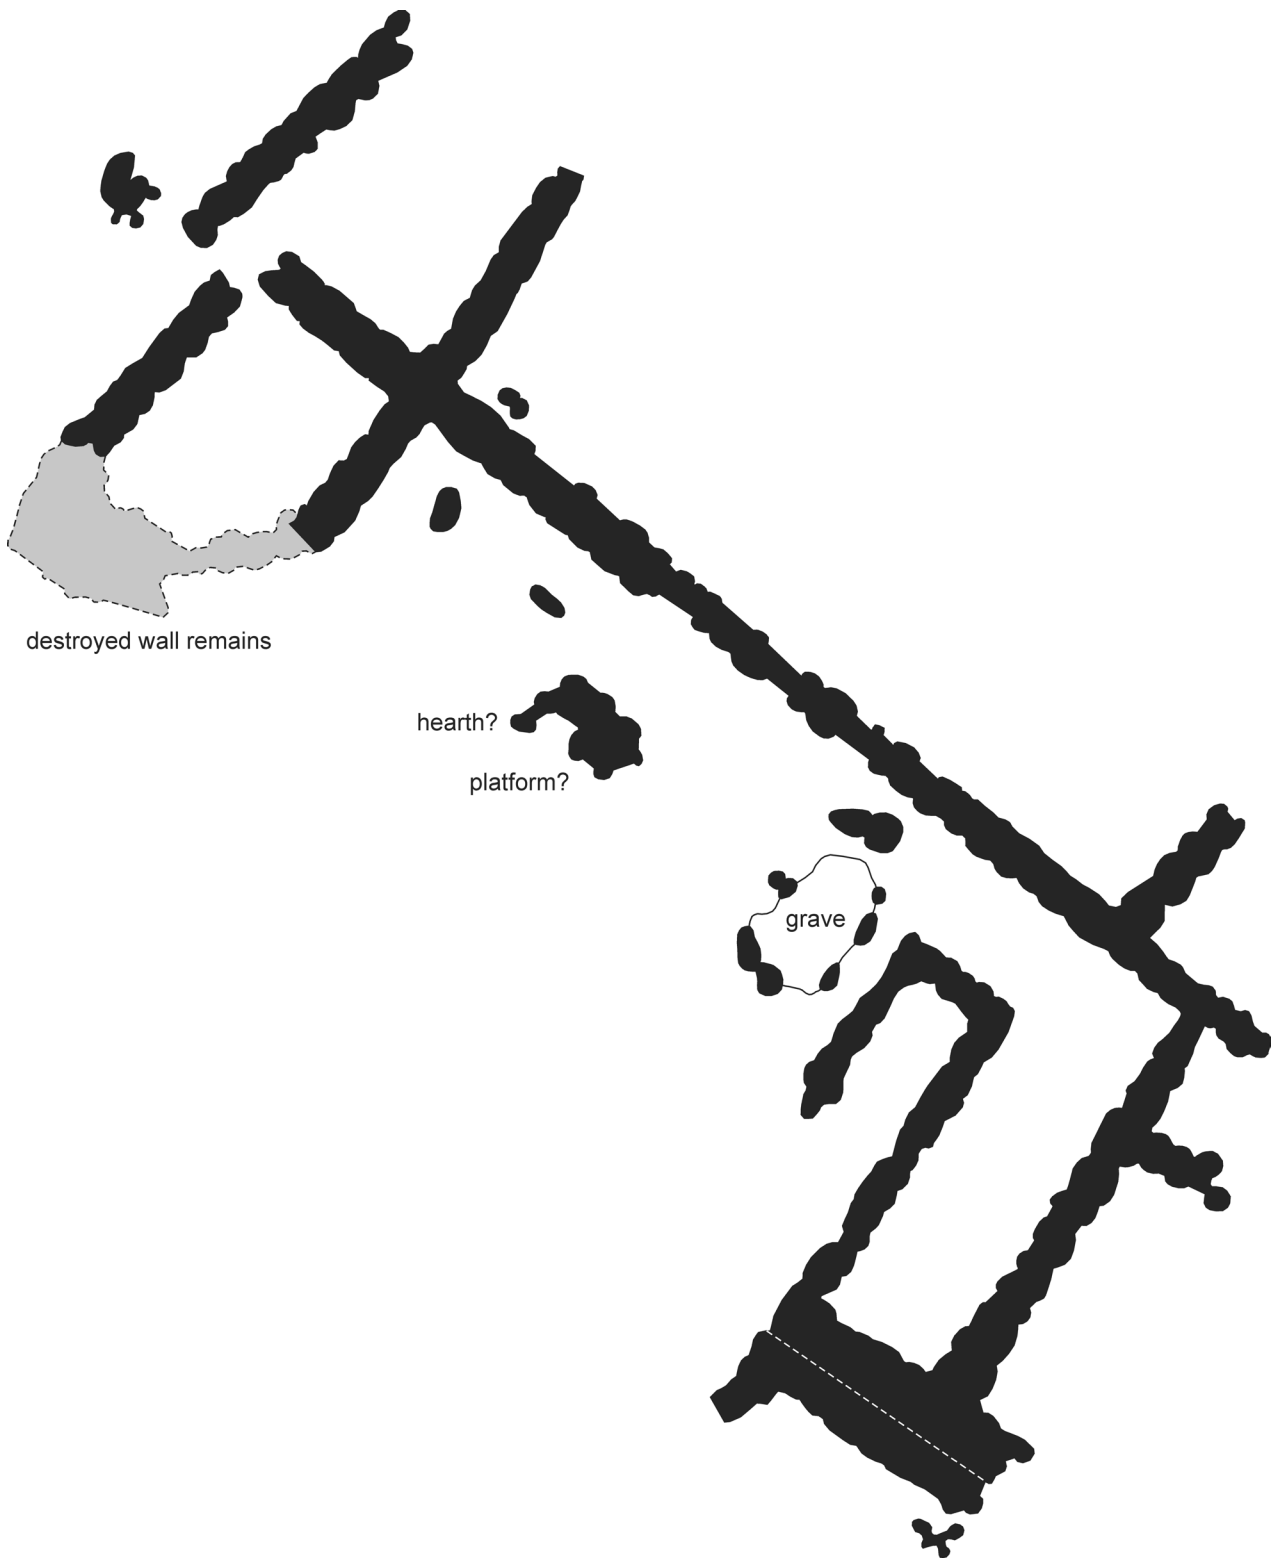

Catalogue F Corinthia

F01 Korakou house under house F	
Preservation	Reasonably preserved, but overbuilt by house F.
Desertion	Unclear, perhaps deserted and then overbuilt by house F.
Orientation	N–S, location of entrance is unclear.
Lay-out	Rectangular, seemingly three rooms
Size	Unclear, but the length of the different rooms from south to north is: 0.20, 2.35, and 2.15 m.
Walls	The walls were made of relatively large stones, placed haphazardly in two rows. Sometimes one large stone was used over the whole width. Sometimes a filling of smaller stones was used. Walls were ca. 0.45 m wide.
Floor	Hard earth floor
Furnishings	None mentioned
Modifications	-
Finds	Possibly Minyan pottery and a small coarse jar sunk in the south-eastern corner of the floor.
Activities	Unclear, possibly all domestic activities.
Date	MH I(–II)
References	Blegen 1921; Lambropoulou 1991
Illustration	After Blegen 1921, figure 110


F02 Korakou house F	
Preservation	Well preserved, only the north-western part of the apse was missing.
Desertion	Presumably deserted?
Orientation	N–S with the apse in the north and entrance in the south.
Lay-out	Apsidal, three rooms: an entrance, central room and partitioned apse.
Size	Overall size ca. 39 m ² Room 1: 2.00 x 3.85 m Room 2: 6.20 x 3.85 m Room 3: 1.85 x 3.85 m
Walls	Walls are made of smaller stones than in the case of the house under house F. It seems that two rows of stones were used to build the foundations, but it is hard to tell because the stones on the plan are filled in with lines to indicate their date. Walls are ca. 0.35–0.45 m wide. Ca. 0.30 m according to the publication, and reaching 0.20 m above the floor level.
Modifications	It is possible that there was at some time an entrance in the western sidewall. Here are two indentations that could have supported poles for the door.
Floor	Hard earthen pavement
Furnishings	A hearth towards the north-western corner, and part of a pavement made of clay and ashes. Two illustrated angular features near the hearth were not described. A pebble stone pavement was located in front of the entrance.
Finds	Among the finds were Minyan potsherds, and a small coarse pithos. Finds recovered in the layer associated with the floor of the house include Gray Minyan, Coarse ware and one Matt Painted sherd.
Activities	All domestic activities?
Date	MH I–II
References	Blegen 1921; Lambropoulou 1991
Illustration	After Blegen 1921, figure 110

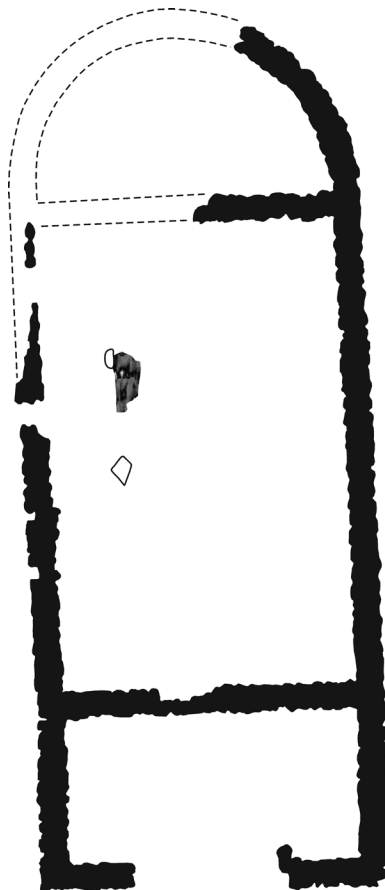

Fo3 Korakou structure B	
Preservation	Well preserved, only part of the south-western corner is missing.
Desertion	Presumably deserted?
Orientation	N–S, entrance in the southeast.
Lay-out	Rectangular, one room.
Size	Overall size ca. 6 m ² Interior dimensions: 3.90 x 1.50 m
Walls	Walls are made of smaller stones than in the case of the house under house F. It seems that two rows of stones were used to build the foundations, but it is hard to tell because the stones on the plan are filled in with lines to indicate their date. Walls are ca. 0.27 m wide.
Modifications	Five floor levels were identified, of which the lowest one was at a lower level than the house walls. This first floor was therefore not associated with house B. The second floor was associated with MH sherd material, while the three subsequent floors included some Mycenaean material, .
Floor	Floor of beaten earth.
Furnishings	-
Finds	Three Minyan sherds and two coarse ware sherds.
Activities	Probably an auxiliary building to house F.
Date	MH I–II
References	Blegen 1921; Lambropoulou 1991
Illustration	After Blegen 1921, figure 110



Fo4 Korakou MH house	
Preservation	Seemingly well preserved, but only partly uncovered.
Desertion	Unclear
Orientation	N–S with apse in the south. Though excavators suggest E–W with apse in the west.
Lay-out	Apsidal, unclear how many rooms, but it seems at least two as the apse was partitioned.
Size	Unclear, as the house was only partially uncovered.
Walls	The walls were made of two stone rows and ca. 0.45 m wide.
Modifications	-
Floor	The floor was dug through by the excavators because they thought it did not go with the walls. As such, no description was published of the floor.
Furnishings	-
Finds	-
Activities	Unclear, due to lack of data.
Date	Probably MH
References	Blegen 1921; Lambropoulou 1991
Illustration	After Blegen 1921, Plate VIII

Fo5 Tsoungiza apsidal house	
Preservation	Poorly preserved: disturbed by ploughing, partly built upon by house E.
Desertion	Presumably deserted and subsequently built upon by house E.
Orientation	N–S with apse in the south and entrance presumably in the north.
Lay-out	Apsidal. The house consisted probably of at least two rooms.
Size	Overall size ca. 21 m ² (estimation based on reconstruction drawing).
Walls	Irregular sized and placed stones. It was sometimes possible to discern two rows of stones. Width of the walls was ca. 0.60–0.80 m.
Modifications	-
Floor	-
Furnishings	Two pits
Finds	-
Activities	All household activities?
Date	EH III: 1
References	Pullen 2011b
Illustration	After Pullen 2011b, figure 6.18

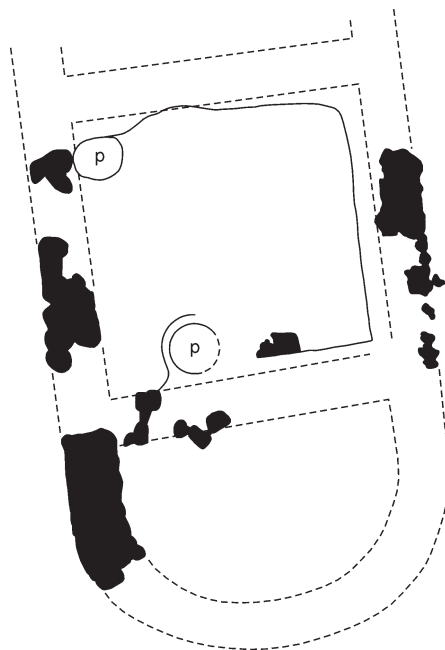


Fo6 Tsoungiza house C	
Preservation	Poorly preserved
Desertion	Destroyed by fire.
Orientation	NW–SE, entrance in the SE
Lay-out	Unclear, because the northern side of the house was not preserved.
Size	Ca. 4.10 m in width
Walls	Ca. 0.25–0.35 m in width. Only one or two courses high, ca. 0.30 m in height.
Modifications	-
Floor	A layer of white clay, ca. 0.15 m below the top of the walls.
Furnishings	Pivot along the south-eastern wall. A pit filled with burned earth, at the bottom was a large stone. It seems that outside the house there was a cooking area, consisting of a hearth, burned beans, cooking pots / wide mouthed jars, a fragmentary pithos, a pattern painted kantharos, a flat-based cup, a tankard, and supposedly a pot support and a burnished pyxis.
Finds	Debris in the house included numerous pieces of charred wood, flint and obsidian blades, remains of probably two bass bowls or wide mouthed jars. A large pithos was set in the floor. On the floor fragments of pottery, including remains of a pedestal-footed cup, and pieces of a terracotta mould. In the mould's surface were two depressions for axes or chisels. On the floor, also a number of fired mud bricks were found. The mud bricks measured 0.27 m in length, and 0.07–0.075 m in thickness.
Activities	All household activities?
Date	EH III: 2–3
References	Pullen 2011b
Illustration	After Pullen 2011b, figure 6.04

Fo7 Tsoungiza house E	
Preservation	Almost completely preserved.
Desertion	Destroyed by fire.
Orientation	N–S, with apsidal corner in the north-west, and entrance in the southwest.
Lay-out	Irregular apsidal, one room.
Size	Ca. 13 m ² , but the floor space was reduced to 10 m ² , due to all the pithoi. East-west: 2.40–3.90 m North-south: 4.40–4.70 m
Walls	Width 0.30–0.45 m
Modifications	-
Floor	Hard packed white 'clay' / local marl
Furnishings	-
Finds	Fragments of presumably two Bass bowls, six bowls, three cups, a jug, a cup, nine pithoi (of which eight (!) were in situ recovered in the house), two pyxides and two tankards. Worked bone, boar tusk, sheep and wild boar bones, animal bones, bone awl. Terracotta idol (?). Four stone blades, stone pounder, nine grinding stones, whetstone, stone celt, ornament, slab, spindle whorls, flat tapering object and piece of flint or obsidian. Organic remains of seeds, beans, acorns and peas.
Activities	Storage, grinding of wheat and food processing.
Date	EH III: 2–3
References	Pullen 2011b
Illustration	After Pullen 2011b, figure 6.10

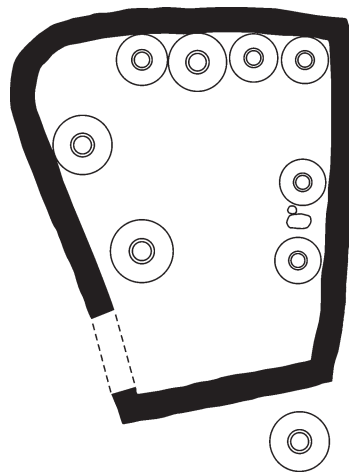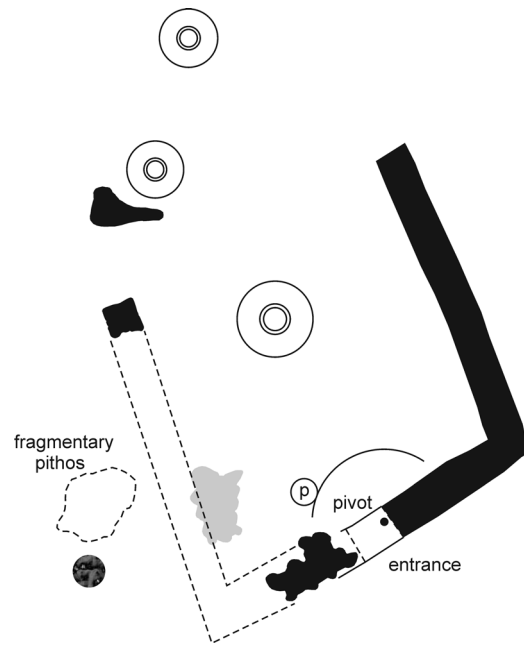

Fo8 Tsoungiza West building south-western side	
Preservation	Reasonably preserved, part of a wall was robbed out.
Desertion	The house was destroyed by fire.
Orientation	NW–SE, entrance in the SE
Lay-out	Rectangular, three rooms, and two attached side rooms.
Size	Ca 40+ m ²
Walls	Irregular laid foundations. Large and small stones were used. Sometimes it was possible to discern two rows, but often not. The foundations were ca. 0.60 m wide
Modifications	Reconstructed as the north-eastern west building, after the fire destruction.
Floor	The southern side of the main room was cobbled. The back room also had a cobbled surface.
Furnishings	Remains of a hearth and stone slab were uncovered in the central room.
Finds	Main room: Matt Painted goblet, three unpainted kantharoi, unpainted dipper, two unpainted jugs with cut-away necks, and two unpainted cooking pots. Side room: A Matt Painted teacup, miniature? jar, four handled jar, a Light on Dark jug an unpainted dipper, goblet, miniature kantharos, krater and alabastron Back room: Cooking pot
Activities	Eating, drinking, storage and cooking.
Date	LH I
References	Rutter 1989, Wright 1990, Dabney and Wright forthcoming
Illustration	After Rutter 1989, figure 2



Fo9 Tsoungiza West building north-eastern side	
Preservation	Reasonably preserved, part of a wall was robbed out.
Desertion	Deserted.
Orientation	NW–SE, entrance in the SE
Lay-out	Rectangular, four rooms
Size	Ca. 28+ m ²
Walls	Irregular laid foundations. Large and small stones used. Sometimes it was possible to discern two rows, but often not. The foundations were ca. 0.45 m wide
Modifications	The house went through several periods of modifications, before its abandonment during LH IIA.
Floor	A cobbled surface was located along the southern half of the main room. The surfaces of the other rooms were not discussed, except that rising of a floor had taken place in one of the back rooms.
Furnishings	Remains of two hearths and a stone slab in the central room. Hearths were also located in both small middle rooms.
Finds	Cooking pot in the small side room with a sheep skeleton. On the other side remains of garlic.
Activities	Cooking, storage and presumably all other household activities.
Date	LH I. Abandoned at the end of LH I.
References	Rutter 1989, Wright 1990, Dabney and Wright forthcoming
Illustration	After Rutter 1989, figure 2

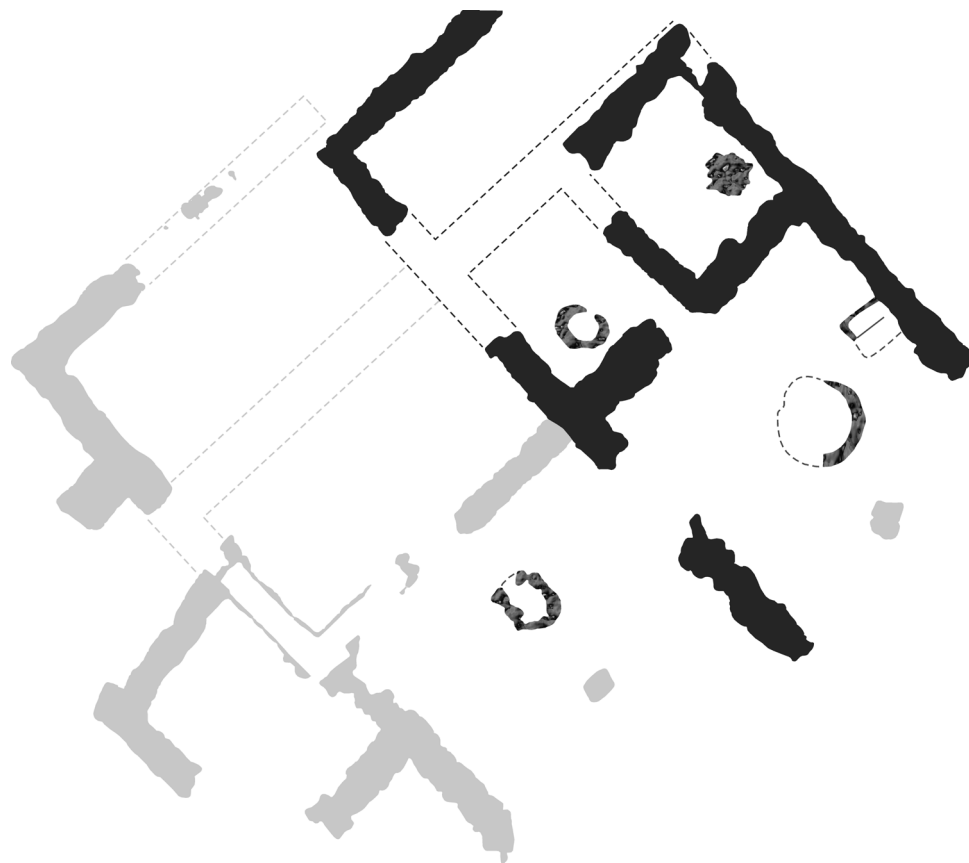

Catalogue G Argolid


Go1 Argos house MA	
Preservation	Moderately preserved
Desertion	Unclear, but it is overbuilt during the next period by house MD.
Orientation	NE-SW
Lay-out	Apsidal, at least one apse and a main room
Size	Apse: 3.05 x 5.40 Main room: 5.30+ x 5.40 Total size is 45m ² +
Modifications	It is unclear whether the grey north-western wall is an older wall or a reinforcement.
Date	MH IIIA
References	Touchais and Philippa-Touchais 1997
Plan	Touchais and Philippa-Touchais 1997, Fig 1

Go2 Argos house MB	
Preservation	Poorly preserved
Desertion	Unclear, but it is overbuilt during the next period by house MD.
Orientation	NW-SE
Lay-out	Rectangular, probably one room
Size	1.70+ x 2.50 = 4.25+ m ²
Date	MH IIIA
References	Touchais and Philippa-Touchais 1997
Plan	Touchais and Philippa-Touchais 1997, Fig 1

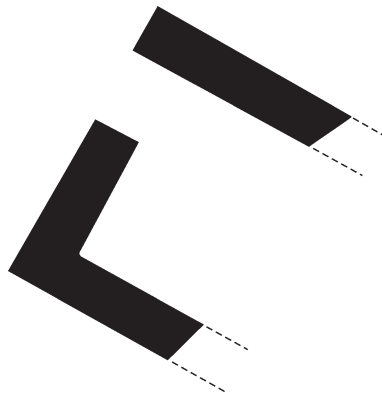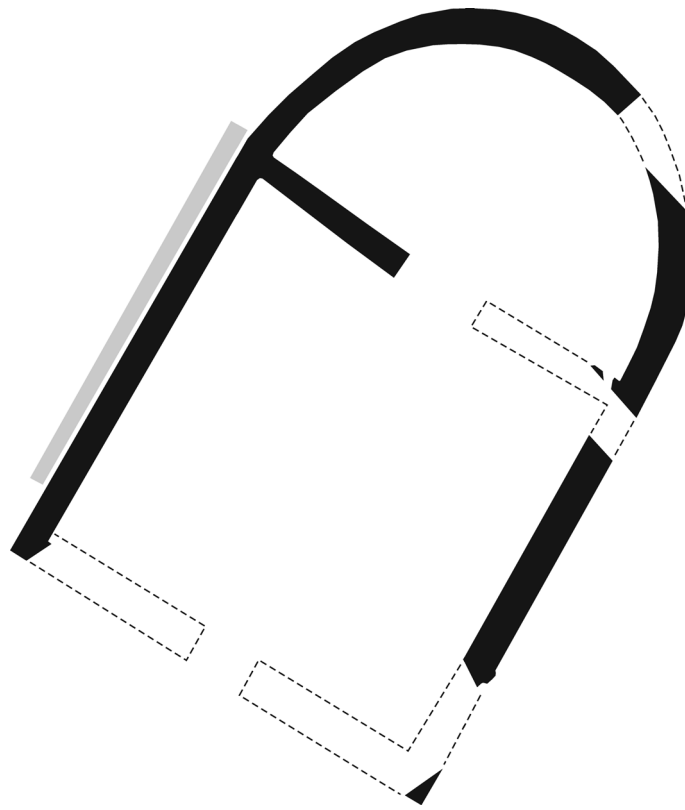


Go3 Argos house MC	
Preservation	Poorly preserved
Desertion	Unclear, but it is partly overbuilt during the next period by house ME
Orientation	NW-SE
Lay-out	Probably rectangular, seemingly two rooms and an entrance area.
Size	Entrance area and room 1 have a length of 2.80 m and unclear width The main room is 14+ m. In the reconstructed settlement plan, this room is partitioned into two rooms, but there seems to be no evidence for a partition wall.
Modifications	The eastern part of the house may date to MH I-II (Voutsaki et al 2006)
Date	MH IIIA
References	Touchais and Philippa-Touchais 1997
Plan	Touchais and Philippa-Touchais 1997, Fig 1


Go4 Argos house MD	
Preservation	Poorly preserved.
Desertion	Unclear
Orientation	NE-SW
Lay-out	Rectangular, three rooms
Size	Room 1: 2.80 x 3.90 Room 2: 7.60 x 4.20 Room 3: 1.95 x 4.50 Total size: 51.60 m ²
Date	MH IIIB
References	Philippa-Touchais 2010
Plan	Philippa-Touchais 2010, Fig. 10

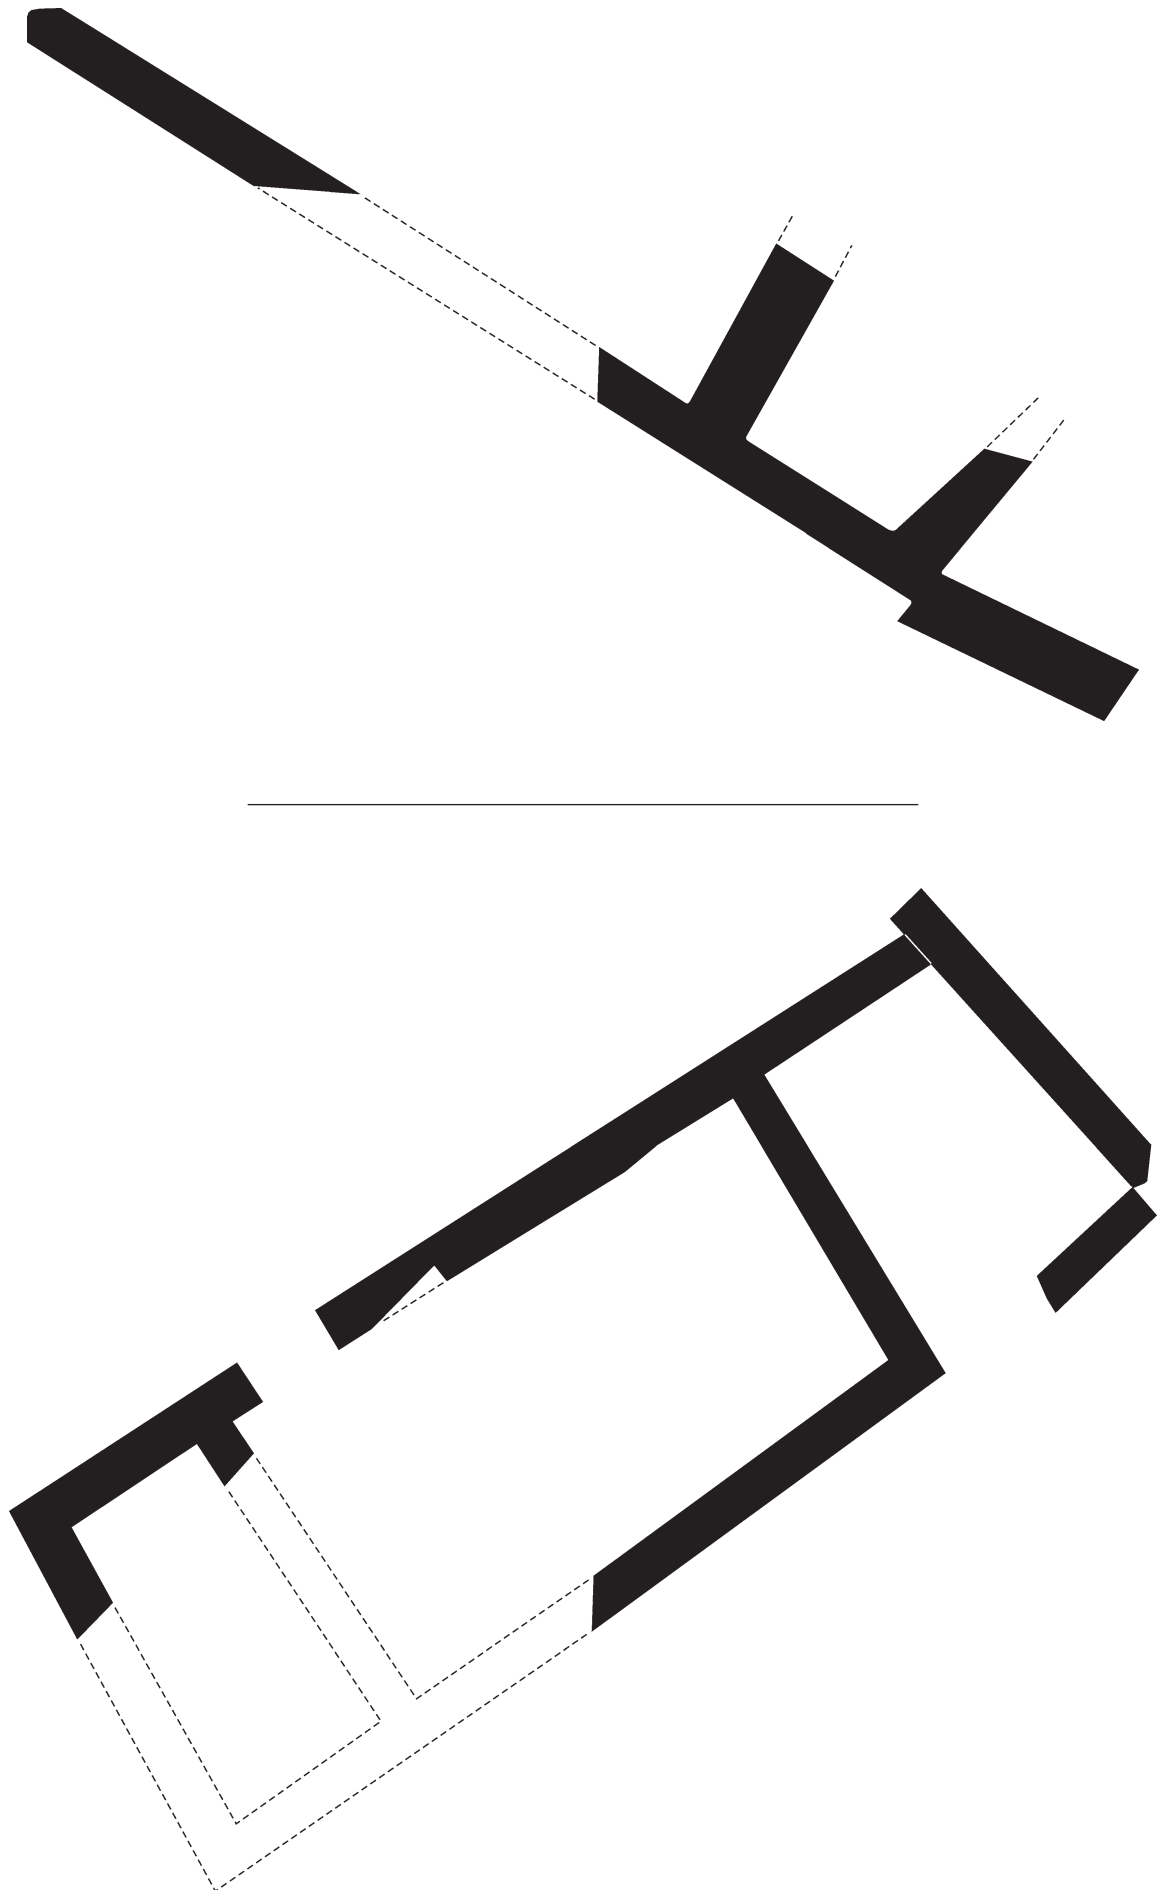


Go5 Argos house ME	
Preservation	Poorly preserved.
Desertion	Unclear
Orientation	NE-SW
Lay-out	Rectangular, three rooms
Size	Room 1: 2.52 x 4.50 Room 2: 7.84 x 4.50 Room 3: 2.24 x 4.50 Total size: 56.70 m ²
Date	MH IIIB
References	Philippa-Touchais 2010
Plan	Philippa-Touchais 2010, Fig. 10

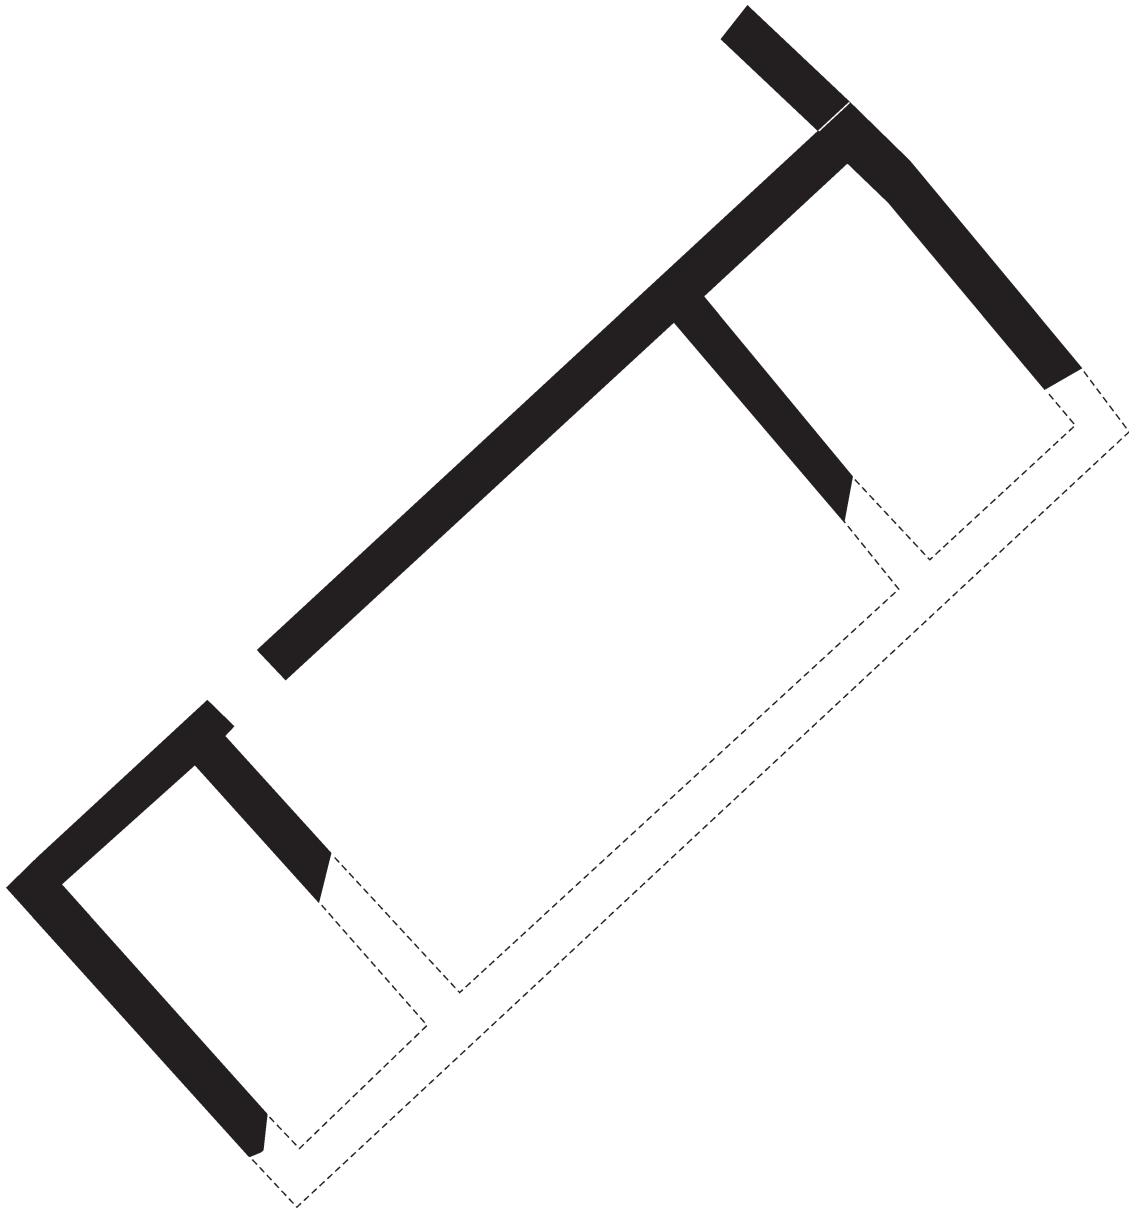


Go6 Argos house MI	
Preservation	Poorly preserved.
Desertion	Unclear
Orientation	N-S
Lay-out	Rectangular, at least two rooms
Size	Room 1: 2.50 x 5.00 Room 2: 7.40 x 4.70 Total at least: 47.30 m ²
Date	MH IIIB
References	Philippa-Touchais 2010
Plan	Philippa-Touchais 2010, Fig. 10

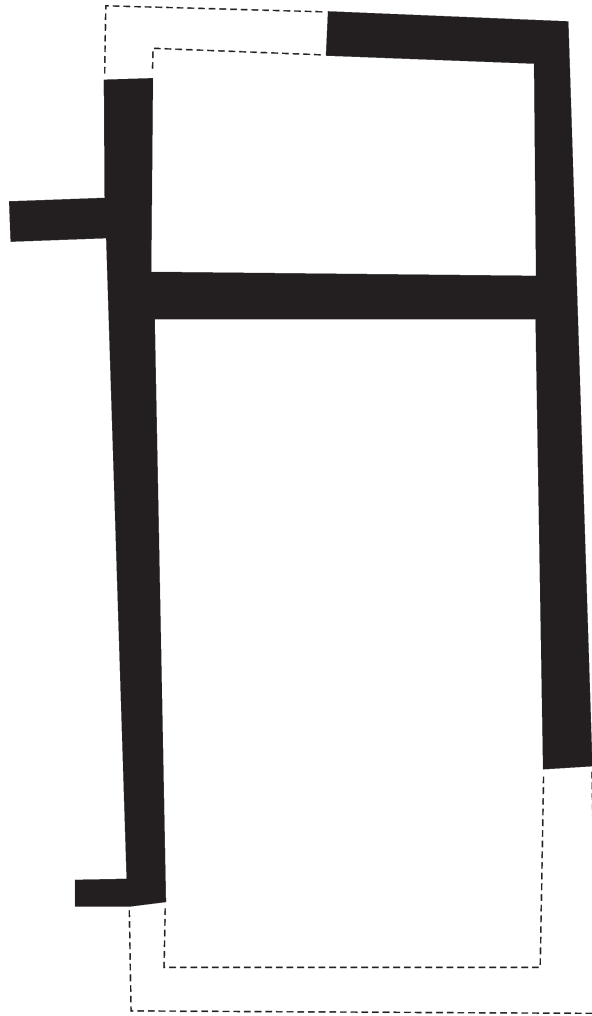


Go7 Argos house MJ	
Preservation	Poorly preserved.
Desertion	Unclear
Orientation	NW-SE
Lay-out	Rectangular, seemingly or at least one room
Size	$6.2+ \times 4.7 = 29.10+ \text{ m}^2$
Date	MH IIIB
References	Philippa-Touchais 2010
Plan	Philippa-Touchais 2010, Fig. 10

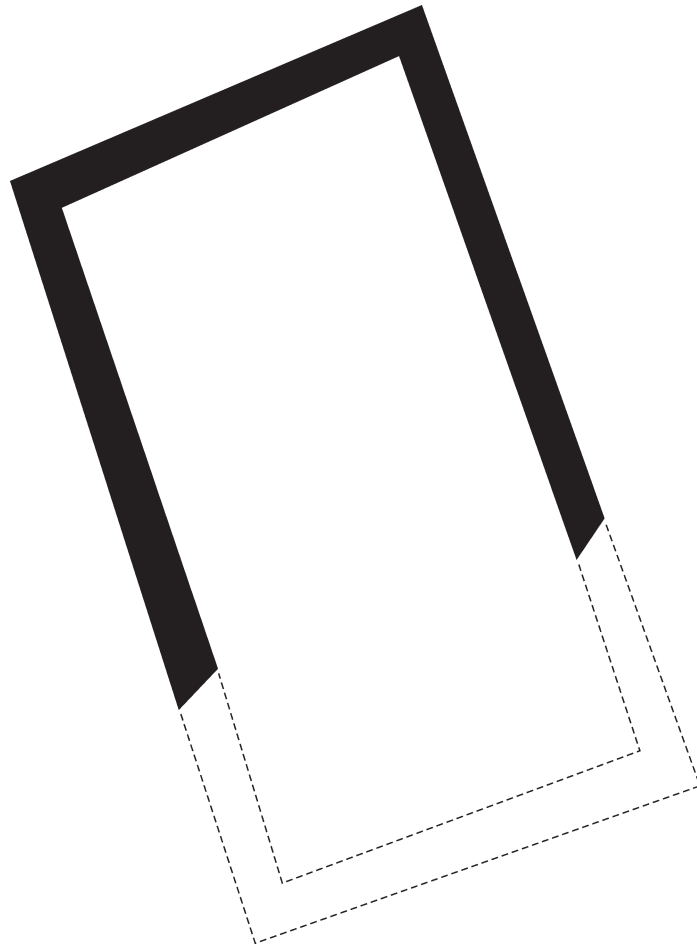

Go8 Argos house B	
Preservation	Moderately preserved.
Desertion	Unclear
Orientation	NW-SE
Lay-out	Rectangular, at least one room, with a possible porch.
Size	9.90 x 4.30 = 42.60 m ² , and perhaps even larger
Date	MH IIIB
References	Philippa-Touchais 2010
Plan	Philippa-Touchais 2010, Fig. 10

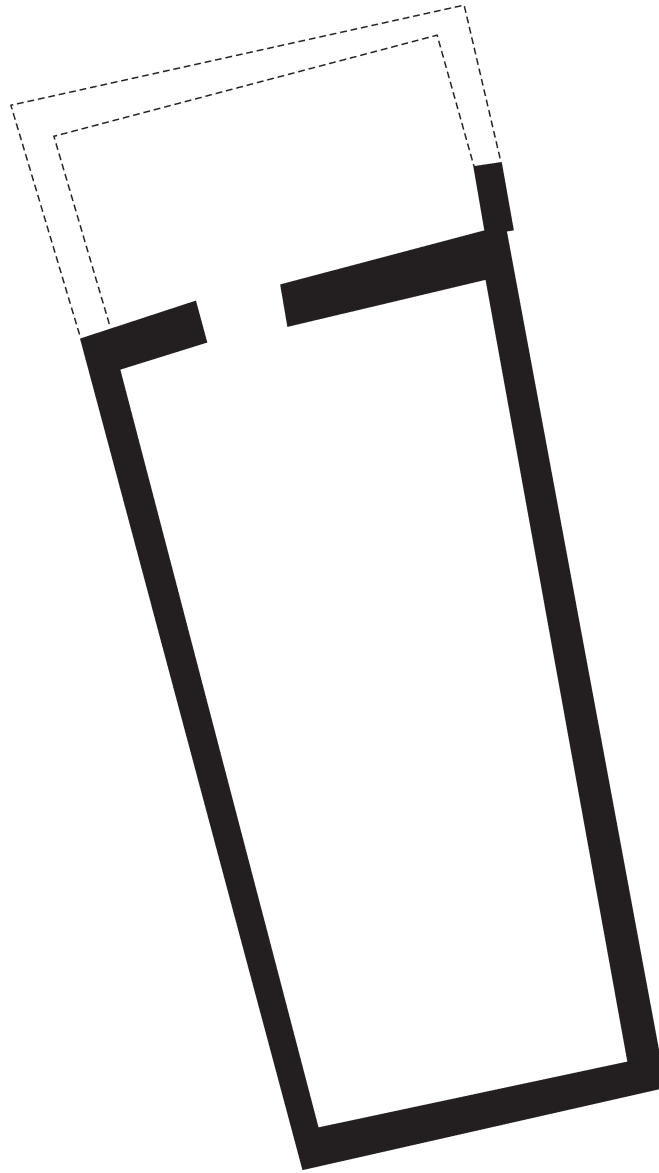


Gog Argos house CD	
Preservation	Poorly preserved,
Desertion	Unclear
Orientation	N-S
Lay-out	Rectangular, at least three room.
Size	Southern room: 1.60 x 3.70 Northern room: 6.20+ x 3.70 Area C: 4.50 x 3.40 Uncovered for at least 44.10 m ²
Date	MH IIIB
References	Philippa-Touchais 2010
Plan	Philippa-Touchais 2010, Fig. 10

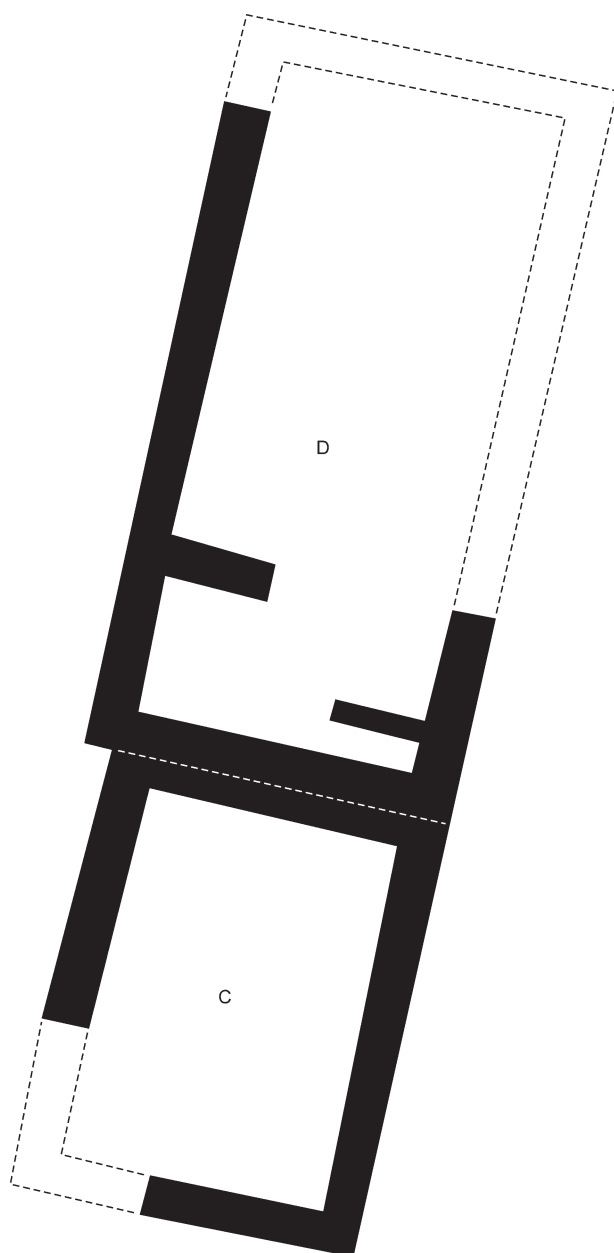


G10 Argos house E	
Preservation	Moderately preserved
Desertion	Unclear
Orientation	W-E
Lay-out	Rectangular, four rooms.
Size	Room 1: 2.50 x 3.10 Room 2: 4.30 x 2.80 Room 3: 4.30 x 2.80 Room 4: 2.80 x unclear Total size: 31.90+ m ²
Date	MH IIIB
References	Philippa-Touchais 2010
Plan	Philippa-Touchais 2010, Fig. 10


G11 Argos house F	
Preservation	Poorly preserved
Desertion	Unclear
Orientation	W-E
Lay-out	Rectangular, seemingly two or three rooms
Size	Room 1: 0.90 x unclear Room 2: 5.00 x unclear Room 3: 2.20 x 3.10 Total size at least: 6.80 + m ²
Date	MH IIIB
References	Philippa-Touchais 2010
Plan	Philippa-Touchais 2010, Fig. 10

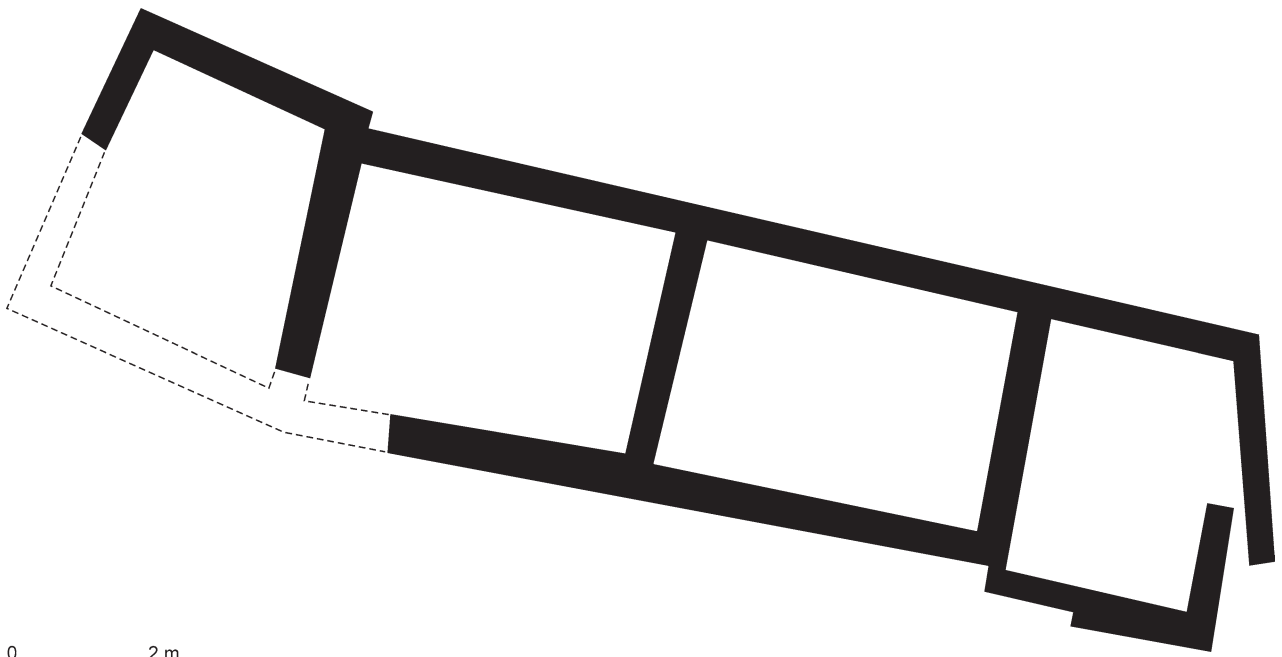


0 2 m

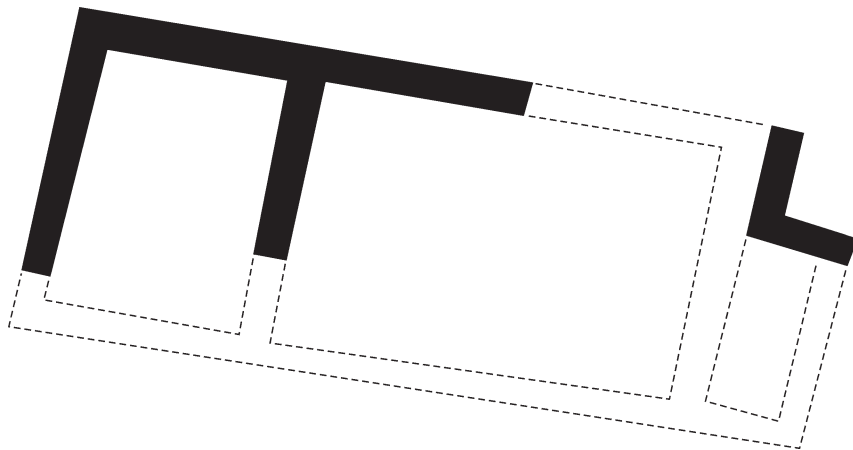


G12 Argos house H	
Preservation	Poorly preserved
Desertion	Unclear
Orientation	NE-SW
Lay-out	Rectangular, seemingly three rooms or two rooms and a court area?
Size	Room 1: 1.40 x 2.80 Room 2: 6.20+ x 3.10 Room 3/court area: unclear Total size at least: 23.10+ m ²
Date	MH IIIB
References	Philippa-Touchais 2010
Plan	Philippa-Touchais 2010, Fig. 10

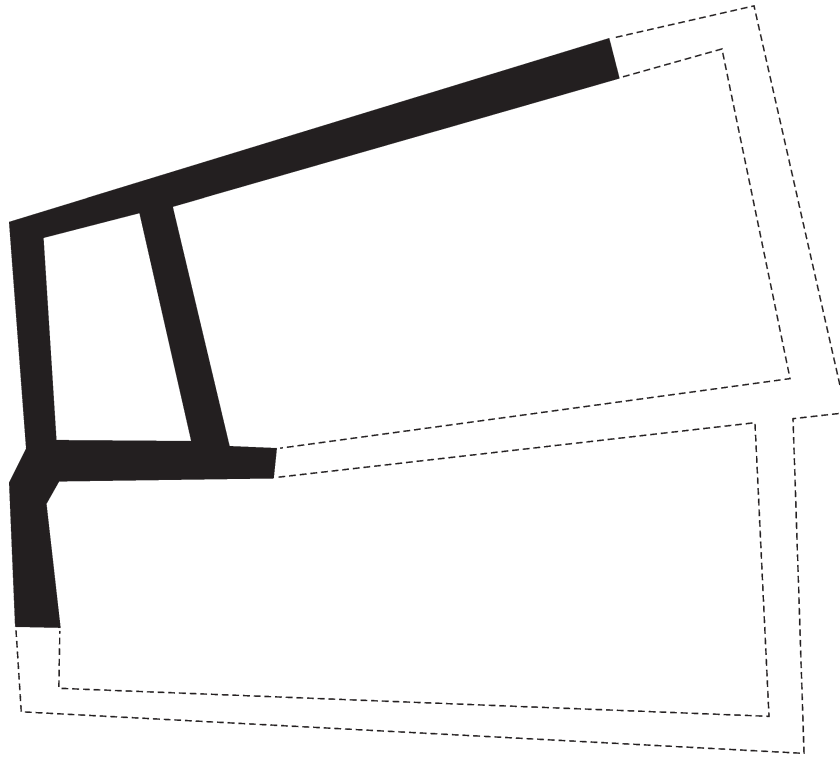

G13 Argos house N	
Preservation	Moderately preserved
Desertion	Unclear
Orientation	NW-SE
Lay-out	Rectangular, three rooms
Size	Room 1: 2.50 x 5.00 Room 2: 9.60 x 4.70 Room 3: 3.10 x 4.70 Total size: 72.20 m ²
Date	MH IIIB
References	Philippa-Touchais 2010
Plan	Philippa-Touchais 2010, Fig. 10


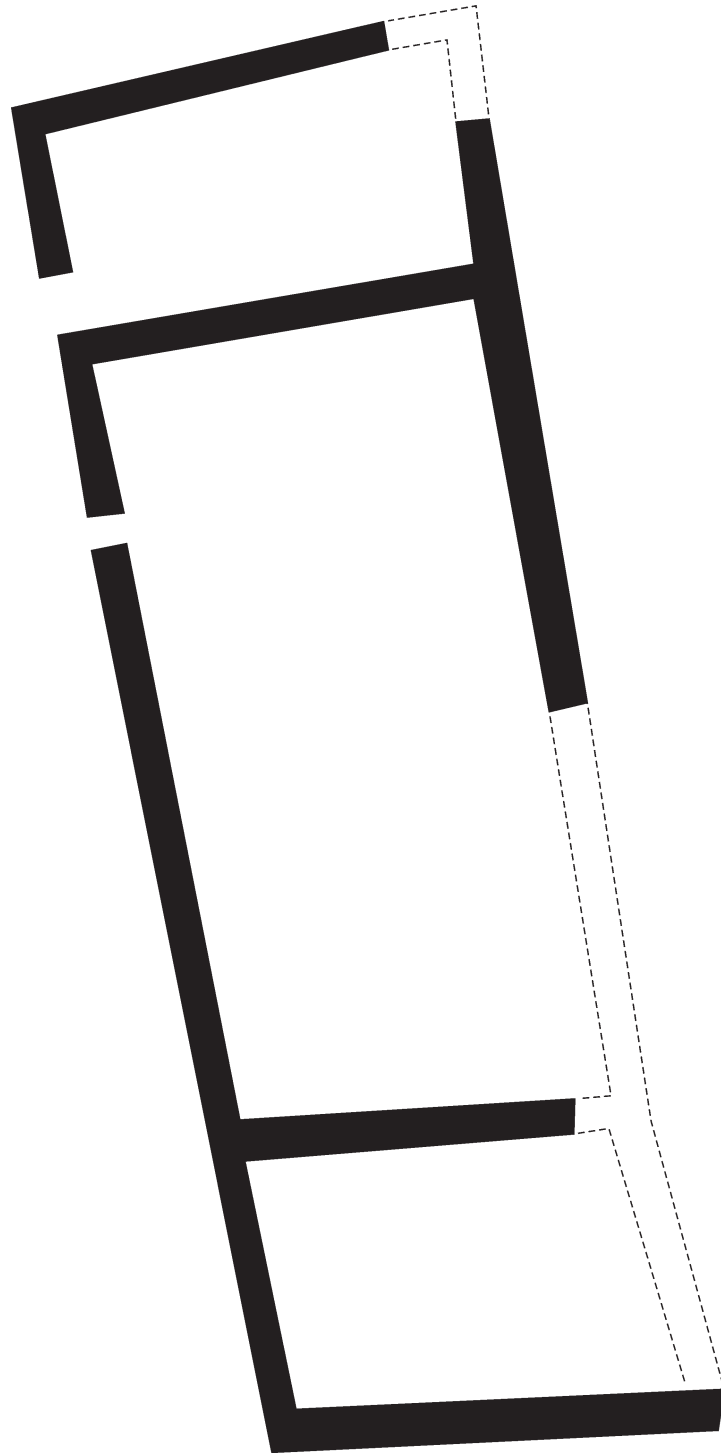


G14 Argos house O	
Preservation	Moderately preserved
Desertion	Unclear
Orientation	N-S
Lay-out	Rectangular, at least two rooms
Size	Room 1: 2.80 x 4.70 Room 2: 9.30+ x 4.30 Total size: 53.20+ m ²
Date	MH IIIB
References	Philippa-Touchais 2010
Plan	Philippa-Touchais 2010, Fig. 10

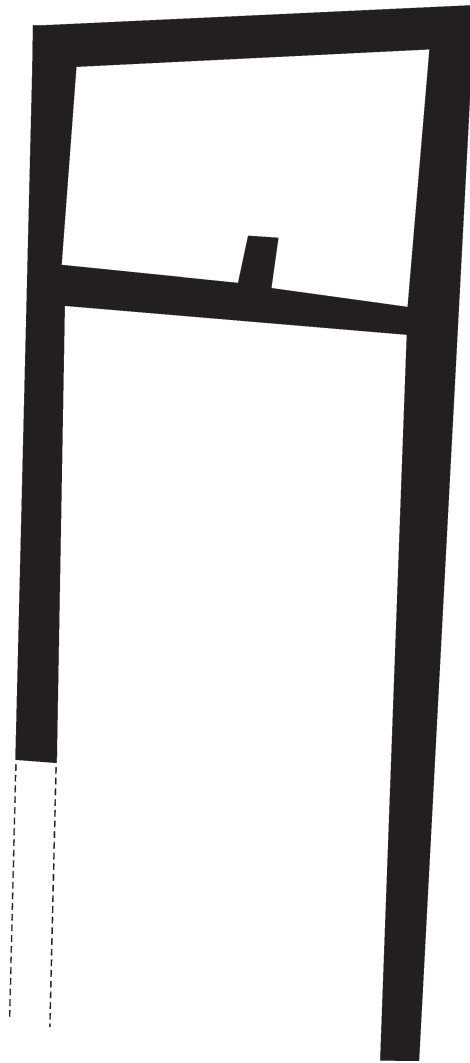



G15 Argos house P	
Preservation	Moderately preserved
Desertion	Unclear
Orientation	NE-SW
Lay-out	Rectangular, four rooms
Size	Room 1: 3.70+ x 4.30 Room 2: 4.30 x 4.30 Room 3: 1.60 x 2.50 Room 4: 2.50 x 2.50 Total size: 44.7+ m ²
Date	MH IIIB
References	Philippa-Touchais 2010
Plan	Philippa-Touchais 2010, Fig. 10

G16 Argos house Q	
Preservation	Poorly preserved
Desertion	Unclear
Orientation	NE-SW
Lay-out	Rectangular, at least two rooms (though Philippa-Touchais (2010) reconstructs three rooms)
Size	Room 1: 6.20+ x 3.10 Room 2: 2.50 x 3.10 Total size 27+ m ²
Date	MH IIIB
References	Philippa-Touchais 2010
Plan	Philippa-Touchais 2010, Fig. 10

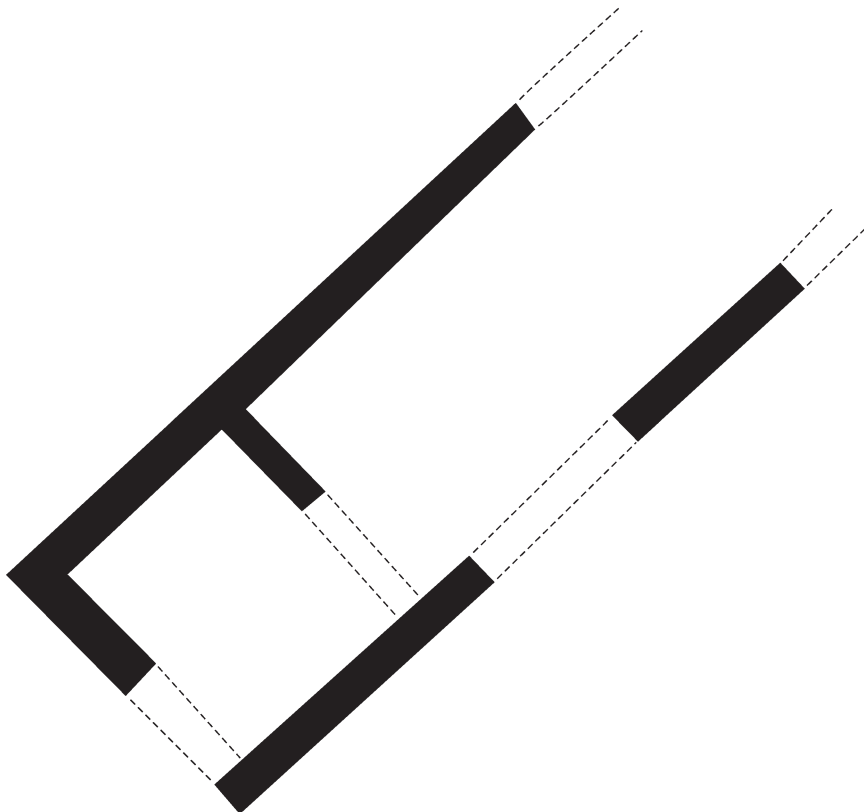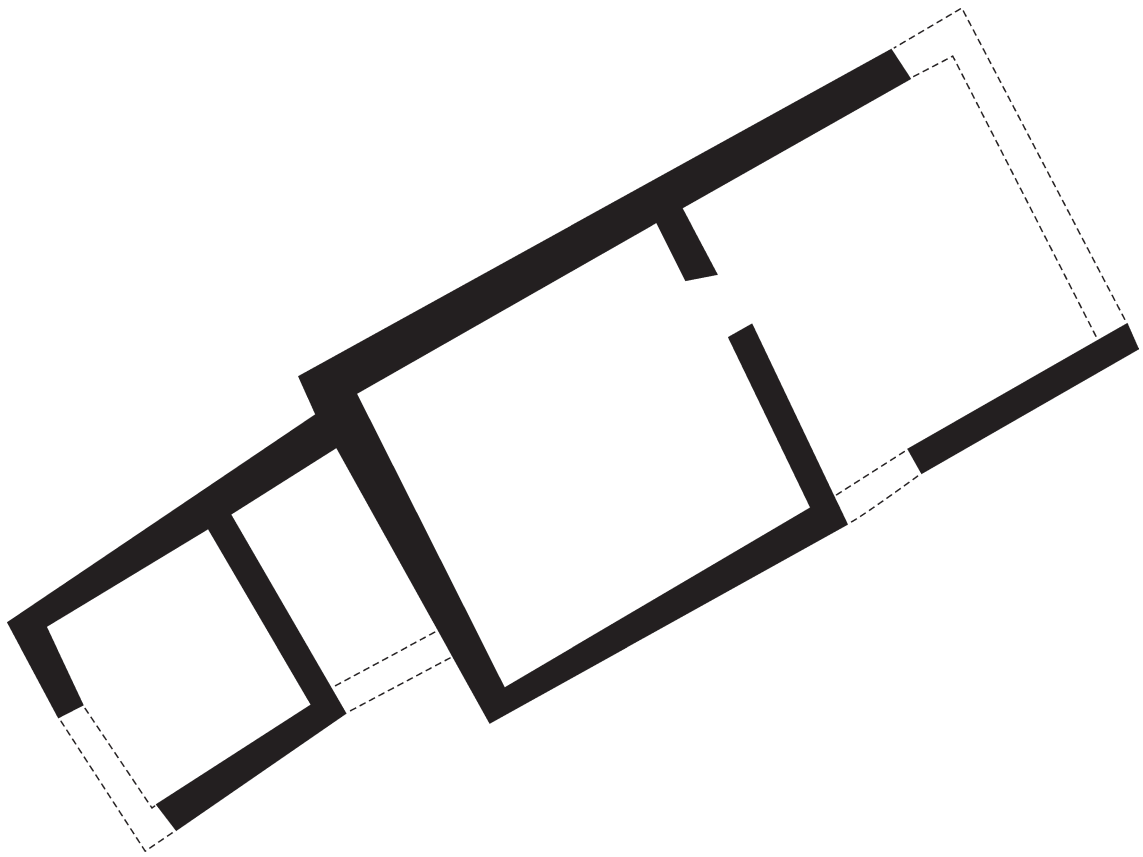



G17 Argos house e	
Preservation	Moderately preserved
Desertion	Unclear
Orientation	NE-SW
Lay-out	Rectangular, three rooms.
Size	Room 1: 5.00 x 4.00
	Room 2: 5.00 x 4.00
	Room 3: 5.00 x 4.00
	Total size: 60.00 m ²
Date	MH IIIB
References	Philippa-Touchais 2010
Plan	Philippa-Touchais 2010, Fig. 10

G18 Argos house at Tzafa plot	
Preservation	Reasonably preserved, disturbances in north-eastern section of the trench.
Desertion	The house remains were well preserved, so perhaps the house was deserted and not destroyed by some cause.
Orientation	N-S, unclear where the entrance is.
Lay-out	Rectangular, two large rooms A and B, with a small partitioned section C in or near room B.
Size	Room A: 3.90 x 2.80
	Room B: 4.30 x 2.80
	Room C in room B: 0.77 x 0.63
	Overall ca. 23 m ² .
Walls	Generally: two rows of large stones, with smaller stones in between. Ca. 0.50-0.60 m wide
Modifications	None mentioned, but only preliminarily published. It is unclear to me whether the grey walls are contemporary with the house, and whether they are part of the construction or internal furnishings.
Floor	It seems that the floor is partly paved, and made of stamped clay.
Furnishings	Ellipsoid hearth in room A along the eastern wall.
Finds	Only a few finds are published, among them are a few pieces of Grey and Black/Argive Minyan, a small jug/jar, a cup with pedestalled foot, a cooking pot, a coarse conical cup, sherds of a Matt Painted hydria and a Matt Painted closed vessel.
Activities	Eating, drinking, cooking, storage, presumably all household activities.
Date	MH III-LH I
References	Divari-Valakou 1998
Plan	Divari-Valakou 1998

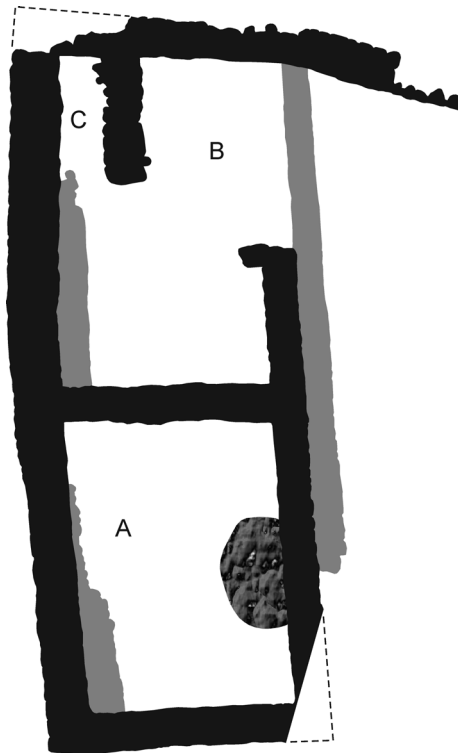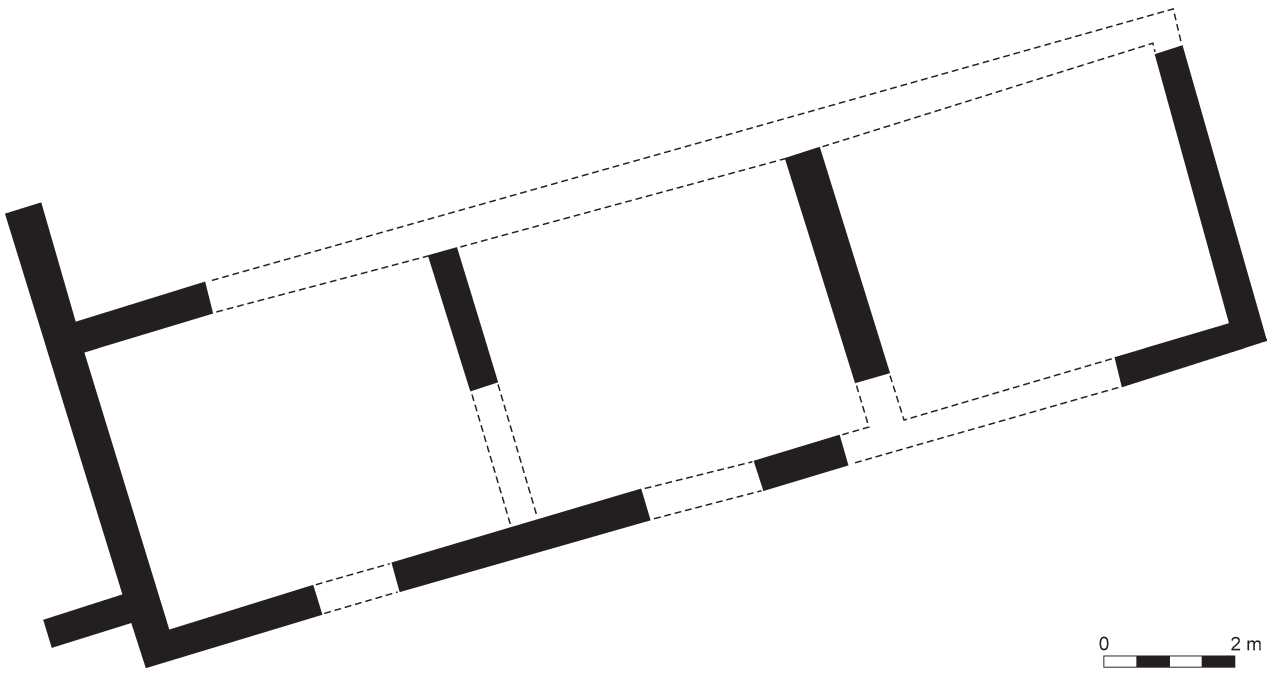



G19 Asine house S	
Preservation	Poorly preserved, only part of the centre of the house was uncovered.
Desertion	Deserted? The remains were partly destroyed, perhaps due to the construction of house T.
Orientation	NW-SE, across the terrace
Lay-out	Rectangular (?), at least two rooms
Size	32+ m ² (8.00 x 4.00)
Walls	0.50-0.60 m wide, and 1-2 courses high preserved.
Modifications	None mentioned
Floor	Not described
Furnishings	An EH III bothros below the partition wall.
Finds	South room IV: pithos and in the pithos a jug. Under the pithos remains of a hydria North room V: a Matt Painted jug and a Solidly Black Painted bowl Uncertain provenance: two terracotta whorls, obsidian flakes and blades
Activities	Storage and presumably other household activities such as weaving, eating and drinking
Date	EH III–MH I
References	Nordquist 1987
Plan	Nordquist 1987, Fig. 10

G20 Asine house T	
Preservation	Reasonably well preserved.
Desertion	Deserted? Partly overbuilt by house U.
Orientation	NW-SE, unclear where the entrance was located.
Lay-out	Rectangular, two rooms, of which one was partly partitioned in the length. Perhaps part of the house functioned as a basement, in that case the lengthwise partitioning could have supported the upper floor, or a staircase.
Size	According to Norquist 50 m ² (10.00 x 5.00), but these seem outer measurements. However, an internal size of ca. 31 m ² of the lower floor seems more likely. The upper floor might have had a similar size. Room VI: 23.10 m ² (5.80-6.10 x 3.85) Room VIA: 8.5 m ² (6.10 x 1.40) Room VIB: 10.15 m ² (5.80 x 1.75) Room VII: 7.50 m ² (2.50 x 3.00)
Walls	0.45-1.00 m wide, and 6+ courses high (1.40 m) preserved. Constructed with large to very large boulders in the lower courses.
Modifications	-
Floor	Traces of a paving of flat stones were found in room VIA along the walls. Partly preserved paving of flat stones was also found in room VII.
Furnishings	Two bothroi. A possible hearth consisting of burnt clay was located in the NW corner of room VIB, but this feature was later interpreted as part of the fallen superstructure. 2 bothroi were located in the court. A platform was constructed on top of wall 13 and terrace wall 17a, attached to the house at the NW. The bothros in room VIA was eventually filled in, and used as a pit for a child burial. The feature in room VII is not discussed in the publication. Perhaps it was a platform?
Finds	Room VIA: two bone implements, bone awl, pierced terracotta disc, obsidian flakes, stone disc, stone drill core, storage jar, jug with cut-away neck, Dark Burnished kantharos, Matt Painted vessels, many Grey Minyan and Dark burnished sherds, a few Matt Painted sherds. Room VIB: a lot of fragments of pithoi and cooking pottery, Grey Minyan bowl, many Grey Minyan sherds, obsidian flakes and blades, quartz, terracotta whorl, and two stone grinders. Room VII: bone tusk, bone pin, bone pieces, pieces of horn, stone spool, terracotta whorl, coarse jar, many sherds of Dark burnished, Coarse, and Grey Minyan. Fragments of Matt Painted sherds were fairly rare. Two handled Grey Minyan bowl, several complete vessels, a coarse cup. Bothros 7: Terracotta whorl, Grey Minyan sherds, two handled Grey Minyan bowl, and one handled Grey Minyan cup. Bothros 11: Grey Minyan bowl, Grey Minyan sherds, stone polisher, stone spool, terracotta pierced disc. Court: close to wall 13 two in situ pithoi were located. At the bottom of one of them was charcoal mixed soil. Other finds are recovered around the house as well.
Activities	Storage, eating and drinking, cooking and weaving. Possibly stone and bone working.
Date	MH I. Destroyed in late MH I/early MH II
References	Nordquist 1987
Plan	Nordquist 1987, Fig. 72

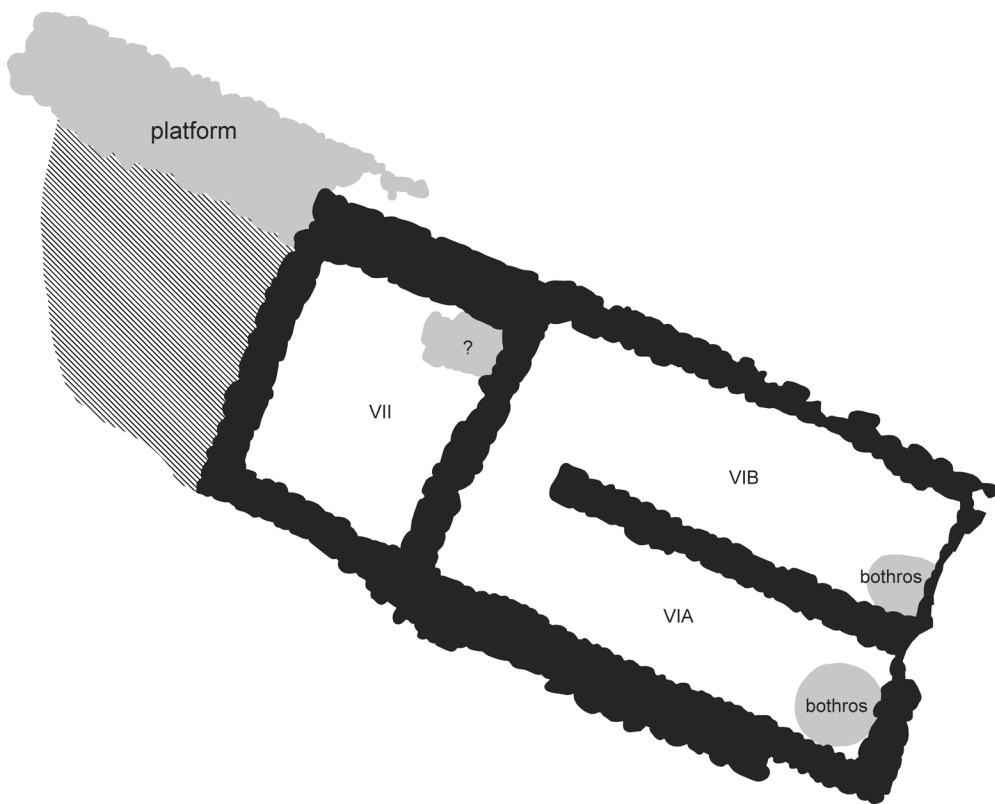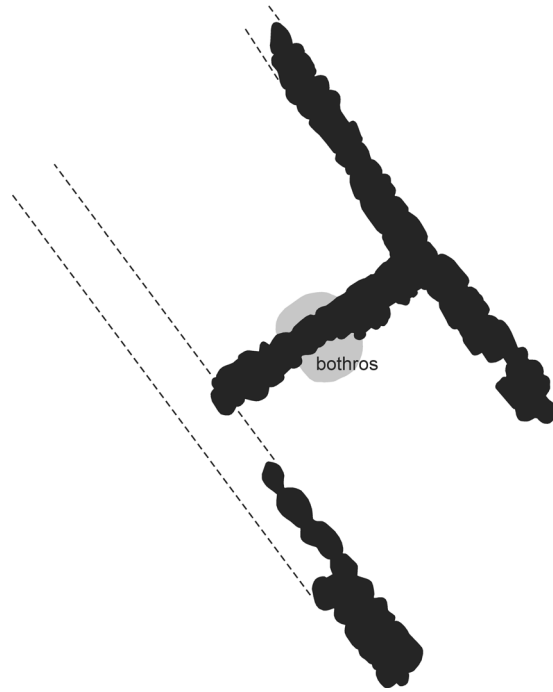



G21 Asine house U	
Preservation	Poorly preserved and only part of the north-western section is exposed. Furthermore six child graves were dug into the layers of this house.
Desertion	Deserted?
Orientation	NW-SE
Lay-out	Rectangular (?)
Size	Unclear, but width was 2.75 m
Walls	0.45 m wide, no information on courses preserved.
Floor	Unclear
Furnishings	Unclear
Modifications	Unclear
Finds	Floor: pithos fragments Just above the house: bone tool, bone awl, bone pin, worked tusk, obsidian flakes, stone disc, stone pounder, stone polisher and three stone drill cores, three terracotta whorls and a terracotta weight.
Activities	Storage. Perhaps after desertion turned into some kind of working area, considering the recovery of many tools in this small section above the house.
Date	MH (due to the mixed layers the house cannot be dated more precisely, though it is later than house T, so should be dated MH I late/MH II early or later)
References	Nordquist 1987
Plan	Nordquist 1987, Fig. 73

G22 Asine rooms 1 and 2	
Preservation	Moderately preserved, but only partly uncovered.
Desertion	Unclear, no details mentioned.
Orientation	NW-SE
Lay-out	Unclear, due to extent of excavations. But seemingly rectangular structure.
Size	Total at least 8.5 m ² Room 1: at least 2.00x 2.50 Room 2: at least 1.75 x 2.00
Walls	North-western wall: 0.75 m wide, 4 courses high South-western wall: 1.25 m wide, unclear height Central wall: 0.65-10.9 m wide, 5 courses high, 0.80-1.20 m South-eastern wall: 0.45 m wide, 0.75 m high
Floor	Room 1: lime-covered floor. Room 2: possible floor of small stones and clay at a higher level than in room 1.
Furnishings	-
Modifications	-
Finds	Among the small finds in room 1 were some obsidian and two terracotta weights. Among the small finds in room 2 were obsidian, a stone weight, a greenstone pounder/rubber, and a fragment of bronze wire.
Activities	The finds do not suggest any specialized function.
Date	MH II
References	Nordquist 1987: 69-71
Plan	Nordquist 1987, Fig. 68

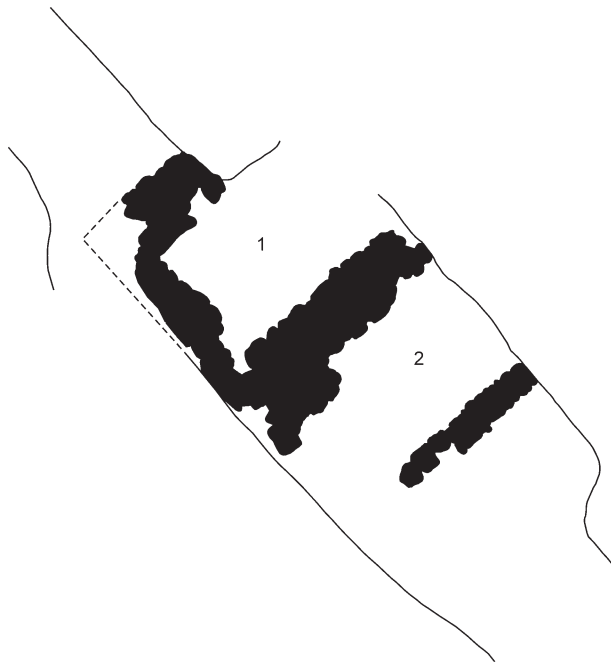


G23 Asine house A	
Preservation	Moderately preserved, and much disturbed by later building.
Desertion	Deserted? And subsequently overbuilt.
Orientation	NE-SW
Lay-out	Rectangular but irregular, at least two rooms
Size	According to Nordquist 60 m ² (8.50 x 7.00), but these seem outer measurements. An overall internal size of 31.5 m ² seems more likely. Room I: 16.90 m ² (2.25 x 7.50) Room II: 14.60 m ² (2.20-2.50 x 6.50)
Walls	0.45-0.70 m wide. 6 courses high (1.00 m) preserved.
Floor	-
Furnishings	A 50 cm wide stone bench (?) and possibly a cupboard/partitioned corner in room II
Modifications	The partition wall may have had two building phases, the earlier wall running further east.
Finds	Room I: a terracotta whorl Room II: two bone pins, sherds of Matt Painted, Dark Burnished, and Grey Minyan ware, Grey Minyan bowl, stone spool, stone drill core, two pierces terracotta discs, and a terracotta whorl.
Activities	Eating, drinking, weaving, possibly stone working
Date	MH II, mainly early MH II material.
References	Nordquist 1987
Plan	Nordquist 1987, Fig. 74

G24 Asine house Pre-D	
Preservation	Poorly preserved, as it is overbuilt by house D, only three parallel walls are preserved.
Desertion	Deserted? And subsequently overbuilt.
Orientation	NW-SE
Lay-out	Rectangular, possibly two rooms or more. The eastern most wall could also have functioned as a demarcation of a plot or court, rather than as a house wall, because of its thin width.
Size	Uncertain but could have been up to 64 m ² .
Walls	0.45-0.55 m wide, 1-2 courses high preserved.
Floor	Possibly a layer of clayey soil with much charcoal, bone and mud brick.
Furnishings	None mentioned for inside the building. Traces of paving were uncovered outside .
Modifications	-
Finds	On the floor between the walls a clayey soil with remains of bones, charcoal and worn sherds are recovered. Eastern area: a stone disc with two pierced holes, a flint object, MH II sherds and Grey Minyan sherds. Between walls 38-39: bone tool, bone awl, worked tusk, obsidian object and worn sherds.
Activities	Eating, drinking
Date	MH II
References	Nordquist 1987
Plan	Nordquist 1987, Fig. 75

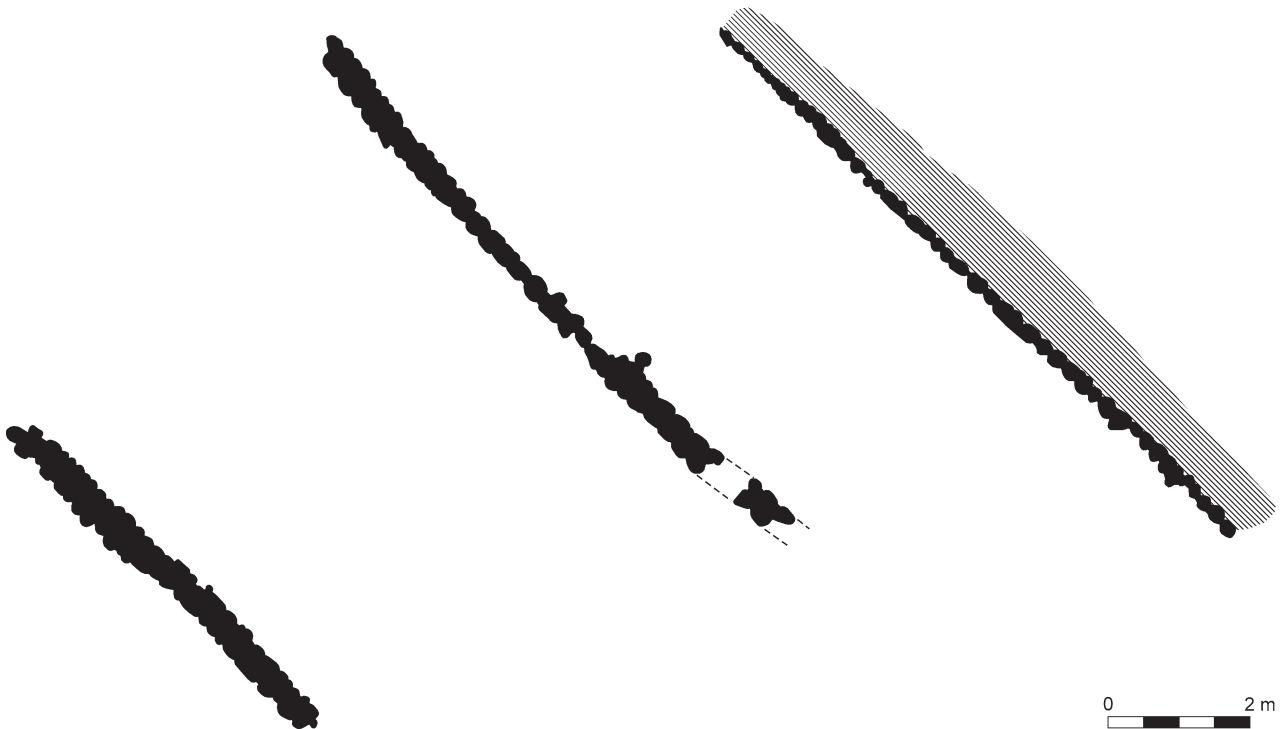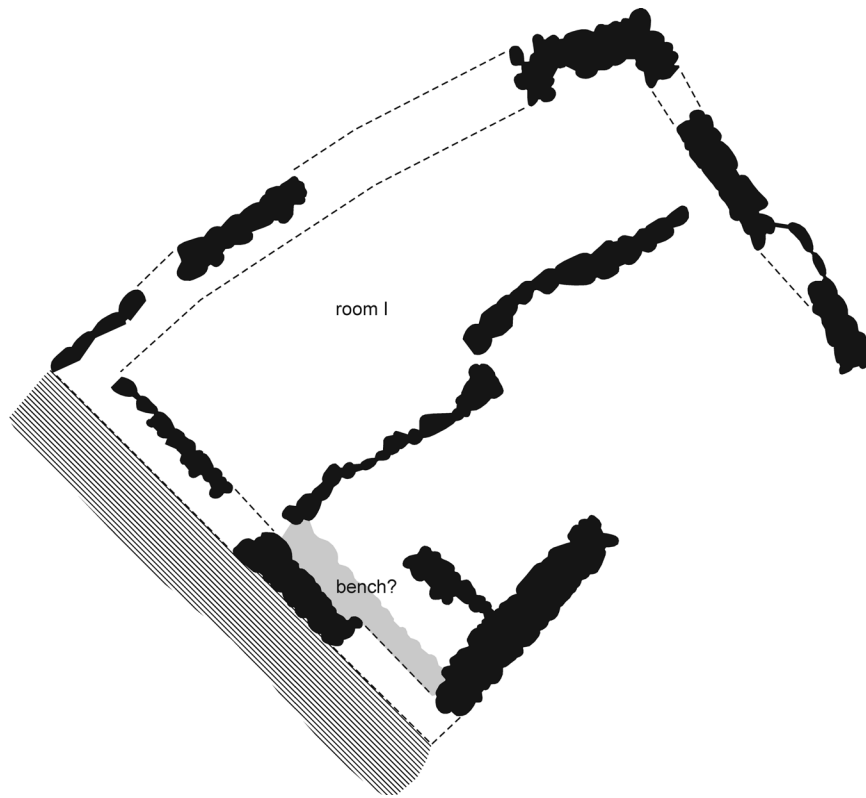


0 2 m

G25 Asine house B	
Preservation	Reasonably preserved. Northeast disturbed by Roman bath and cut by MH grave.
Desertion	Partly destroyed by fire and partly overbuilt by house C.
Orientation	NW-SE. Entrance in the SW, NW and perhaps also in the NE.
Lay-out	Trapezoidal, 11 rooms, of which one perhaps part of a staircase. Existence of an upper floor.
Size	<p>According to Nordquist 110 m², but these seem outer measurements. An overall internal size of ca. 85 m² seems more likely.</p> <p>Room III 3.25 m² (6.50 x 0.10-0.75)</p> <p>Room IV 3.75 m² (3.00 x 1.25)</p> <p>Room V 10.00 m² (5.00 x 2.00)</p> <p>Room VI 14.25 m² (9.50 x 1.50)</p> <p>Room VII 11.40 m² (6.50 x 1.50-2.00)</p> <p>Room VIII 15.75 m² (4.50 x 3.50)</p> <p>Room IX 15.30 m² (8.50 x 1.80)</p> <p>Room X 8.00 m² (4.00 x 2.00)</p> <p>Room XI 3.00 m² (2.00 x 1.50)</p>
Walls	0.50-1.20 m wide, 6+ courses high preserved (up to 1.10 m high). The typical inner wall is described as two stone rows of often triangular stones, placed with apexes inwards and the flat bases outwards towards the face of the wall. Walls seem to have been reinforced with wood.
Floor	<p>Room V small floor of flat stones</p> <p>Room VII sooty layer mixed with charcoal on top of hard packed clay</p> <p>Room VIII floor consists of a layer with a lot of pebbles</p> <p>Room IX layer with lots of pebbles and sherds may be the floor</p> <p>Room X layer with pebbles and sherds may be the floor</p>
Furnishings	Two rectangular stone platforms in room VII, presumably for wooden support of the upper floor. Possible hearth in room VI and hearth in room VIII. Charcoal in room VII might have been remains of a staircase leading to the second floor. Another wooden construction or staircase might have been located in room III. Traces of paving were uncovered around the house.
Modifications	Rooms 1 and 11 which were attached to the southernmost wall may be later additions, but presumably were part of house C. These rooms were unlikely to have had an upper floor, because of their thin walls.
Finds	<p>Room VI: stone drill core</p> <p>Room VII: sherds</p> <p>Room IX: sherds</p> <p>Room X: sherds</p> <p>North-western part: two millstones, pieces of lead</p> <p>Southern part: terracotta disc, whorl and two spools and two obsidian objects</p> <p>From upper floor: two jugs with cut-away neck of which one is slipped and one is made in dull black clay, two painted jars, two Yellow Minyan two-handled bowls, a Red Slipped and Burnished basin/bowl and an obsidian arrowhead.</p> <p>House B: terracotta pierced disk, stone celt, worked horn, two bone pins</p>
Activities	All household activities. Presumably working and storage below, and living upstairs.
Date	MH II Late–early MH III
References	Nordquist 1987
Plan	Nordquist 1987, Fig. 76


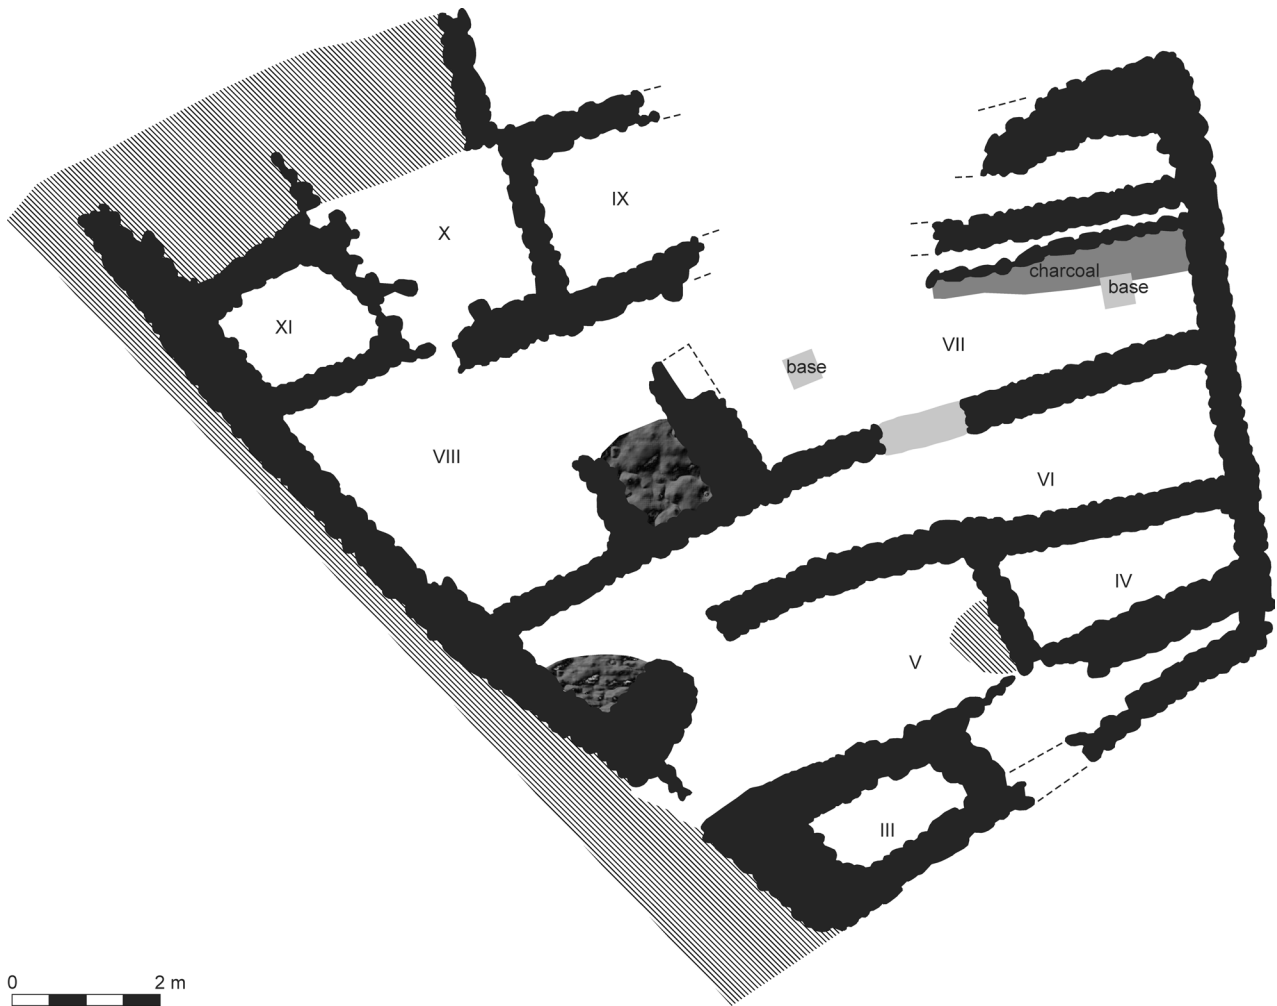


G26 Asine house D	
Preservation	Reasonably preserved
Desertion	Partly destroyed by fire and partly overbuilt by house E and cut by graves.
Orientation	NW-SE, entrances in the NW, and also in the SW.
Lay-out	Rectangular, 11 rooms, perhaps these 11 rooms formed one, two or three different household units. Possible existence of an upper floor (?). Section 1 would be formed by rooms XIX, XV, and XVI Section 2 would be formed by rooms XXI, XX, XVII and XVIII. Section 3 would be formed by rooms XIII and XIV In the case of two households, room XIV would go with section 1 and room XIII with section 2.
Size	According to Nordquist 192 m ² , but these seem outer measurements. An overall internal size of ca. 125 m ² seems more likely. Internal size of the different sections: Section 1 49.4 m ² (or 66.9 m ² if combined with section 3) Section 2 44.2 m ² (or 57.7 m ² if combined with section 3) Section 3 30.9 m ²
Walls	0.35-1.00 m wide, 2+ courses high preserved (ca. 0.50 m high).
Floor	First floor level: Room XIX pebble mixed clayey soil Room XX sandy and clayey soil Room XV: pebble and clay floor. Also lime covered floor of 0.5 cm thick. Second floor level: Room XIX clayey soil Room XX clayey soil Room XV lime-covered Room XVII stone slabs Room XVIII hard packed clay. The area outside it might have had a stone floor. Room XIII: possible clayey layer
Furnishings	Section 1: round stone construction of 1 m in diameter in room XVI (not in plan). Possible hearth in room XV consisting of an area with lots of sooth and charcoal (not in plan). To second phase, belongs a small room or platform in XIX. Section 2: section of stone paving in room XX (base for structure?). Doorjamb in room XVIII (not in plan). Outside room XVIII is a marked off area with remains of a hearth or oven. Section 3: horse-shoe shaped clay hearth or oven in room XIV
Modifications	Sections 1 and 2 were designed as an entity, while section 3 might have been added later. Internal wall 36, partitioning off room XIX, is certainly later in date. Wall 34 had two construction methods indicating two construction phases. Some of the walls may date from a rebuilding of the house. Some evidence of at least two floor layers, but in between are sometimes floor renewals or changes, as in room XV.
Finds	Section 1, Room XV: flint and bronze fragment Room XIX below first floor: whetstone, bone awl and a bone pin Room XIX first floor: animal bones, worn sherds and Kamares ware Room XIX above first floor: Coarse, Minoanizing and Matt Painted sherds, shell fragments, three bone pins, bone fragments, polished tusk, pieces of obsidian, obsidian core, stone drill-core, stone vessel, lead fragments, bronze fragment, and terracotta ring. Room XIX second floor: Yellow Minyan, Fine Matt Painted and Minoanizing sherds, a complete Matt Painted vessel, a lead fragment and a bone ring. Section 2, Room XVII above floor: pithos fragments Room XX first floor: three pieces of obsidian Room XX second floor: some obsidian, ceramic cooking stand, two cups, a pan, a stone pounder and a bone awl. Room XXI: coarse cup and a Grey Minyan bowl Section 3, Room XIII: obsidian object, Dark burnished bowl, Yellow Minyan bowl, Matt Painted vessel. Around court/oven area: terracotta whorl, Grey Minyan cup, Matt Painted bowl, cup, bone pin, flint and obsidian fragments, and a stone drill-core.
Activities	All household activities, perhaps stone working.
Date	MH II late(r)–early MH III
References	Nordquist 1987
Plan	Nordquist 1987, Fig. 78

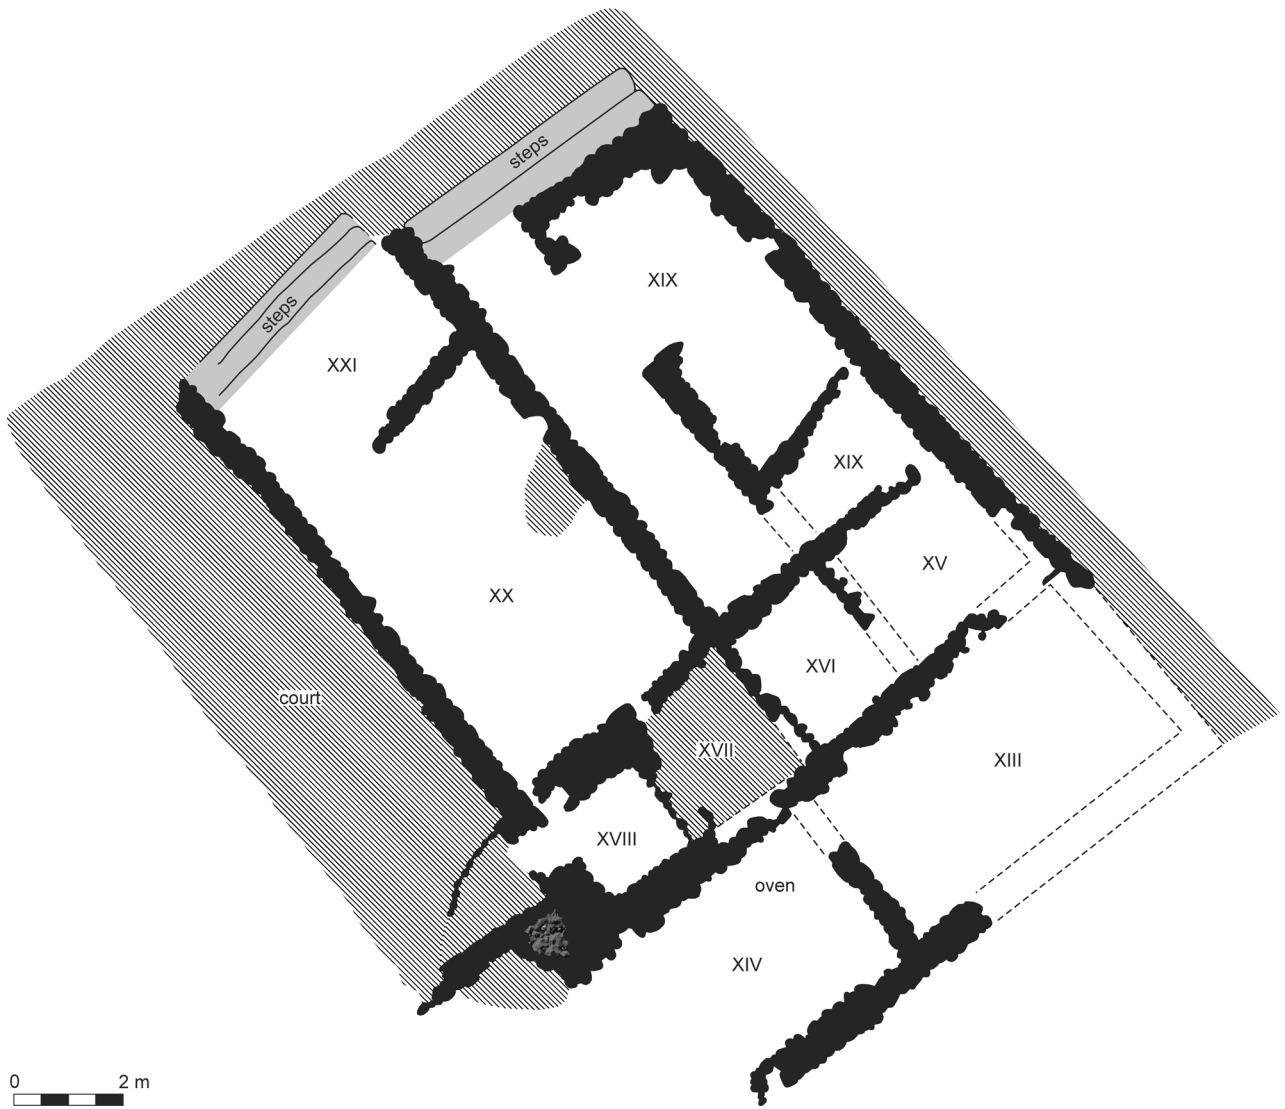


G27 Asine Barbouna building I	
Preservation	Poorly preserved
Desertion	Probably destroyed by fire, maybe an earthquake.
Orientation	NW-SE
Lay-out	Unclear, but at least one room.
Size	Unclear, but one room was at least 6.00 long.
Walls	0.40-0.74 m wide, 1-2 courses high preserved (0.35 m high).
Floor	Unclear
Furnishings	Unclear
Modifications	Unclear
Finds	Obsidian arrowhead, obsidian core and obsidian fragments, terracotta spool. Two Matt Painted two-handled bowls, a Yellow Minyan 2 handled bowl, and a plain grooved 2 handled bowl, a coarse jar, a Matt Painted jar, and a coarse Gold Mica jar, a Dark Tempered kantharos, two other Matt Painted Gold Mica vessels, two other vessels and sherds of fine ware.
Activities	Eating, drinking, storage, weaving. Presumably all household activities.
Date	Early MH III
References	Nordquist 1985, 1987
Plan	Nordquist 1987, Fig. 85


G28 Asine Barbouna building II	
Preservation	Poorly preserved and partly disturbed by graves.
Desertion	Maybe destroyed by an earthquake and later turned into a cemetery.
Orientation	NW-SE
Lay-out	Unclear, but at least two rooms
Size	Room K measured at least 16 m ² (4.00 x 4.00)
Walls	Room K was partly cut out of bedrock, dressed on both sides, and with a superstructure partly made of rough stones. 0.45-1.00 m wide, 1 course preserved, up to 0.60 m high.
Floor	Room K rock cut floor Room N rock cut floor and covered by a layer of clay that had been fired deliberately.
Furnishings	A rock cut shelf, 0.60-0.70 wide and 0.25 high, in the rock cut wall of room K.
Modifications	Unclear
Finds	Room K: chipped stone, bronze chisel, terracotta spool, several ceramic vessels and a cup. Room N: two coarse basins, a Matt Painted Aeginetan basin, a Matt Painted Aeginetan bowl, a red slipped and burnished bowl, two two-handled Dark Tempered bowl, two two-handled AM bowls, two coarse cooking vessels, two cups, two Dark Tempered kantharoi, three Dark Tempered and Matt Painted kantharoi.
Activities	Eating, drinking, and cooking. Presumably all household activities.
Date	Early MH III
References	Nordquist 1985, 1987
Plan	Nordquist 1987, Fig. 87

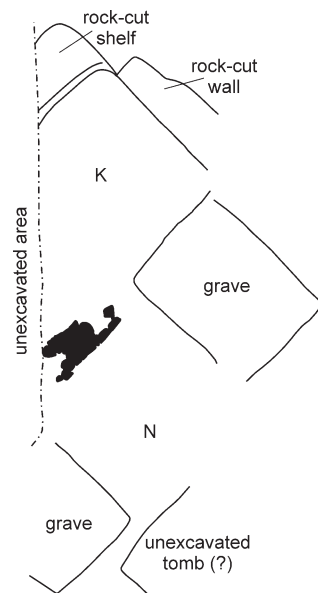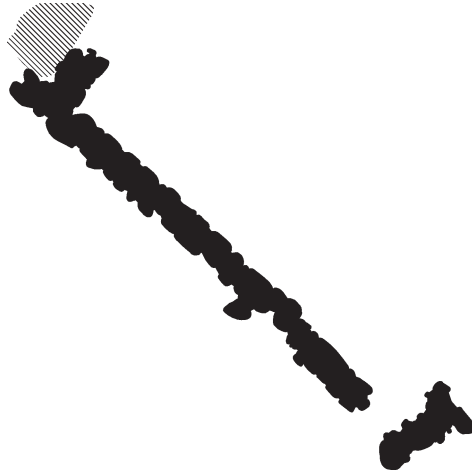

G29 Asine house C	
Preservation	Poorly preserved, and disturbed by later building and the cutting of graves.
Desertion	The area seems to be partly turned into a graveyard after abandonment of the house.
Orientation	NE-SW?
Lay-out	Rectangular, at least five rooms/areas. However, some seem to be attached to house B, and one wall seems to have functioned as a retaining wall, rather than house wall. It is therefore not entirely clear if house C is indeed a house.
Size	Unclear, but room IAB measures 8.5 m ² (2.00-2.25 x 4.00)
Walls	0.45-1.00 m wide, 3 courses preserved.
Floor	Room XII 5-6 cm thick layer of hard packed soil mixed with lime.
Furnishings	-
Modifications	-
Finds	Room XII: two bone awls, a terracotta bead, a whorl and a Cycladic/Melian Matt Painted cup. Above room V of building B, a Matt painted, panelled decorated cup
Activities	Unclear
Date	Late MH III–LH I
References	Nordquist 1987
Plan	Nordquist 1987, Fig. 82


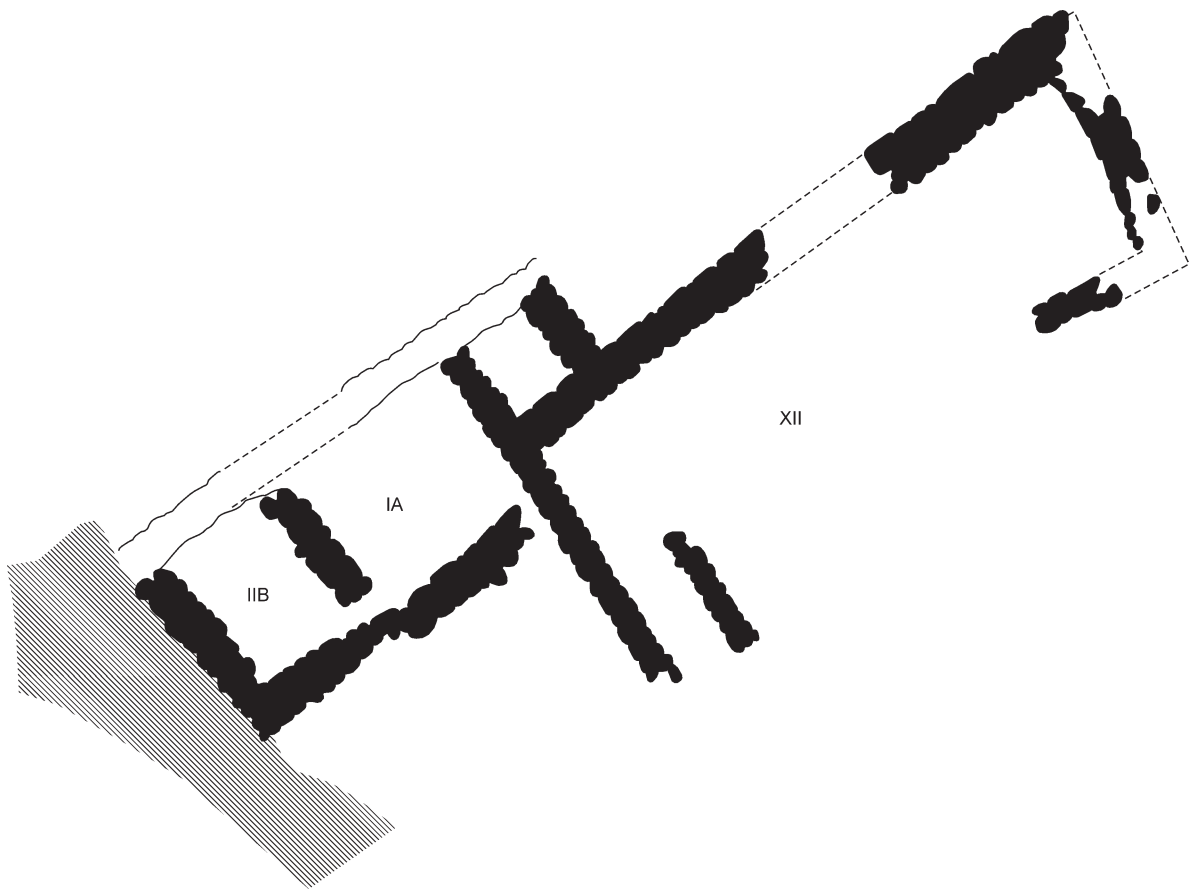


G30 Asine house E	
Preservation	Reasonably preserved, but disturbed by Late Helladic and Roman building activities, hereby the walls were levelled and the floor layers disturbed. Also cutting of graves.
Desertion	Abandoned? Also here MH graves are recovered, suggesting that after abandonment the area was turned into a cemetery.
Orientation	NE-SW, entrance in the NE, beside the platform.
Lay-out	Rectangular, at least four rooms
Size	According to Nordquist 175 m ² (11.00 x 16.00) but these seem outer measurements. An overall internal size of 108 m ² seems more likely. Room XXII 18.5 m ² (4.50 x 4.50) Room XXIV 35.00 m ² (3.50 x 10.00) Room XXIII 16.20 m ² (3.40 x 4.75) Room XXV 40.00 m ² (4.00 x 10.00)
Walls	The walls were thick and sturdy. 0.50-1.30 m wide, up to 2 courses preserved.
Floor	Room XXII stone or pebble floor Room XXIII clayey soil Court? Lime-covered
Furnishings	Outdoor platform next to the entrance, oven in the western part of the house, and a bench / thin 0.35 m wide ledge of medium sized stones in room XXIII. Door jamb in room XXII. None of the Furnishings inside the house were published in the plans.
Modifications	-
Finds	Room XXII: stone drill-core, obsidian object and arrowhead, chert object, terracotta cooking slab/pit support, whorl, two tusks and an awl made of fishbone. Room XXIII: two terracotta pit supports, and whorl and a bone shuttle Room XXV: a Matt Painted lid, and Matt Painted Gold Mica sherds, a bone pin and terracotta whorl.
Activities	Cooking, and presumably all household activities.
Date	Late MH III–LH I
References	Nordquist 1987
Plan	Nordquist 1987, Fig. 84

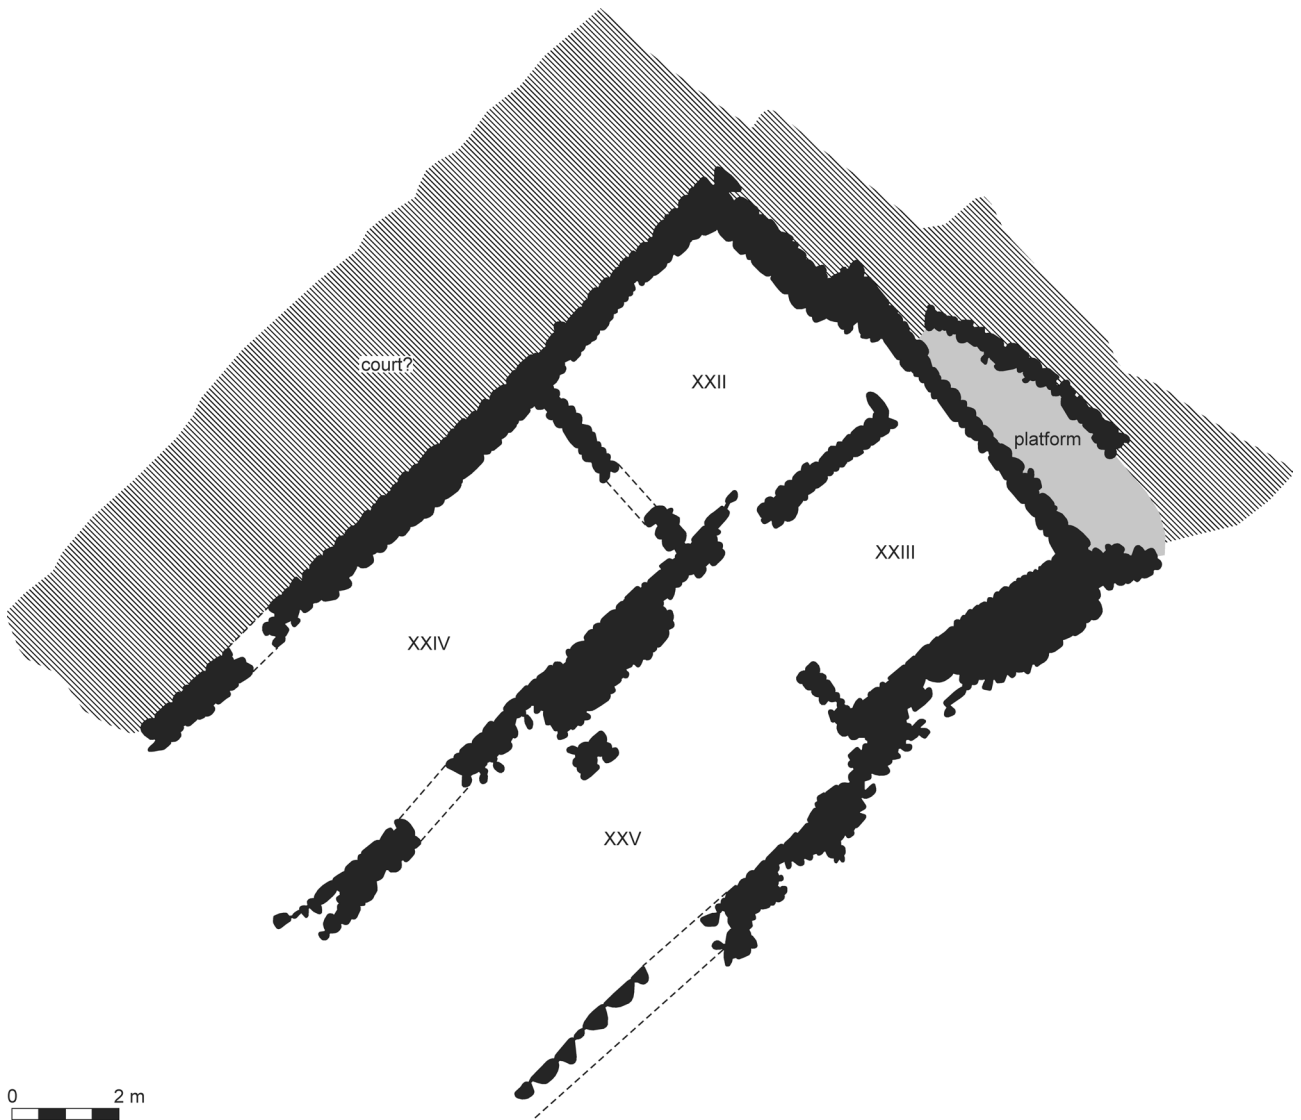



G31 Berbati house NP	
Preservation	Well preserved. The entire room N is excavated, but room P only partly.
Desertion	Destroyed by fire.
Orientation	E-W, with entrance in the east.
Lay-out	Rectangular, 2 rooms
Size	Room N (4.10-4.90 x 3.15-3.60) Room P (3.60 x 5.25) 40+ m ²
Walls	Courses of stone, on top of which courses of rubble and then mud bricks. 0.60-0.70 m thick walls, but also very thin wall, or seemingly just one row of stones.
Floor	-
Furnishings	In room N five circular rock cut depressions, used for the support of pithoi. Two bothroi
Modifications	-
Finds	Three in situ pithoi in room N, fragments of two other pithoi, sherds of table ware and other pottery such as early Grey Minyan, and coarse ware. In the destruction debris were remains of terracotta tiles.
Activities	Storage, processing of food, possibly living and working
Date	Transitional EH III / EH III late-early MH
References	Säflund 1935
Plan	Säflund 1965: Plan I

G32 Berbati house FG	
Preservation	Good, but room G is not entirely excavated, because of a modern terrace wall.
Desertion	Deserted?
Orientation	NW-SE, entrance possibly in the NW.
Lay-out	Rectangular, 2 rooms
Size	Room 1: ca. 3.04+ x 5.07 Room 2: ca. 4.73 x 5.58 Uncovered for ca. 41.8 m ²
Walls	The average width of the walls is 0.50 m, preserved up to 2-3 courses
Floor	-
Furnishings	Numerous rock depressions are of an earlier date than the house. They ranged in width from 0.50-2.00, and were probably for the support of storage vessels. Seven were found in room F and one in room G.
Modifications	-
Finds	Several types of painted ware, but also intrusive ware. Several oval stones, which were perhaps used as lids of pithoi.
Activities	Storage
Date	MH I
References	Säflund 1935
Plan	Säflund 1965: Plan I

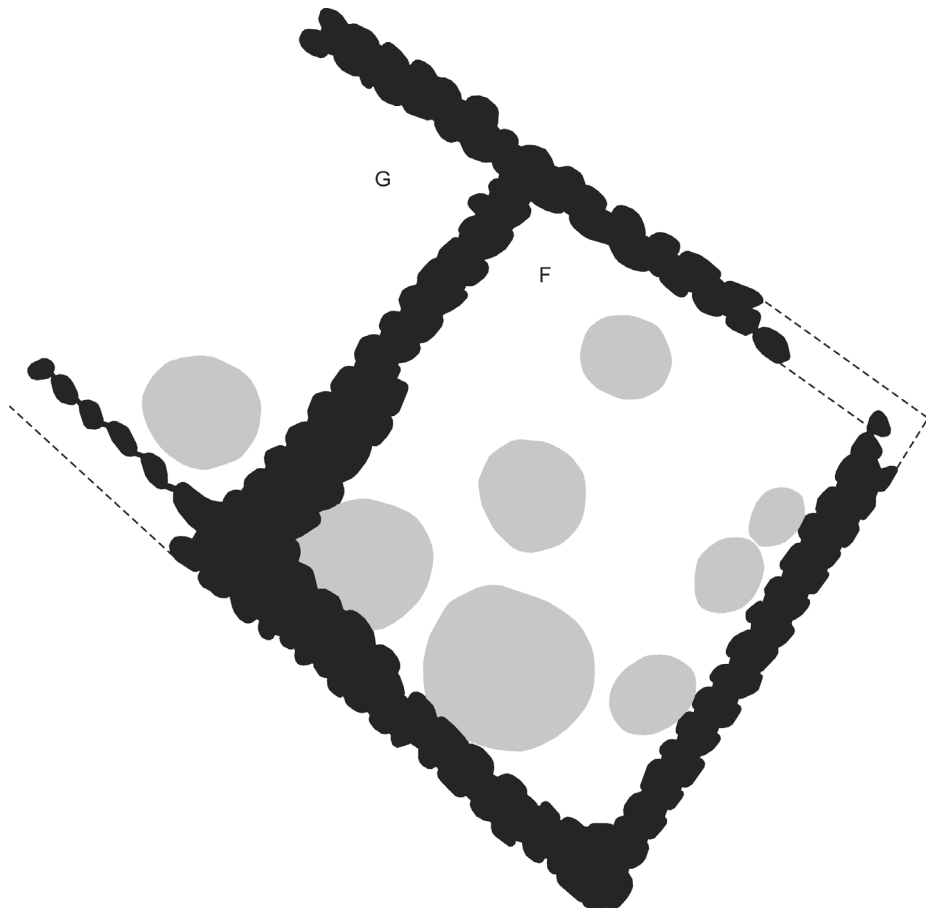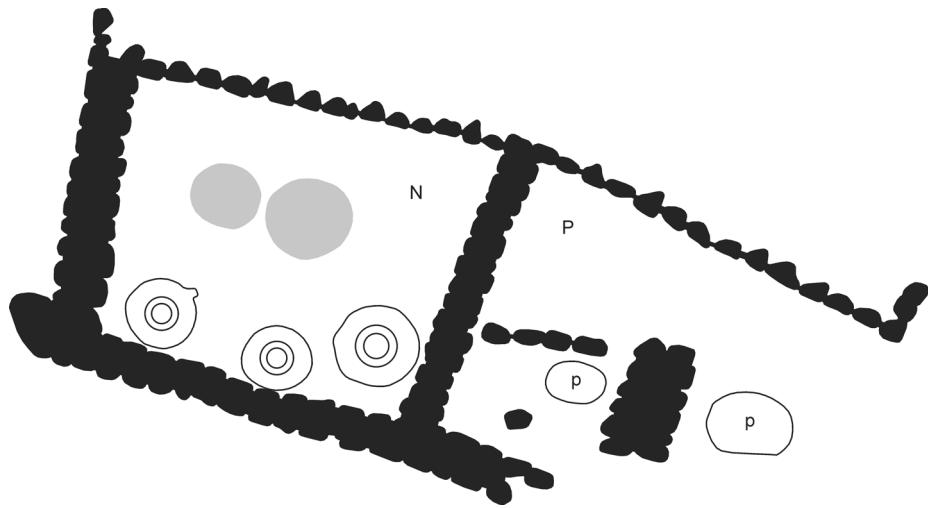



G33 Lerna house 1.1	
Preservation	Poorly preserved
Desertion	Eventually overbuilt by a new apsidal house and part of another house during this same phase.
Orientation	E-W, with apse in the west and entrance presumably in the east.
Lay-out	Apsidal, only large room.
Size	Ca. 12 x 7 m, ca. 80 m ²
Walls	Postholes recovered, and a number of stones that must have been wedged against the poles.
Floor	Beaten earth and clay, and in the floor were other postholes.
Furnishings	Hearth (stones and a roughly circular patch of burning) in north-eastern corner (not indicated in the plan). It is unclear what the grey feature in the plan represents.
Modifications	Probably none, as it was short lived.
Finds	The finds from the house were discarded.
Activities	?
Date	EH III: 1
References	Caskey 1966, Rutter 1995
Plan	Rutter 1995, Plan III

G34 Lerna house 1.2	
Preservation	Poorly preserved
Desertion	Deserted before the end of phase 1, and two bothroi were cut in the house. During phase 2 overbuilt by other houses.
Orientation	E-W, with entrance presumably in the west.
Lay-out	Trapezoidal, two rooms and a portico, or three rooms.
Size	Uncovered /preserved for ca. 19+ m ² 1.4+ x 2.6+ = 3.7 3.2 x 2.6+ = 8.4 2.5 x 2.7+ = 6.8
Walls	Ca. 0.40 m in width.
Floor	Unclear. But presumably hard packed earth.
Furnishings	-
Modifications	Two floors were recovered in the west room.
Finds	Fragments of 3 bass bowls, a lid, 2 narrow necked jars, a pyxis, a cup and 5 tankards. Primarily Dark on Light decorated, only three pieces of medium coarse to coarse.
Activities	Eating, drinking, cooking and storage.
Date	EH III: 1
References	Rutter 1995
Plan	Rutter 1995, Plan III

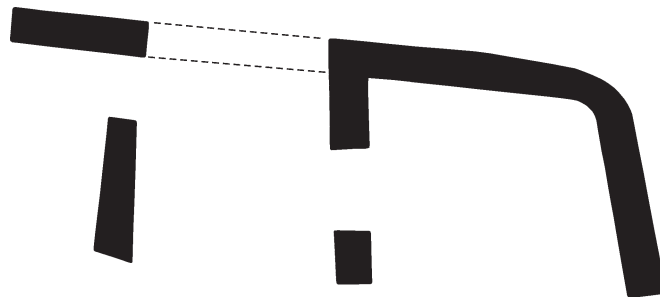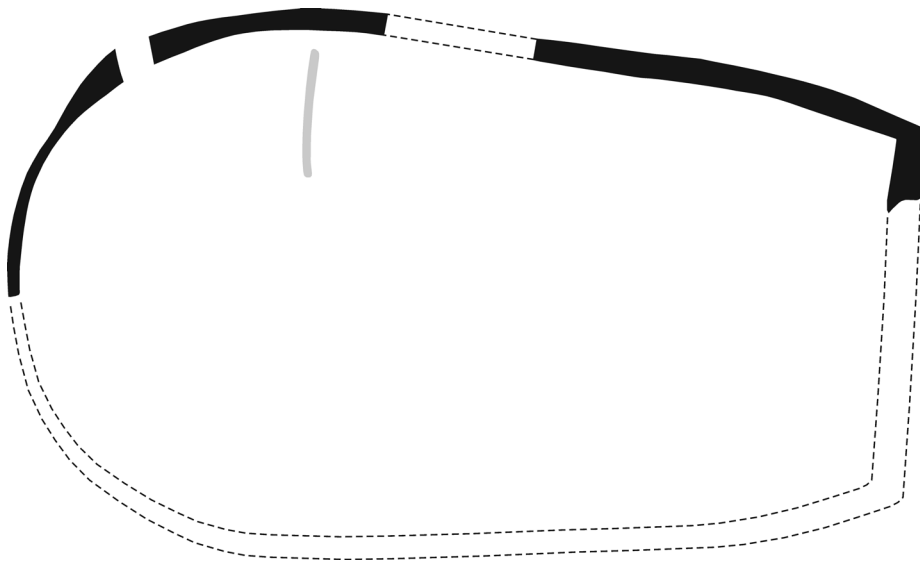



G35 Lerna house 1.3	
Preservation	Poorly preserved
Desertion	Remains in use into the next phase. Subsequently reconstructed as house 3.1.
Orientation	W-E, with the apse in the west and the entrance presumably in the east.
Lay-out	Apsidal, at least two rooms.
Size	Uncovered /preserved for ca. 49+ m ² 4.3+ x 6.6 = 28.4 3.1 x 6.6 = 20.5
Walls	The house was based in part on stone foundations, probably 0.50 m in width.
Floor	Clay floor (assuming this is house B1 as described in Caskey 1966: 148)
Furnishings	A stone platform in the southern part of the house. Unclear dimensions. A large hearth in the centre of the main room, and bothros towards the east. An 80 cm wide bench along the northern side of the main room (?). Except for the bothros, the internal furnishings were not published in the plan.
Modifications	Two floors were identified in the main room of the house. The stone platform dated to the second floor.
Finds	From first floor: fragments of a DoL pyxis, and a solidly painted and burnished tankard. From around the stone platform came fragments of a fine burnished non-grey bass bowl. From bothros: two handled marble cup of Lefkandi I type, fragments of a DoL Ouzo cup, bass bowl, fine-burnished non-gray tankard, medium coarse burnished tankard and pedestal footed cup, and a medium coarse unburnished handleless cup. Furthermore, a bone awl, and two stone pierced discs.
Activities	Eating and drinking, perhaps food preparation.
Date	EH III: 1–early EH III:2
References	Rutter 1995
Plan	Rutter 1995, Plan III

G36 Lerna house 1.4	
Preservation	Poorly preserved, only small section of the apse has been uncovered.
Desertion	Remains in use into the next phase. Subsequently reconstructed as house 3.2.
Orientation	W-E, with the apse in the west and the entrance presumably in the east.
Lay-out	Apsidal, at least two rooms.
Size	Unclear, uncovered for ca. 7 m ²
Walls	0.50-0.70 m in width
Floor	'A hard level' (Banks 1995: 6)
Furnishings	None mentioned. The associated bothros seems to antedate the house.
Modifications	None, or cut away by builders of the next period.
Finds	Fragments of a Dark-on-Light narrow necked jar.
Activities	Unclear, but presumably all household activities.
Date	EH III: 1–early EH III:2
References	Rutter 1995
Plan	Rutter 1995, Plan III

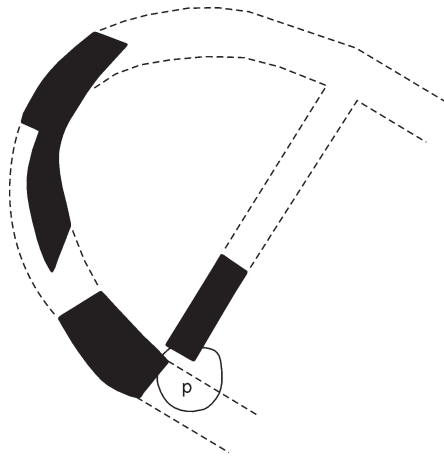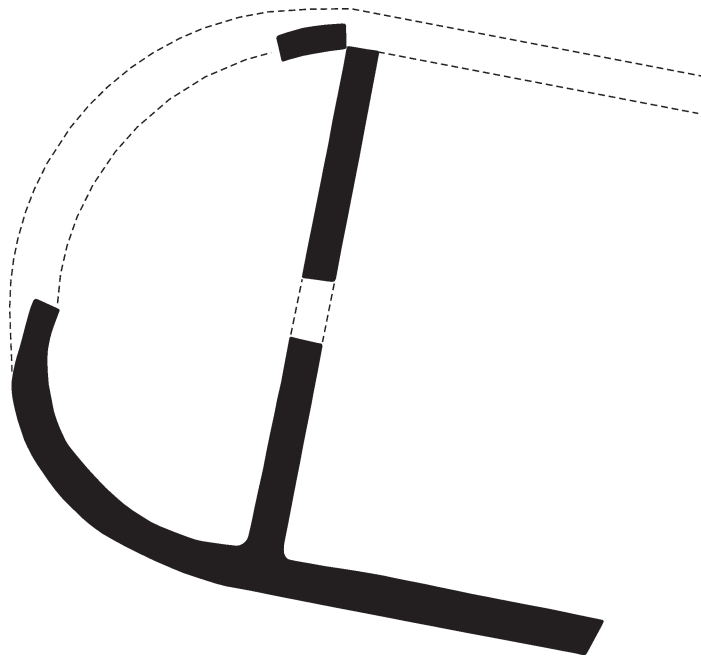



G37 Lerna house 2.1	
Preservation	Moderately preserved.
Desertion	Destroyed by fire, and reconstructed as house 2.3
Orientation	W-E, the entrance in the west, but perhaps also in the south opening off the court.
Lay-out	Rectangular, two rooms. Possibly also a court.
Size	Ca. 31+ m ² 5.3 x 3.7 = 19.6 2.7+ x 4.0 = 11
Walls	Ca. 0.45-0.60 m wide
Floor	Unclear. But presumably hard packed earth. Suggested that it had two floors (Caskey 1956: 161) but the second floor was probably the floor from house 2.3
Furnishings	Beneath the east wall was a bothros containing the almost complete skeleton of a piglet, and fragments of a second. Perhaps this should be interpreted as a foundation deposit. Inside the house were three other bothroi. Caskey (1956: 161) mentions several furnishings, which Banks (1995) ascribed later to house 2.3. These furnishings were a hearth along the northern wall of the eastern room, with a floor made of potsherds. On the opposite side was a rectangular platform, 2.00 x 1.50 m made of a single layer of large bricks.
Modifications	Might be considered a reconstruction of house 1.2, but none of the walls of 2.1 coincided with house 1.2. Caskey (1966: 148) mentioned evidence of repairs or reconstruction at the eastern end. However, it cannot be entirely certain if these were indeed carried out on house 2.1, as Caskey was not able to discern houses 2.1 and 2.3. The reconstruction might actually be house 2.3.
Finds	East room: fragments of 2 askoi, 6 bass bowls, a bowl, a jug, 8 narrow necked jars, a pithos, two pyxides, a cup, 5 tankard, and 5 wide mouthed jars. From bothroi: fragments of 12 bass bowls, 5 narrow necked jars, an Ouzo cup, 2 pyxides, 1 cup, 6 tankard and 2 wide mouthed jars. House 2.1 is the same as house CU (Caskey 1956: 161-162), as the three-spouted vessels was recovered here. However, furnishings of house 2.3 are also grouped under 2.1. Other objects mentioned as coming from house CU were (but which perhaps could also be ascribed to house 2.3): bronze/copper nail and pin, a stone pounder, a slate disc, two obsidian blades, three awls, a tube, a polishing tool, a bone spatula a bead made from a fish vertebra, a terracotta whorl and charred grain
Activities	Eating, drinking, storage and cooking
Date	EH III: 2
References	Caskey 1966, Rutter 1995
Plan	Rutter 1995, Plan IV

G38 Lerna house 2.2	
Preservation	Poorly preserved
Desertion	Unclear.
Orientation	W-E, unclear where the entrance is located, perhaps in the east, opening off the court.
Lay-out	Rectangular, at least two rooms, and possibly a court.
Size	Ca. 17+ m ² 1.1+ x 2.8 = 3.0 4.5 x 3.2 = 14.4
Walls	Ca. 0.45-0.60 m wide.
Floor	Unclear. But presumably hard packed earth?
Furnishings	-
Modifications	None?
Finds	Floor megaron: fragments of a bass bowl, two cups and a tankard From the court outdoors: fragments of 2 bass bowls, 3 bowls, 2 jugs, 6 narrow necked jars, 3 Ouzo cups, 4 pyxides, 5 cups, 17 tankards and a wide mouthed jar. East of the court: fragments of a bass bowl, a jug, a lid, a narrow necked jar, an Ouzo cup, a cup and 3 tankards.
Activities	Eating, drinking, cooking and storage
Date	EH III: 2
References	Rutter 1995
Plan	Rutter 1995, Plan IV

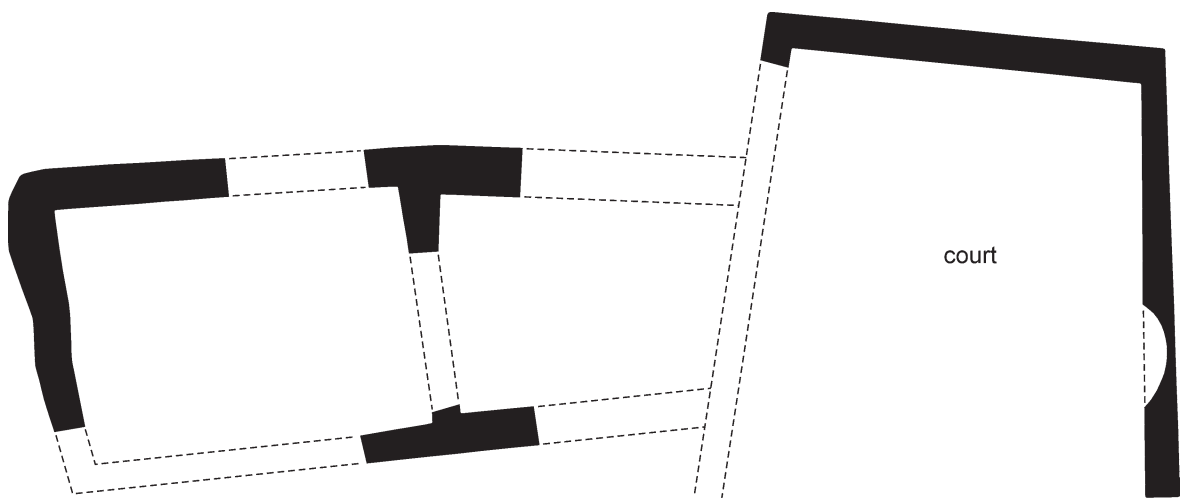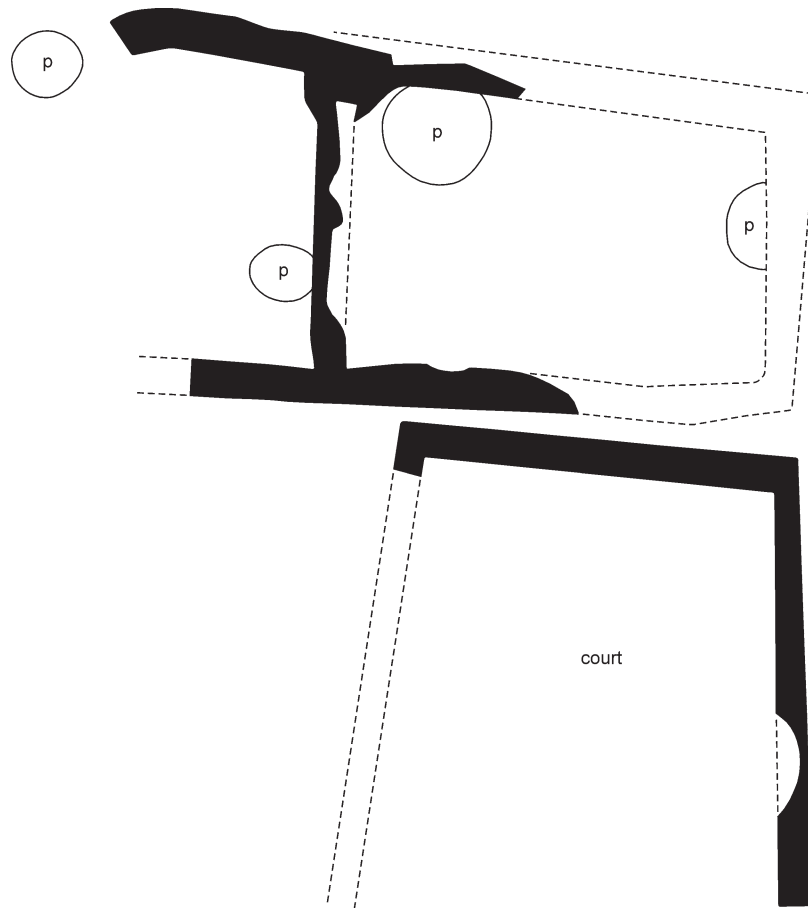



G39 Lerna house 2.3	
Preservation	Moderately preserved
Desertion	Destroyed by fire.
Orientation	W-E, the entrance in the west, but perhaps also in the south opening off the court.
Lay-out	Rectangular, two rooms and a portico.
Size	Ca. 32 m ² 4.4 x 2.8 = 12.5 5.3 x 3.7 = 19.6
Walls	Ca. 0.35-0.95 m wide.
Floor	Unclear. But presumably hard packed earth.
Furnishings	Hearth in the eastern room near the north wall. A brick platform near the south wall, measuring 2.00 x 1.50 m. A bothros. Only the bothros was depicted in the published plan.
Modifications	House 2.3 was built in part on the same stone foundations as 2.1 .
Finds	East room: fragments of 2 bass bowls, a bowl, a jug, 6 narrow necked jars, a cup, 3 tankards and a wide mouthed jar. The fragments of a wide mouthed jar made up the base of the hearth. West room: fragments of a bowl, a jug, 3 narrow necked jars, a pithos, a pyxis, 10 tankards, and 2 wide mouthed jars. From bothros: fragments of a cup, and a jug, two bone polishers and two bone awls.
Activities	Eating, drinking, storage, cooking.
Date	EH III: 2
References	Rutter 1995
Plan	Rutter 1995, Plan IV

G40 Lerna house 2.4	
Preservation	Moderately preserved
Desertion	Abandoned
Orientation	W-E, entrance presumably in the west.
Lay-out	Rectangular, two rooms, and a possible third or a portico. Possible attached circular storage at the eastern wall.
Size	Ca. 23 m ² 1.2 x 1.3 = 1.6 3.1 x 3.6 = 11.0 2.6 x 4.0 = 10.5
Walls	Ca. 0.35-0.45 m wide
Floor	Unclear. But presumably hard packed earth.
Furnishings	The plan renders the impression that a platform was located in the north-eastern corner of the western room.
Modifications	Two successive floor levels.
Finds	From the earlier floor came fragments of 3 tankards and 2 pyxides From the later floor came fragments of a bowl and a pyxis. .
Activities	Eating, drinking and storage
Date	EH III: 2
References	Rutter 1995
Plan	Rutter 1995, Plan IV

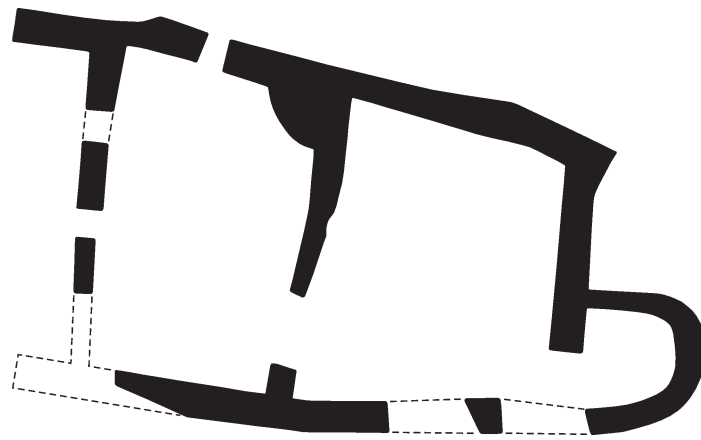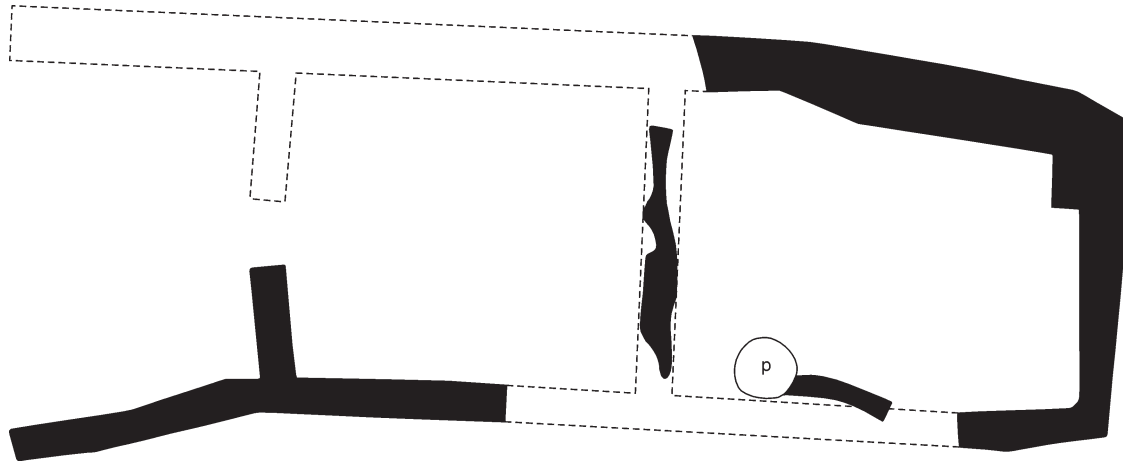

G41 Lerna house 3.1	
Preservation	Moderately preserved.
Desertion	Abandoned early during this phase. Some of the street fill spilled unto the brick of the north wall, which was later incorporated into the reconstructed house, namely house 3.4
Orientation	NW-SE, apse in the WNW and entrance in the ESE.
Lay-out	Apsidal, one room
Size	60 m ² 9.7 x 6.2 = 59.9
Walls	Ca. 0.70-0.95 m wide.
Floor	Unclear
Furnishings	A large posthole in the middle of the house. A hearth towards the rear of the main room. Remains of a stone platform in the southern part of the apse, but of unclear dimensions. None of them were illustrated in the published plan.
Modifications	None?
Finds	No significant pottery was found on the floor.
Activities	Unclear.
Date	EH III: 3
References	Rutter 1995
Plan	Rutter 1995, Plan V



G42 Lerna house 3.2	
Preservation	Poorly preserved, due to overbuilding, but also only partly uncovered.
Desertion	Overbuilt
Orientation	NW-SE
Lay-out	Apsidal, at least two rooms.
Size	At least uncovered / preserved for 23 + m ² 4.8 x 4.8
Walls	Ca. 0.25-0.35 m wide
Floor	Floor was identified but not described.
Furnishings	Bothros in the western room. Bothros in the eastern room might belong to this building or to the successor 3.5
Modifications	Rebuilt as houses 3.5
Finds	There were no related finds on the floor. From western bothros: fragments of a tankard and a rim-handled cup. From eastern bothros: fragments of a wide mouthed jar and two bass bows.
Activities	Unclear, but probably all domestic activities.
Date	EH III: 3
References	Rutter 1995
Plan	Rutter 1995, Plan V

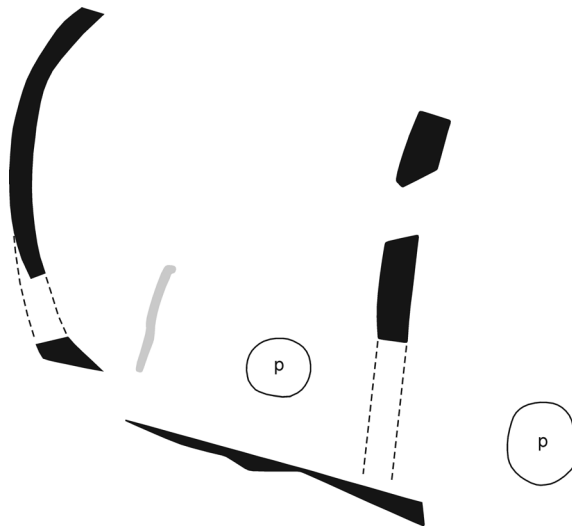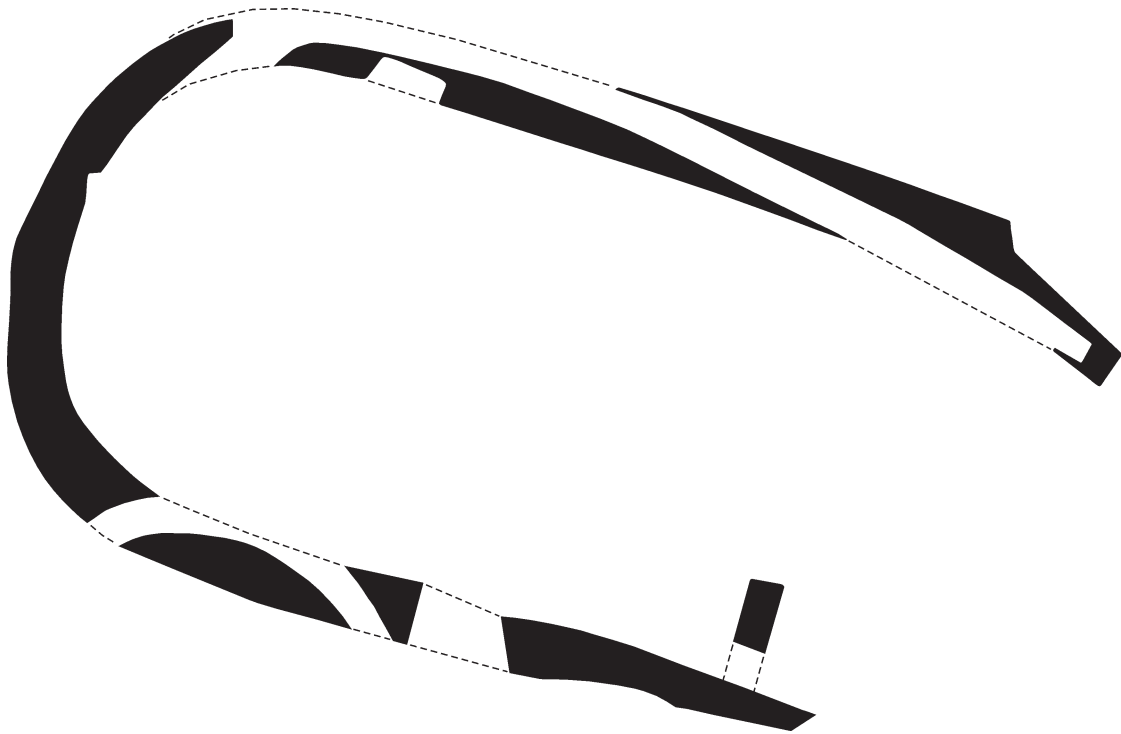

G43 Lerna house 3.3	
Preservation	Poorly preserved.
Desertion	Apparently destroyed by fire, considering the burnt floor deposit.
Orientation	E-W
Lay-out	Apsidal, at least two rooms.
Size	Preserved area ca. 14+
Walls	Ca. 0.70 m wide
Floor	Unclear.
Furnishings	Hearth (not published in plan). Bothros in the south-western corner of the main room.
Modifications	None mentioned.
Finds	Burnt floor deposit consisting of sherds of a wide mouthed jar. The sherds of another wide mouthed jar made up the floor of the hearth. Bothros: fragments of three bowls, a narrow necked jar, a rim handled cup, and two wide-mouthed jars.
Activities	Unclear, but probably all domestic activities.
Date	EH III: 3
References	Rutter 1995
Plan	Rutter 1995, Plan V

G44 Lerna house 3.6	
Preservation	Poorly preserved
Desertion	Later overbuilt by house 3.9.
Orientation	NE-SW, apse in the NW, entrance in the SW.
Lay-out	Apsidal, possibly two rooms.
Size	Ca. 23 m ² 3.7 x 3.7 = 14.1 2.4 x 3.7 = 8.7
Walls	Ca. 0.50 m wide
Floor	Unclear. But presumably hard packed earth.
Furnishings	-
Modifications	Two floors were identified.
Finds	No significant pottery deposits were found at any of the floor levels.
Activities	Special function, considering the size?
Date	EH III: 3
References	Rutter 1995
Plan	Rutter 1995, Plan V

G45 Lerna house 3.7	
Preservation	Poorly preserved
Desertion	Later overbuilt by house 3.10.
Orientation	N-S
Lay-out	Apsidal?, 2 rooms.
Size	Ca. uncovered / preserved for 8+ m ² 3.1 x 2.6 = 8
Walls	Ca. 0.35-0.50 m wide.
Floor	Unclear. But presumably hard packed earth.
Furnishings	-
Modifications	None?
Finds	Fragments of 2 bowls and a wide mouthed jar.
Activities	Special function, considering the size?
Date	EH III: 3
References	Rutter 1995
Plan	Rutter 1995, Plan V

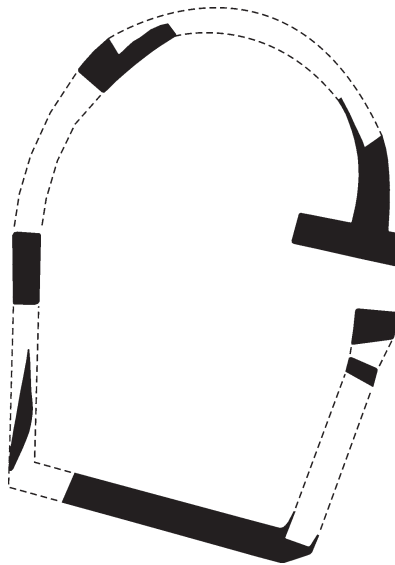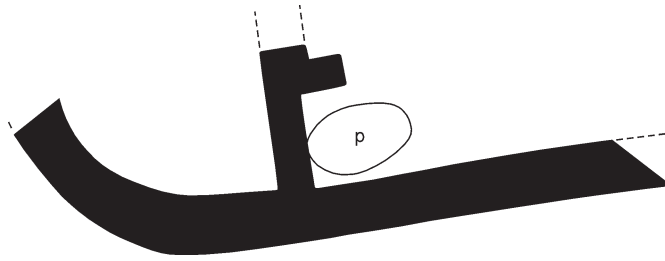


G46 Lerna house 3.8

Preservation	Poorly preserved
Desertion	Later overbuilt by houses 3.10 and 3.11
Orientation	NE-SW, with the rounded side towards the NE, and the entrance in the SW
Lay-out	D-shaped, 1 room
Size	Ca. 12 m ² 4.2 x 2.8 = 11.8
Walls	Ca. 0.25-0.50 m wide
Floor	Unclear. But presumably hard packed earth.
Furnishings	-
Modifications	Apparently between house 3.8 and 3.11 was an intermediate building. With this intermediate building bothros B-Ao might have been associated.
Finds	-
Activities	Unclear
Date	EH III: 3
References	Rutter 1995
Plan	Rutter 1995, Plan V

G47 Lerna house 3.4



Preservation	Moderately preserved. Later overbuilt by a smaller apsidal MH house, and partly cut through by a shaft grave.
Desertion	Abandoned? And overbuilt by MH house 99D.
Orientation	NW-SE, apse in the NW and entrance in the SE.
Lay-out	Apsidal, 1 room and an anteroom, or two rooms.
Size	56+ m ² 10.2 x 5.5 = 55.5
Walls	Ca. 0.50-1.20 m wide.
Floor	Floor level was observed, but not described.
Furnishings	Central hearth (not illustrated in published plan) and a bothros.
Modifications	None?
Finds	No substantial quantity of pottery was associated with the floor level. From bothros: fragments from 1 bass bowl, a bowl, a pithos and 4 wide mouthed jars. Metallurgical waste came from a bothros located in the apse. However, the association between the house and the bothros was not entirely certain.
Activities	Eating, drinking, storage, cooking.
Date	EH III: 3
References	Rutter 1995
Plan	Rutter 1995, Plan V

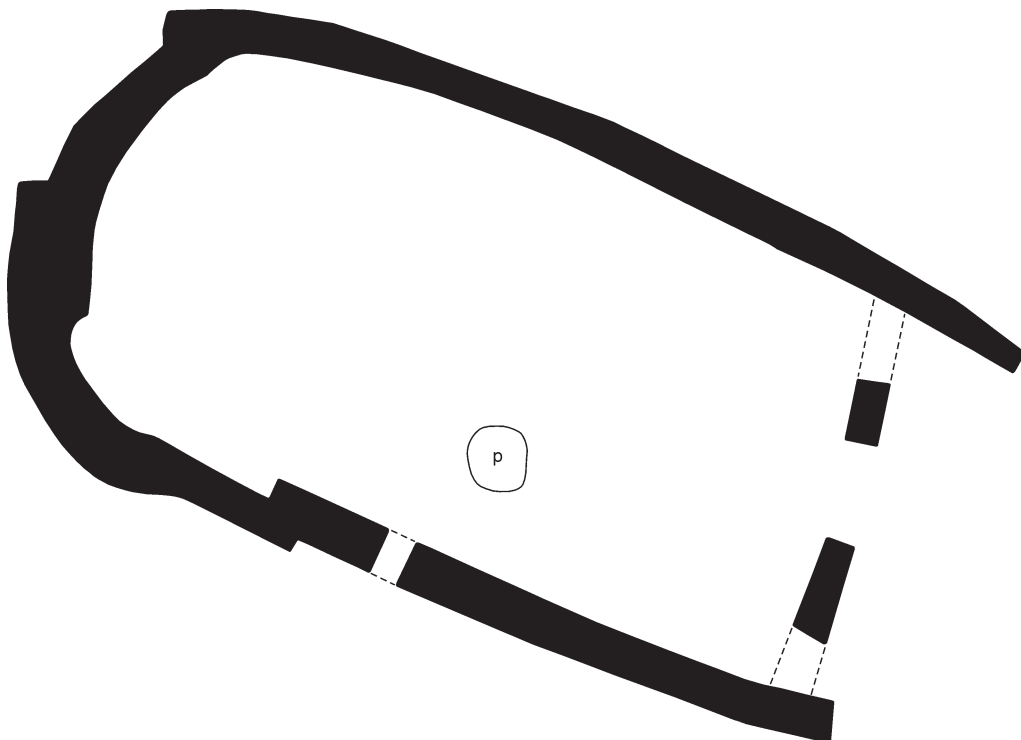

G48 Lerna house 3.5	
Preservation	Poorly, only a section of the southern part of the house is preserved.
Desertion	Possible levelling operation towards the MH period, and rebuilt.
Orientation	NW-SE, apse in the NW and entrance presumably in the SE.
Lay-out	Apsidal, at least two rooms
Size	40+ m ² 3.4 x 4.4+ = 15.1 5.6+ x 4.4+ = 24.5
Walls	Ca. 0.60-1.10 m wide
Floor	Unclear. But presumably hard packed earth.
Furnishings	-
Modifications	Two floor levels were identified.
Finds	From the earlier floor came fragments of a bass bowl, a bowl, a kantharos, a narrow necked jar, an Ouzo cup, a cup, a tankard and a wide mouthed jar. The sherds from the second floor were of mixed Lerna IV/V date, probably due to levelling operations.
Activities	Eating, drinking, storage, cooking
Date	EH III: 3
References	Rutter 1995
Plan	Rutter 1995, Plan V

G49 Lerna house 3.9	
Preservation	Poorly preserved.
Desertion	Deserted?
Orientation	NE-SW, with the apse in the NE, and the entrance presumably in the SW.
Lay-out	Apsidal, 1 room
Size	28+ m ² 6.9+ x 4.0 = 27.7
Walls	Ca. 0.35-0.50 m wide
Floor	Unclear. But presumably hard packed earth.
Furnishings	A bothros along the west wall. The bothros north of it perhaps post-dated the house.
Modifications	Two floors were identified.
Finds	No significant pottery deposits were found at any of the floor levels. From bothros: fragments of a wide mouthed jar, and a dark-on-light sherd.
Activities	?
Date	EH III: 3
References	Rutter 1995
Plan	Rutter 1995, Plan V



G50 Lerna house 3.10	
Preservation	Reasonable preserved. Part of the western side wall is missing.
Desertion	Deserted?
Orientation	NE-SW, with the apse in the NE, and the entrance presumably in the SW.
Lay-out	Apsidal, two rooms
Size	25 m ² 4.3 x 3.3 = 14.2 2.7 x 3.8 = 10.4
Walls	Ca. 0.35-0.70 m wide
Floor	Unclear. But presumably hard packed earth.
Furnishings	A bothros was associated with the earliest floor.
Modifications	Three successive alterations were seen in the east wall, and in the construction of three successive floors.
Finds	From bothros: fragments of a bowl and a wide mouthed jar, a stone pounder and a bone awl. Fragments of two bass bowls came from the latest floor.
Activities	?
Date	EH III: 3
References	Rutter 1995
Plan	Rutter 1995, Plan V

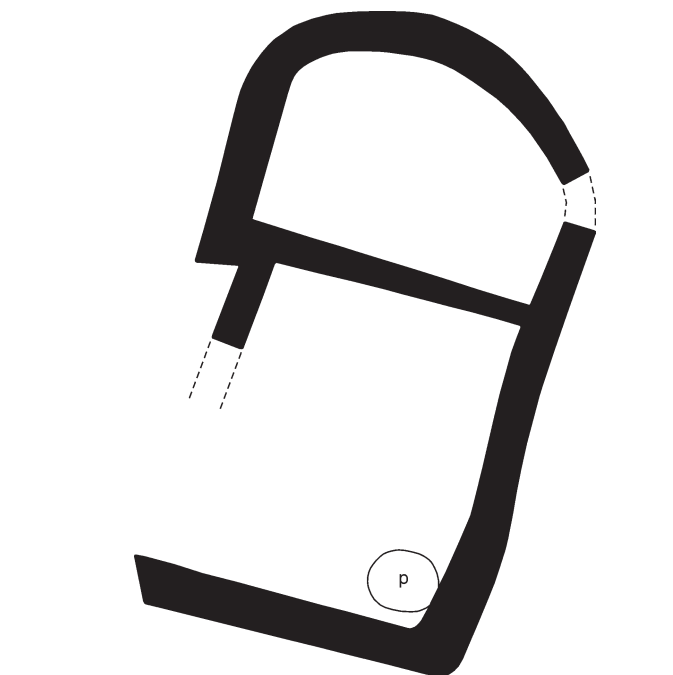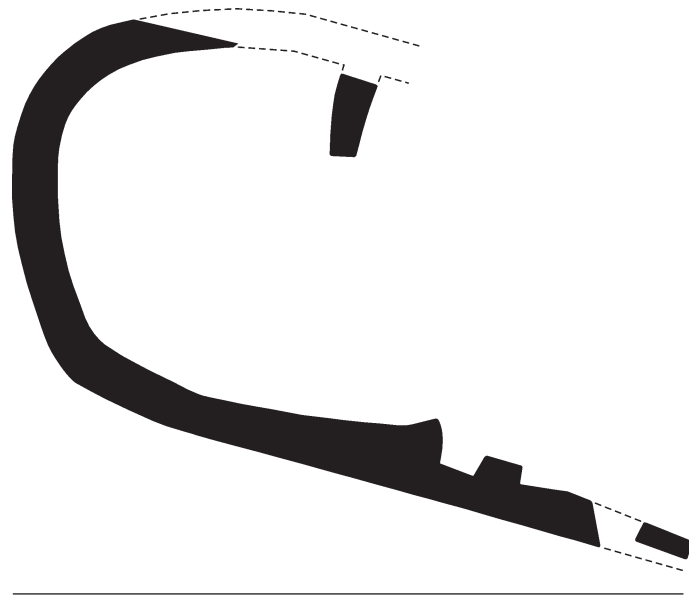

G51 Lerna house 3.11	
Preservation	Reasonable preserved. Part of the western and northern walls is missing.
Desertion	Deserted?
Orientation	N-S with the apse in the SSW, and the entrance presumably in the NNE.
Lay-out	Apsidal, two rooms
Size	20 m ² 2.4 x 3.6 = 8.4 3.2 x 3.6 = 11.4
Walls	Ca. 0.35-0.60 m wide
Floor	Unclear. But presumably hard packed earth.
Furnishings	Possibly a bothros.
Modifications	None?
Finds	From bothros: fragments of a cup, a kantharos and a jug.
Activities	?
Date	EH III: 3
References	Rutter 1995
Plan	Rutter 1995, Plan V


G52 Lerna house 3.12	
Preservation	Poorly preserved
Desertion	Deserted?
Orientation	NE-SW, with the apse in the NE, and the entrance presumably in the SW.
Lay-out	Apsidal, at least one room.
Size	13+ m ² 3.6+ x 3.6 = 12.7
Walls	Ca. 0.35-0.50m wide
Floor	No floors of either phases were preserved.
Furnishings	Two bothroi could belong to this house. A hard trodden area was located to east of the house. Here a hearth and another bothros were located, which were perhaps shared with house 3.13.
Modifications	Two periods of construction, as a wall was rebuilt.
Finds	Fragments of a narrow necked jar, dating to first period, but embedded in wall rebuilt in second period. From bothroi: fragments of 2 bass bowls, a cup, a jug and a pithos.
Activities	?
Date	EH III: 3
References	Rutter 1995
Plan	Rutter 1995, Plan V

G53 Lerna house 3.14	
Preservation	Poorly preserved
Desertion	Fire destruction
Orientation	N-S
Lay-out	Unclear, but seemingly two roomed.
Size	Uncovered for ca. 11+ m ² 0.4+ x 2.5 = 0.9 3.6 x 2.7 = 9.7
Walls	Ca. 0.35 m wide
Floor	Unclear
Furnishings	Perhaps a bothros along the partition wall.
Modifications	Unclear
Finds	Fragments of three bass bowls, a bowl, a cup, three jugs, a kantharos, a narrow necked jar, a pedestal footed cup, a pyxis, four rim handled cups, two tankards and four wide mouthed jars. In bothros: fragments of a kantharos, a bowl and a wide mouthed jar
Activities	?
Date	EH III: 3
References	Rutter 1995
Plan	Rutter 1995, Plan V

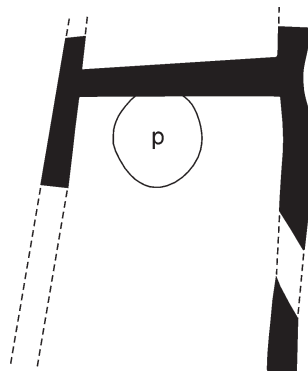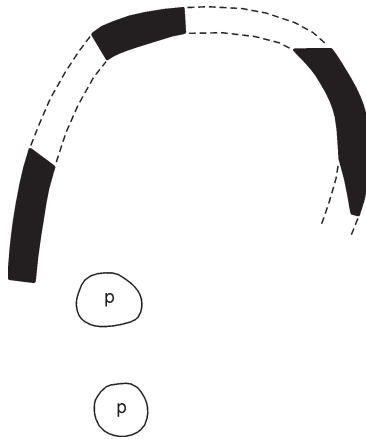


G54 Lerna house 3.15	
Preservation	Poorly preserved
Desertion	Unclear
Orientation	NW-SE
Lay-out	Unclear, but seemingly two roomed.
Size	Uncovered for ca. 7+ m ² 1.8+ x 2.5 = 4.4 1.2+ x 2.5 = 3.0
Walls	Ca. 0.35 m wide
Floor	Unclear
Furnishings	Unclear
Modifications	Unclear
Finds	A jug
Activities	?
Date	EH III: 3
References	Rutter 1995
Plan	Rutter 1995, Plan V

G55 Lerna house BC15	
Preservation	Moderately preserved, but only partly uncovered.
Desertion	Unclear, no details were published.
Orientation	NE-SW, with apse in the NW.
Lay-out	Apsidal, at least two rooms.
Size	Unclear., but at least 10 m long.
Walls	Unclear, no details were published.
Floor	Unclear, no details were published.
Furnishings	Unclear, no details were published.
Modifications	Unclear, no details were published.
Finds	remains of a pithos were found, and fragments of "Smear ware", coarse jars, and pithoi
Activities	All household activities?
Date	EH III: 3
References	Caskey 1957: 152, 1958: 127
Plan	Caskey and Blackburn 1997, Fig. 1





G56 Lerna house 99D	
Preservation	Moderately
Desertion	Deserted and rebuilt as house 98L, and again as 98A during next phase.
Orientation	NW-SE, with the apse in the NW, and the entrance possibly in the SE.
Lay-out	Apsidal, seemingly one room
Size	Uncovered / preserved for ca. 61+ m ² 5.3 x 11.4
Walls	Larger and smaller stones used, sometimes placed in two rows, ca. 0.45-0.60 m wide. Double row of flat stones with small stones and some larger ones piled up haphazardly on top. At the apse the wall was 0.75 m wide.
Floor	No floor was found.
Furnishings	-
Modifications	At least rebuilt once as house 98L, and subsequently rebuilt as house 98A. The house was built on top of EH III house 99C (listed here as house 3.4).
Finds	Ceramic finds from the house were mixed up with other lots (Deposit B 1497). So it is unclear what exactly belongs to the house. The same goes for the small finds. Ceramics from the deposit consist of Grey Minyan bowls, Matt Painted bowls, a few sherds of Lustrous Decorated jars, a fragment of Minoanizing Fine plain ware or a Minoan import, fragments of Dark Burnished (Black and Brown) ware, Smear ware, Coarse burnished ware, coarse burnished incised ware. Among the small finds were a stone shaft-hole hammer axe, flint and obsidian blades, and bone pins
Activities	Presumably all household activities.
Date	EH III-MH
References	Zerner 1980: 33-34; Milka 2010
Plan	Zerner 1978: Figure VI

G57 Lerna house 68A	
Preservation	Poorly, only partly excavated.
Desertion	Fell gradually into disrepair, and was eventually overbuilt by courtyard complex and rooms 44 and 45.
Orientation	NW-SE, with the apse in the NW, and the entrance possibly in the SE.
Lay-out	Apsidal, one room, but possibly two rooms as a small piece of partition (?) wall was excavated.
Size	Uncovered / preserved for ca. 41+ m ² (9.3+ x 4.40 m)
Walls	It seems that larger stones were used than in building 99D. Large stones were placed in two rows, with some space in between. Ca. 0.60 m wide.
Floor	Some patches of floor were preserved, but these were not described.
Furnishings	Hearth in the apse of 1.1 m. in diameter. Inside its rim were layers of stone with red and yellow clay and pebbles.
Modifications	At least rebuilt once, before replaced by courtyard complex and rooms 44 and 45.
Finds	Fragments of two or three pithoi inside the apse around the hearth. Deposit BE 435: Grey Minyan and Dark Burnished bowls, Gold Mica jar, two sherds of Matt Painted bowl and jug, fragments Lustrous Decorated jars and a Minoanizing cup. Much coarse ware, smear ware, coarse burnished knobbed jars, incised ware and pithoi, large jar of gold mica ware. Some EH III and Neolithic sherds. A bone pin, a basal-notch arrowhead and three pierced discs made out of EH II ring bases. One pithos was repaired with lead-clamps, of which at least 13 were preserved.
Activities	Eating, drinking, cooking and storage.
Date	EH III-MH
References	Zerner 1978: 120; Milka 2010
Plan	Zerner 1978: Figure VI

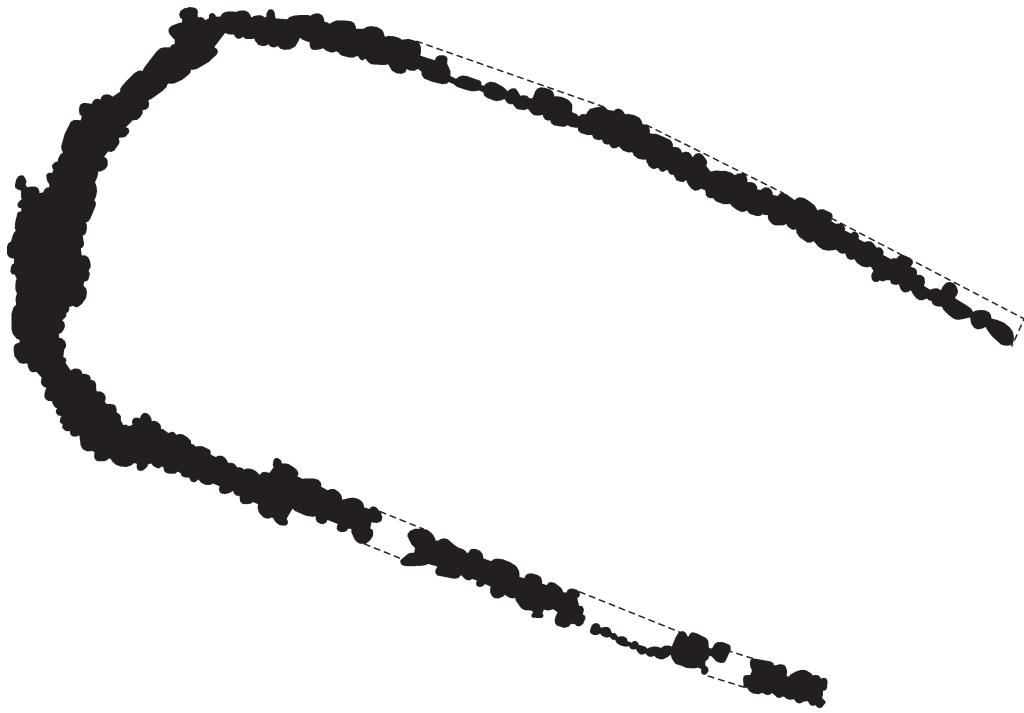


G58 Lerna house of the Pithos	
Preservation	Poorly, as only the eastern section is excavated.
Desertion	Destroyed
Orientation	NE-SW
Lay-out	Rectangular (?)
Size	Uncovered for ca. 7+ m ² 2.7+ x 2.4 = 6.5
Walls	Double row of large stones, with one or two rows of smaller stones. Preserved up to 0.57 m. Other section of the wall CE constructed with small stones and preserved up to 0.25 m. Wall CF preserved up till 0.19 m and carefully built of stones of the same size.
Floor	The first floor was identified but not described. Presumably hard packed earth. The second floor was not identified.
Furnishings	-
Modifications	Two phases of wall construction were identified, and also two occupation layers. Only one floor was identified.
Finds	Pithos in the north-eastern corner, set in yellow clay below the floor level. First floor: Grey Minyan bowls, Dark burnished bowls, EH III patterned ware, smear ware, coarse burnished ware, knobbed jars and incised ware. Second habitation, deposit 606: Mixed deposits, difficult to reconstruct. Among the finds some Grey Minyan, Dark Burnished in Brown, Black and Dull Red, Matt Painted wares, Smear and Coarse ware, and some EH III and Neolithic fragments.
Activities	Presumably eating and drinking (Grey Minyan) and definitely storage
Date	EH III-MH
References	Zerner 1978: 7-10, Caskey 1956: 148-151
Plan	Zerner 1978: Figure II

G59 Lerna house 98L – Area B	
Preservation	Poorly preserved, partly cut by a large Shaft Grave.
Desertion	Rebuilt as house 98A.
Orientation	Northwest-southeast
Lay-out	Presumably apsidal. At least one room and a portico, or two rooms.
Size	Unclear
Walls	Wall 97 H: Apse up to four courses, 0.52 m high and ca. 0.50 m wide. The lower courses were made of larger stones, the upper of smaller stones with here and there a large flat stone in between. The outer face was made of flat stones standing on one end, giving the appearance of orthostates. Wall 97 K: preserved to 0.15. Two courses of a double row of stones. Wall 98 L: single row of flat stone, few cm high.
Floor	The floor was removed or reused by later inhabitants/builders of 98A.
Furnishings	-
Modifications	None, though the house could be interpreted as a rebuilding of house 99D.
Finds	Combined lot B1497: Grey Minyan rounded bowls with everted rims and incised shoulders, Lustrous Decorated jars, and coarse burnished jars with incised rims. Eastern room, deposit B1247: Matt Painted angular cup (Zerner 1978, Figure 14).
Activities	Presumably all domestic activities.
Date	MH I (Lerna VA)
References	Zerner 1978: 35-36
Plan	Zerner 1978: Figure VII

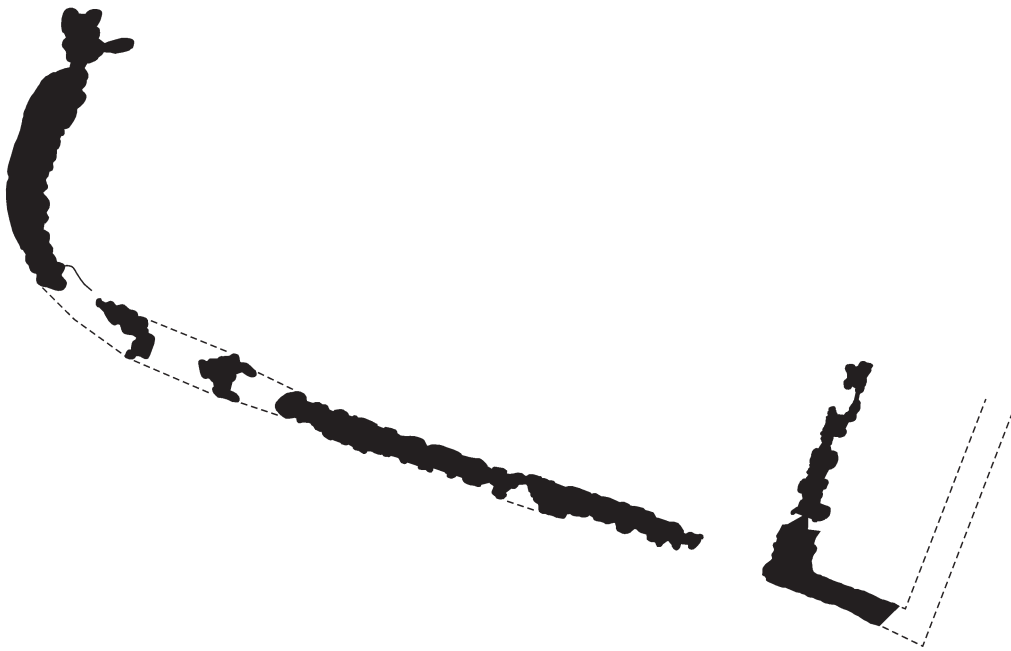


G60 Lerna house D – Area A	
Preservation	Moderately preserved. Eastern part damaged by military trench and southern side by a gun-emplacement.
Desertion	Destroyed by earthquake and rebuilt. Later destroyed by fire, and during MH rebuilt as house M.
Orientation	W-E, with the apse in the west, and the entrance presumably in the east.
Lay-out	Apsidal, two rooms.
Size	Uncovered for ca. 25+ m ² 3.9+ x 3.8 = 15 2.7+ x 3.8 = 10
Walls	Unclear how the walls were constructed, but they were not as well constructed as the foundation of the successor, house M. Here and there preserved till a height of 0.80 m. Ca. 0.50 m wide.
Floor	Presumably hard packed earth. A floor was identified and possibly one or two others somewhat higher.
Furnishings	Flat stone on the central axis, perhaps a base to support a column for the roof. In north-western section of the apse remains of an unfired vessel were found, surrounded by a paving of sherds, but no signs of burning. Its use is unclear, perhaps it was some kind of basin. A bothros was located in the south-eastern corner of the apse, belonging to the second phase of occupation.
Modifications	After damaging, perhaps due to an earthquake, the house was repaired, and the partition wall was extended over the whole width of the house, with an entrance in the middle. A bothros was associated with the second floor in the apse.
Finds	Pithos in eastern room set in the ground. Among finds 99 coarse clay beads and fragments of others. From the latest level of the house came a Minyan bowl, a Matt Painted jug with cut-away spout, Grey Minyan jar and a small crude stemmed coarse cup. At least one floor had Lerna VA ceramics: fragments of a Matt Painted jug, a Minoanizing Lustrous Decorated ribbed jug, Grey Minyan and Dark Burnished bowls and cups. Banks 1968: house A-D: Floor 3: bone pin, 92 intact terracotta beads and 34 fragments. Floor 4: bone awl, pin and scraper, terracotta pierced disc, terracotta whorl, unclear metal object
Activities	Eating, drinking, and storage.
Date	MH I (Lerna VA, earlier phases of Lerna V)
References	Caskey 1954: 6, Caskey 1955: 30-32; Zerner 1978: 46
Plan	Caskey 1955: 30, fig. 2

G61 Lerna house Q – Area A	
Preservation	Poorly preserved
Desertion	Unclear, as no details were published.
Orientation	N-S with the possible apse in the north and entrance in the south.
Lay-out	Possibly apsidal, with apse facing north. A partition wall in the middle of the house, and with an entrance at the western side, divided the house into two rooms, though earlier there might have been just one room.
Size	Ca. 15+ m ² Preserved: 3.20 x 4.00 – 5.00 m = 12.4-15.5 m ²
Walls	Unclear, as no details were published.
Floor	At least two floors were identified, but these were not described.
Furnishings	Unclear, as no details were published.
Modifications	Remodelled at least once, perhaps that in the first phase there was no partition wall. At least two floors identified.
Finds	It was commented, that no whole pots were found here.
Activities	Unclear, as no details were published.
Date	Approximately contemporary with house D, which was dated to MH I (Lerna VA, earlier phases of Lerna V).
References	Caskey 1954: 16-17
Plan	No plan

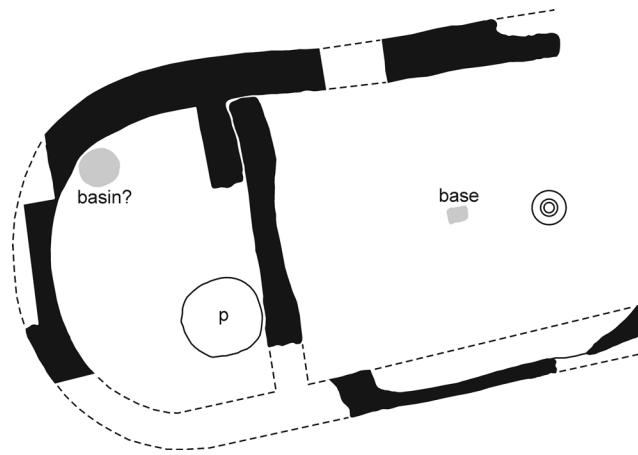


G62 Lerna posthole house – Area D	
Preservation	Moderately, also disturbed by later building activities during Lerna VA.
Desertion	Destruction deposit is mentioned, but it is unclear what type of destruction. Overbuilt by house BS during Lerna VA.
Orientation	E-W
Lay-out	Roughly rectangular lay-out. Possibly a wattle-and-daub structure.
Size	Uncovered for ca. 20+ m ² 5.1 x 3.9 = 19.6
Walls	Nineteen postholes of 15-18 cm in diameter and 25-30 cm deep. Some stones along the southern side were perhaps used for enforcement of the wall. The walls were possibly made of wattle-and-daub.
Floor	No floor was identified, but it was presumably of hard packed earth.
Furnishings	Ash area of 1.60 by 1.20 meter towards the north of the southern wall could be a cooking area. This is not indicated in the published plan.
Modifications	None apparently. It was a thin stratum, so presumably shortly inhabited. But the structure was succeeded by house BS, which could be considered a rebuilding of this house, regarding the same shape and orientation, though somewhat rough.
Finds	Disturbed stratum. Habitation/destruction deposit D 596: Grey Minyan rounded bowl or cup, Dark burnished rounded bowl, fragments of Dark burnished ware, Matt Painted Bichrome rounded bowls, three Lustrous Decorated jars and a jug. Coarse ware fragments of pithoi, smear ware, coarse burnished knobbed jars, and incised ware. Minoan imports: spouted jar, polychrome jar, jug, collar-necked jar, amphora, large jar and a flaks (see Zerner 1978, Figure 3). Small finds: two obsidian blades, two bone pins and a terracotta whorl.
Activities	Presumably all household activities.
Date	MH I (Lerna VA early)
References	Zerner 1978: 12-14 and 58-63
Plan	Zerner 1978: Figure II

G63 Lerna house 98A – Area B	
Preservation	Moderately, disturbed by later digging of bothroi and Shaft Grave .
Desertion	Destroyed by violent fire. Several graves are subsequently cut here, during the middle of the MH II until the transition to the MH III period. During the transitional MH III period houses 100 was constructed on top of the burials.
Orientation	NW-SE, apse in the NW, entrance presumably in the SE.
Lay-out	Apsidal, at least two rooms and a portico. Perhaps even three rooms. Room two was perhaps a basement, as the floor was lower than the walls; or the floor of house 98L was reused.
Size	Uncovered/preserved for ca. 29+ m ² Room 1: 4 x 3.25 = 13.00 m ² Room 2: 4.75 x 3.25 = 15.50 m ²
Walls	Wall 97 H of building 98L probably also used in this building Northern wall, 0.42 m wide, sturdy foundations of two rows of medium sized stones on the inner row, and larger stones on the outer row. Southern wall, only a few stones recovered of the first course. Partition wall, double row of small stones .
Floor	Lower than the walls, so perhaps re-use of the floor of house 98L. It is also possible that the rooms were actually basement rooms. But no description given.
Furnishings	In room 1: two storage bins (not indicated on published plan), and in the NW corner a rectangular clay structure (table/platform?). Under this structure was another structure, presumably a hearth.
Modifications	Various stages of rebuilding in room 1, considering the built up of the hearth and the clay structures or platform.
Finds	Room 1: Furnished with pithoi, among them a Matt Painted pithos. Deposit B1487: including Dark burnished cup, Gold Mica Matt Painted wide mouthed storage jar and a large jar, Coarse Matt Painted barrel jar, Mainland Lustrous Decorated jar. Two flasks, coarse burnished cup, coarse large closed jar, and a pithos. Minoan imports: collar necked jar, Room 2: at eastern end many whole large jars. Deposit B 1486: including fragments of Grey Minyan and Dark Burnished bowls, Matt Painted jug with cut-away spout, Gold Mica Matt Painted jar, and storage jar. Gold Mica storage jar. Mainland Lustrous decorated hole-mouthed jar. Coarse open mouthed jar. Cycladic import: Dark slipped and burnished bowl Small finds: lead clamps in sherds fragments and a terracotta whorl.
Activities	Storage and cooking.
Date	MH I Late (Lerna VA Late), and destroyed during MH II
References	Zerner 1978: 36-38, and 112-119
Plan	Zerner 1978: Figure VII)

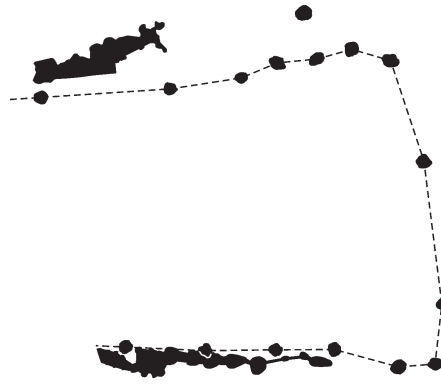



G64 Lerna rooms 44 and 45 – Area BE	
Preservation	Reasonable, but partly disturbed by the later digging of graves.
Desertion	Destroyed by violent fire. Several graves are subsequently cut here, during the middle of the MH II until the transition to the MH III period. During the transitional MH III period houses 100 was constructed on top of the burials
Orientation	NW-SE, entrance in the SW.
Lay-out	Rectangular. The rooms were presumably roofed considering the type of debris material.
Size	Room 44: unclear Room 45: 5.00 x 3.25 = 16.25 m ²
Walls	Wall room 45: 0.40-0.45 m wide and preserved up to 0.65 m.
Floor	Presumably hard packed earth.
Furnishings	Room 44: hearth towards the south which was protected on two sides by a wind screen. Room 45: brick storage bin against western wall. Stone with pivot hole in the NW corner of the entrance (not indicated on the published plan), and the entrance was made of two stone steps, and a wooden board on the side of the steps and on top of the bottom step.
Modifications	-
Finds	Room 44: embedded pithos east of wall 64. Deposit BE 426 from floor, many whole pots were mended up. Heavily incised amphoriskoi, some were pierced at the rim (Zerner 1978, Figure 17). Grey Minyan bowls and cup, Dark Burnished kantharos, Gold Mica Matt Painted closed jar, Gold Mica Red Slipped and burnished bowl, Mainland LD jars, Minoanizing LD spouted jug and hole-mouthed jar. Fragments of three flasks, coarse burnished cup and knobbed jar. Minoan imports: two amphoras, and a collar necked jar Small finds: two stone arrowshaft straightners, shaft-hole hammer axe and a bone pin. Banks 1967: (house BE-44) stone pounder, three arrow shaft straighteners, bored axe hammer, and two bone pins. Deposit BE 427 from outside the room: Grey Minyan stemmed bowl, Dark Burnished kantharos, Gold Mica Matt Painted bowl and jar, Mainland LD jars, Minoanizing fine cup, and a possibly imported white-painted red burnished bowl. Fragments of pithoi. Small finds: bone pin and a stone pounder/rubber. Room 45: two embedded pithoi. On the floor remains of smaller pithoi and many whole vessels. Eastern side of the room, deposit BE 429: Grey Minyan kantharos and bowl, Dark Burnished cup, rounded bowl, and kantharos. Mainland Lustrous Decorated jar, Minoanizing fine cup. Coarse burnished cup, and three knobbed jars. Coarse jar, and Coarse micaceous jar. Minoan import: amphora. Western side of the room deposit BE 430 disturbed by MH graves. Banks 1967 : (house BE-45): bone pin
Activities	Storage and cooking
Date	MH I Late (Lerna VA), and destroyed during MH II
References	Zerner 1978: 42-45 and Figure 17, and 128-132
Plan	Zerner 1978: Figure VII)

G63 and G64

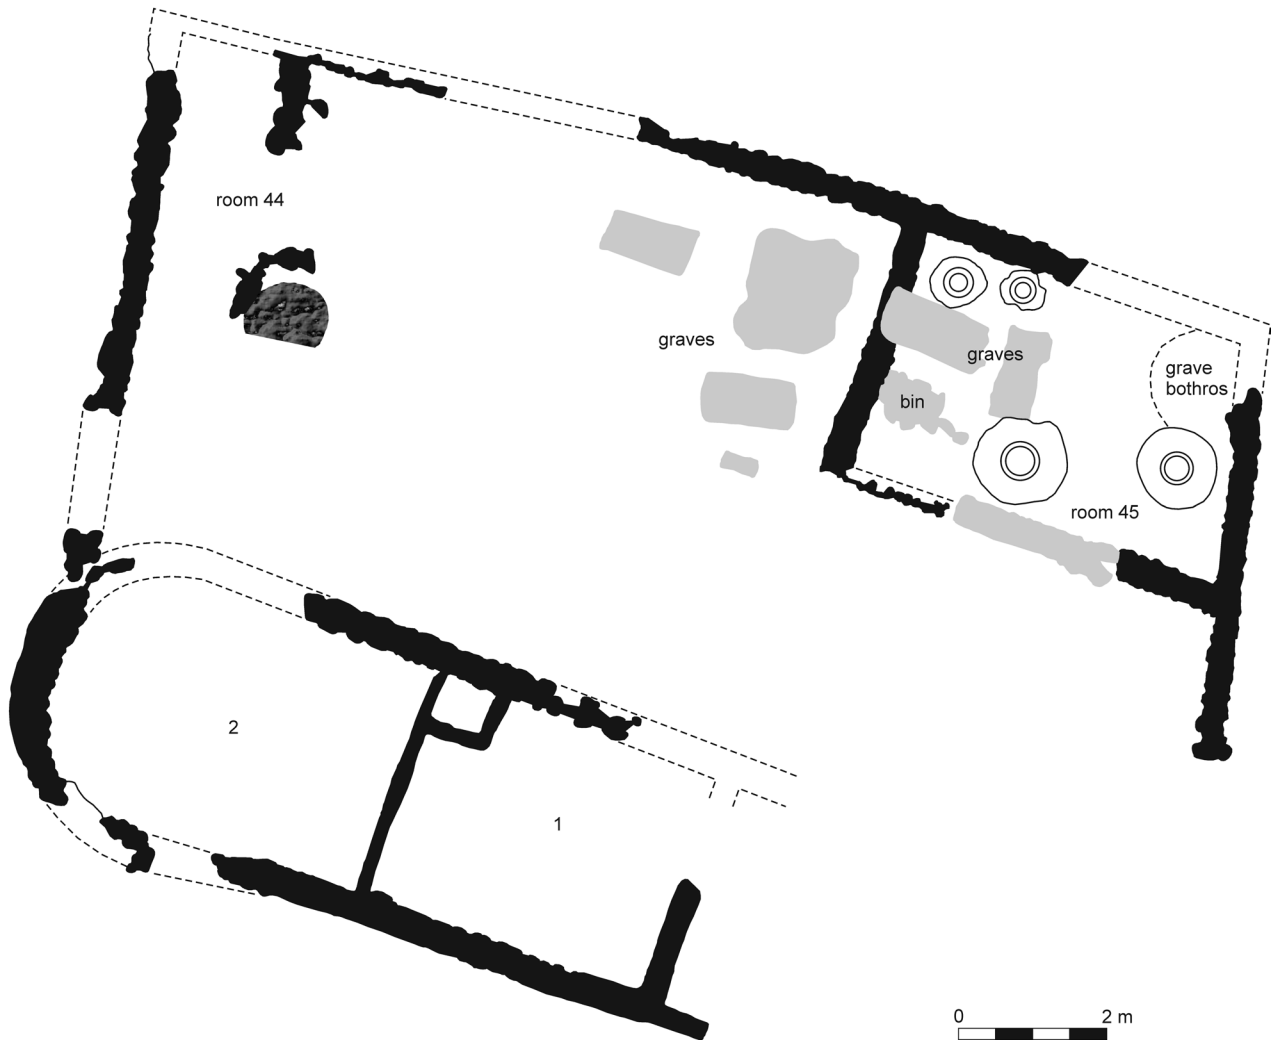



G65 Lerna house BS – Area D	
Preservation	Moderately, only the eastern side is excavated. Disturbance due to grave digging.
Desertion	Possibly destroyed by fire, as remains of burnt brick and carbonized wood were found.
Orientation	E-W
Lay-out	Rectangular (?). At least one room. Perhaps the house formed a courtyard complex together with structure BI towards the south, but too little is excavated to further explore this. The two structures seem to be connected with a wall, partitioning the area in between, which is designated as a courtyard, and was later turned into a street.
Size	13+ m ² 4.0 x 2.7
Walls	Eastern wall: six courses, 0.40 m wide and 0.60 m high. The lowest course is made of large stones and boulders, and the next three courses of smaller rounded stones and interspersed with angular stones. The upper course is made of rounded elongated stones, which is also called potato masonry. Some mud plaster is found here and there. Southern wall: constructed like wall BS, 0.36-0.40 m wide and 0.56 m high, four courses. Northern wall: potato masonry, 0.40 m wide and 0.65 m high.
Floor	Two floors identified but not described.
Furnishings	-
Modifications	At least two floors identified. At some time, perhaps when the second floor was made, the area around the house was levelled and a street was made. The house was overbuilt by house BJ, but as illustrations are lacking, it remains unclear if BJ should be considered a rebuilding of BS.
Finds	First floor D 594: two whole pots in situ, a storage jar in the north-western area, and a storage jar embedded in the floor on the north-eastern corner. Grey Minyan bowl, flask (?), Dark burnished cup/bowl, rounded cup, Matt Painted jar, and jar/bowl, Bichrome bowl, possible Gold Mica Matt Painted jar, Mainland Lustrous Decorated jars, Minoanizing Lustrous Decorated ribbed jug, Minoanizing fine cup. Minoan imports: Light on Dark cups, and a large jar Cycladic imports: Two Dark slipped and burnished bowls, coarse burnished bowl, and fragments of two jars, a knobbed jar and a pithos/jar. Small finds: two bone pins, and a bone awl Second floor deposit D 431: Grey Minyan, Dark burnished, Gold Mica Red Slipped and burnished bowl, Mainland Lustrous Decorated fragments of jars. Minoan imports: cup, a bowl and a large Dark on Light decorated jar (Deposit D 591 is not listed, as it is found above the floor) Banks listed the following small finds of room D-BS: three bone awls, five bone pins and a pierced terracotta disc.
Activities	
Date	(EH III-) MH I (Lerna Transitional IV-V and early VA)
References	Zerner 1978: 15-19 and 69-74, 75-76
Plan	Zerner 1978: Figure III

G66 Lerna house 18	
Preservation	Poorly preserved. Two wells of later date were partly dug through the floor.
Desertion	Unclear, as no details were published.
Orientation	N-S
Lay-out	Unclear, due to limited preservation, but it seems at least two rooms.
Size	Unclear, due to limited preservation. Ca. 2.70 m wide.
Walls	Ca. 0.65 m wide.
Floor	Unclear, as no details were published.
Furnishings	Unclear, as no details were published.
Modifications	Unclear, as no details were published.
Finds	A number of whole pots were recovered, which were of later date than the stage of Lerna VA represented by house 20. Small finds mentioned by Banks: bronze chisel, pin, and two daggers. Stone pierced disc, and two bone pins.
Activities	Presumably all domestic activities?
Date	MH I
References	Zerner 1978: 30
Plan	Zerner 1978, Figure V

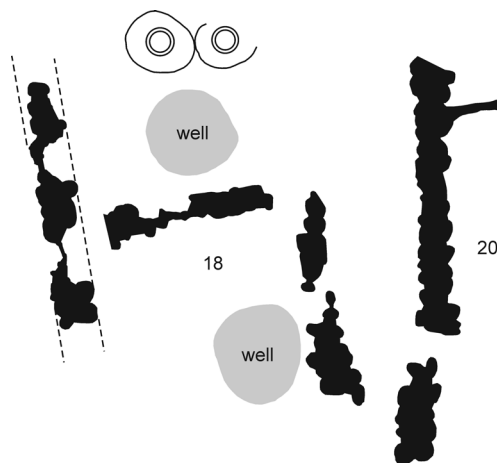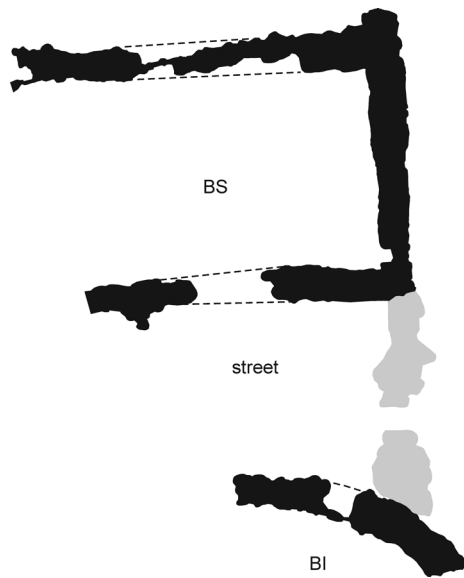


G67 Lerna house 100	
Preservation	Moderately preserved, considering the drawing of the remains.
Desertion	Destroyed
Orientation	NW-SE
Lay-out	Rectangular, small room in the NW and a larger main room in the SE. Possible attached smaller rooms on the SE.
Size	Unclear, but considering drawing the house seems to have been 11.70 m in length, and at least 3.70 m in width. This would be a total size of at least 43 m ² .
Walls	Unclear, as not details were published.
Floor	Unclear, as not details were published.
Furnishings	On central axis were a posthole (not indicated in published plan) and a hearth,
Modifications	Remodelled and extended at least twice,
Finds	Banks, (house BE-100): two stone arrowheads and a stone chisel. No intact domestic assemblage has been found in the house.
Activities	Unclear
Date	Constructed during MH II/III, destroyed during MH III
References	Caskey 1957: 148; Milka 2010
Plan	Milka 2010, Fig. 5


G68 Lerna house M – Area A	
Preservation	Moderately preserved.
Desertion	Four times (!) destroyed by fire. It seems that after the last destruction the area was used for burials.
Orientation	East-west. Apse in the west and entrance presumably in the east, and possibly later (also) from the south into the main room.
Lay-out	Apsidal, during latest phase two rooms and a porch, or three rooms. During an earlier phase, the layout might have consisted of a partitioned apse and main room.
Size	Uncovered / preserved for ca. 41+ m ² 3.2+ x 4.5 = 14.2 4.4 x 4.5 = 19.4 1.6 x 4.5 = 7.2
Walls	At the bottom of the walls were large flat stones in about six irregular courses high. Above these were much smaller stones set sloping inward from each side. Later partition wall made of large blocks in the east face and smaller stones in the west face. Ca. 0.35-0.50 m wide, and preserved till a height of 0.80 m.
Floor	Four floors identified, presumably made of hard packed earth. The third floor had flat slabs on the floor, but these could also have fallen from above.
Furnishings	Floor 1: rubbish pits and hollows with ashes which were perhaps hearths. Floor 3: flat slabs on the floor. In Room C a child skeleton. Floor 4: additions were built against the east faces of the apse and the western partition wall, perhaps for the support of furniture or vessels. None of the furnishings were depicted in the published plan.
Modifications	Several phases of occupation, as at least four floors were identified. During an earlier phase, the layout might have consisted of a partitioned apse and main room: the eastern partition might be later as it does not bond with the northern wall. Part of the south wall could also have been added later.
Finds	Floor 1 in apse: hoard of ten flints. bone whorl and terracotta whorl, pieces of mother of pearl, two cups, a small bowl, a large basin, goblets, Grey Minyan ware, a spouted vessel, a large Matt Painted jar, another painted jar and a small cup. Floor 2 in apse: knuckle bones Floor 3: bone awl, bone whorl, and worked horn (Banks) Floor 4: worked horn, terracotta pierced disc and whorl.
Activities	Eating, drinking, cooking, perhaps also storage.
Date	MH II (Lerna VC)
References	Caskey 1954
Plan	Caskey 1954, Fig. 2

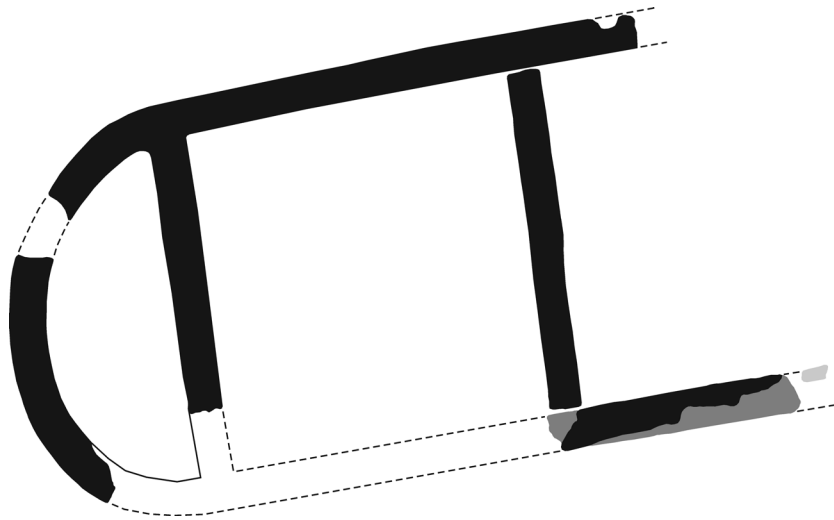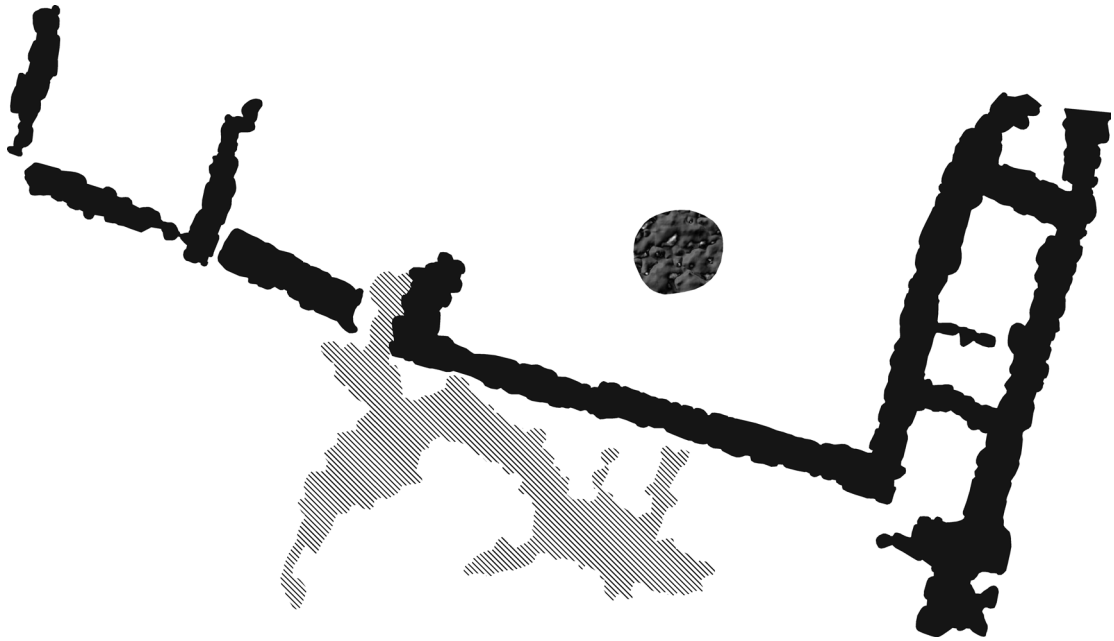

G69 Mycenae	
Preservation	Moderately preserved
Desertion	Unclear
Orientation	N-S
Lay-out	Rectangular, three rooms / two rooms and an entrance area
Size	Total size ca. 27m ² Room 1: 1.90 x 3.10 Room 2: 2.50 x 2.80 Room 3: 5.00 x 2.80
Walls	Seemingly at least 0.50 m wide.
Floor	Made of yellowish clayey soil.
Furnishings	A rectangular hearth (0.80 x 1.25 m) (not rendered in the published plan)
Modifications	Unclear
Finds	Unclear
Activities	Unclear
Date	MH III–LHI
References	Ergon 1961: 156-162; Lambropoulou 1991
Plan	Orlando 1962: Fig. 159


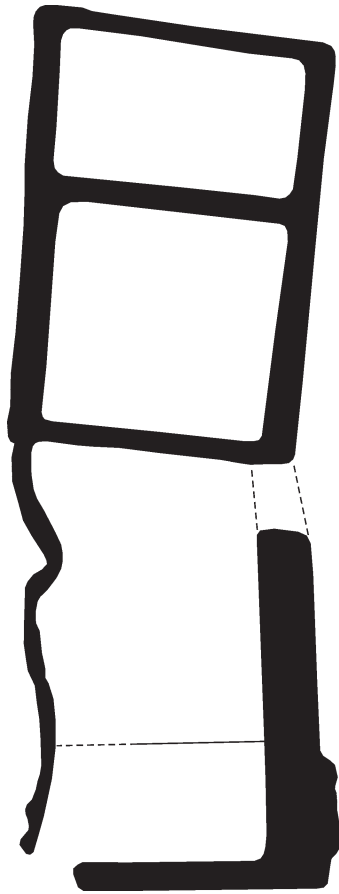


G7o Tiryns room complex 142-144	
Preservation	Poorly, only the eastern section is excavated. Very disturbed by later building activities.
Desertion	Destroyed in a fire. Later overbuilt by other houses.
Orientation	Possibly NW-SE, entrance in the north, also entrance in the east.
Lay-out	Presumably rectangular. A corridor and several narrow elongated rooms were uncovered, as well as a larger, possibly central room.
Size	Excavated part is 190 m ² .
Walls	Well-preserved wall consisted of two rows of stones with smaller stones in between. Ca. 0.63-1.00 m wide.
Floor	Floor paved with mud bricks.
Furnishings	Two hearths, one in room 142 and one in room 143
Modifications	Perhaps a reconstruction of the EH II predecessor complex 180-183 which was also destroyed in a fire.
Finds	Room 141: two sherds of wheelmade Fine Grey Burnished ware, perhaps jugs Room 143: clay bobbins Room 144: pithoi remains
Activities	Storage and possible weaving. Presumably also eating / drinking and cooking.
Date	EH III: 1
References	Kilian 1981; Kilian 1982; Weisshaar 1981; Weisshaar 1982; Weiberg 2007
Plan	Kilian 1981 Abb. 45

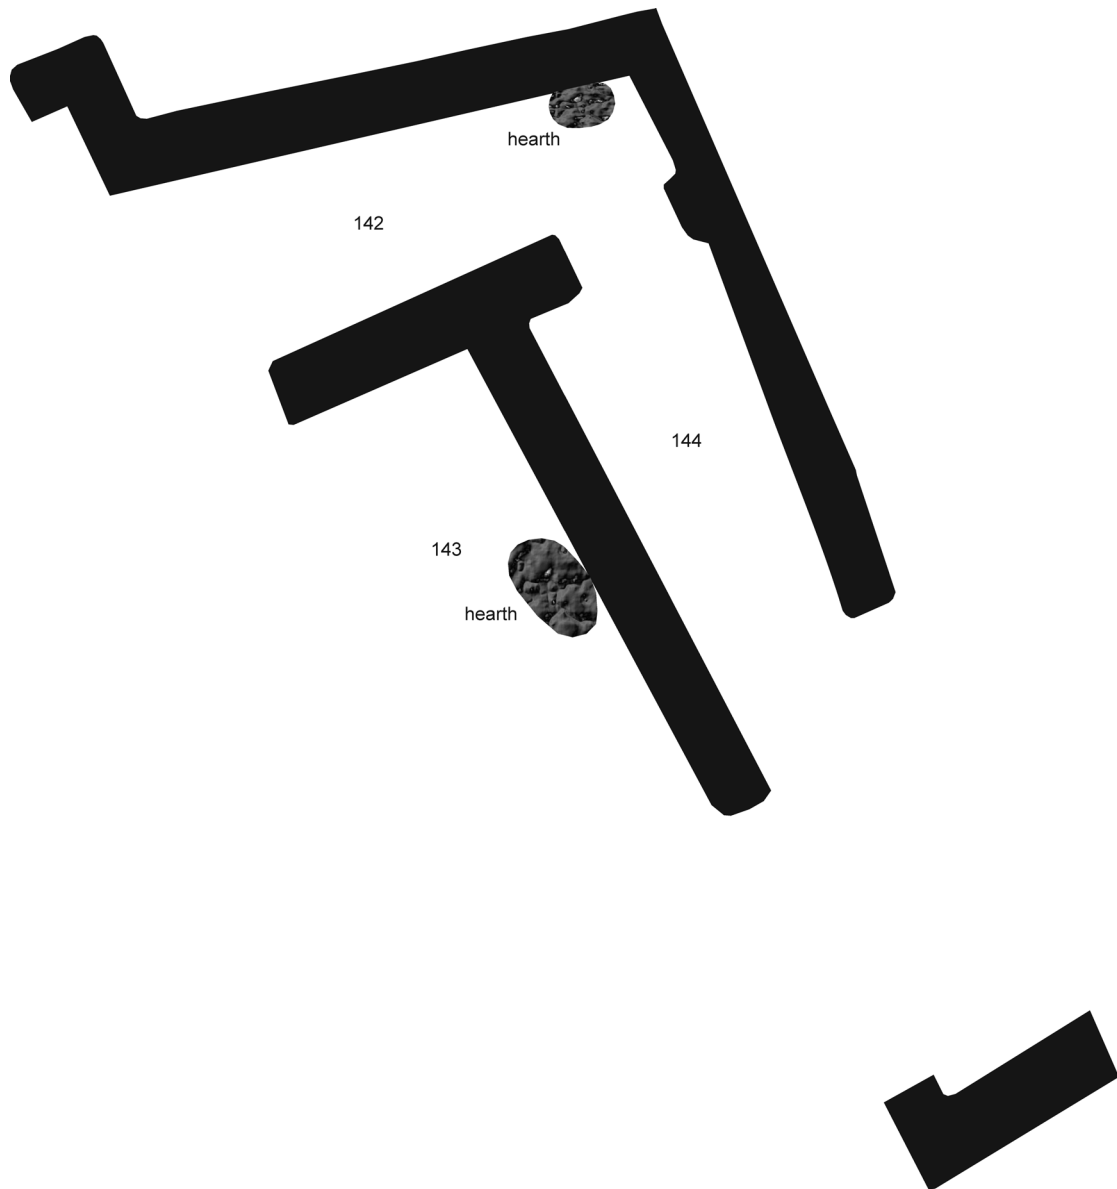



G71 Tiryns house 165	
Preservation	Poorly, only the apse and part of the main room are excavated / preserved.
Desertion	Unclear
Orientation	SW-NE, with the apse facing SW.
Lay-out	Apsidal, at least two rooms.
Size	71+ m ² (at least 7.50 wide and 9.50 long)
Walls	The main walls are four stone rows, and the partition wall two rows. Ca.1.50 m wide. At least four courses were preserved.
Floor	Unclear
Furnishings	Unclear
Modifications	-
Finds	Two sherds, one incised (Kilian 1979: 408, Abb. 32, 8. 9)
Activities	Unclear
Date	EH III
References	Kilian 1979, 1981, 1982; Weisshaar 1981, 1982; Weiberg 2007
Plan	Kilian 1982, Abb. 39

G72 Tiryns house 168	
Preservation	Poorly, only the apse and part of the main room are excavated / preserved.
Desertion	Unclear
Orientation	NW-SE, with the apse facing NW.
Lay-out	Apsidal, at least two rooms
Size	69 + m ² (at least 7.70 m wide and 9.00+ m long)
Walls	Unclear
Floor	Unclear
Furnishings	At least 1 bothros, 0.98 m deep (not indicated in the published plan).
Modifications	Here were four succeeding building phases, but the early phases are all EH II in date (the observation that house 168 had four successors is not rendered in a very clear way by Kilian. Weiberg (2007: 126) understands that the house had four successors, one built on top of the other making use of the same walls, within EH III, hereby referring to Kilian 1982: 420. The top layers of the house were EH III in date, and contemporary to the predecessor of 161, which is presumably an EH III house. However, the other layers seem to be EH II in date, as described by Kilian (1982: 420-424) in the next pages). Perhaps that the different building phases coincide with horizons 10-13.
Finds	In the bothros: ash remains, Fine Grey Burnished ceramics, a Cycladic or Trojan cup, pithos fragments, a grindstone, a bone needle and animal bones. On the floor: sherds of a decorated / stamped pithos. Below the apse on a level without architecture: stone pyxis, with four long stone tools, several pebbles and a terracotta spindle whorl. This assemblage is dated to EH III.
Activities	Eating, drinking, storage, food preparation
Date	EH III
References	Kilian 1981, 1982; Weisshaar 1981, 1982; Weiberg 2007
Plan	Kilian 1982, Abb. 39

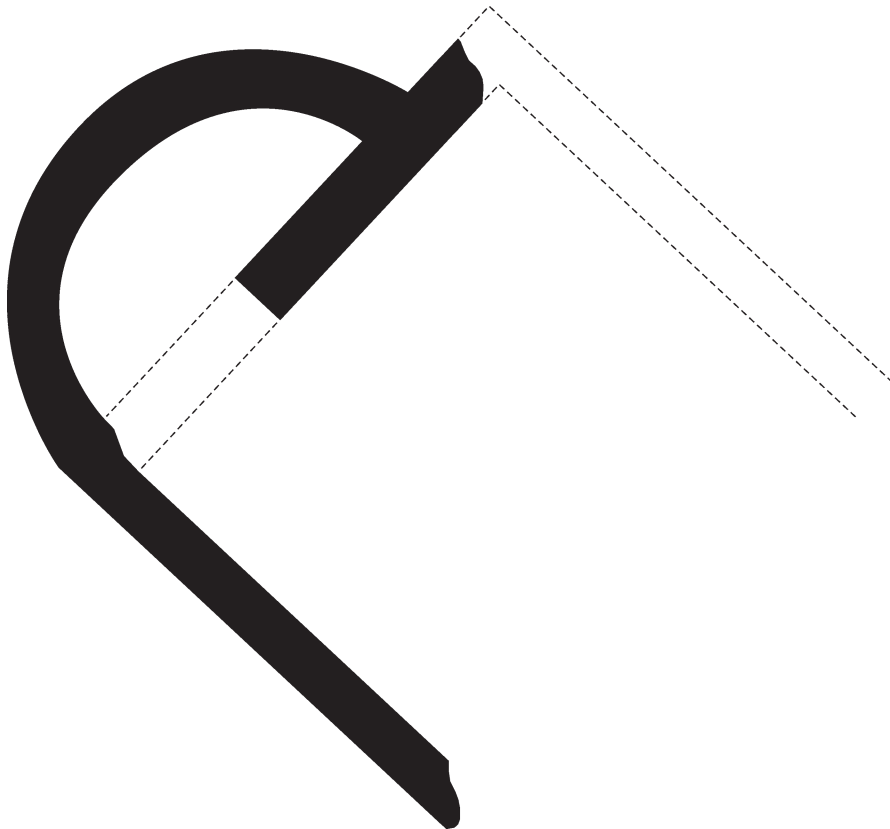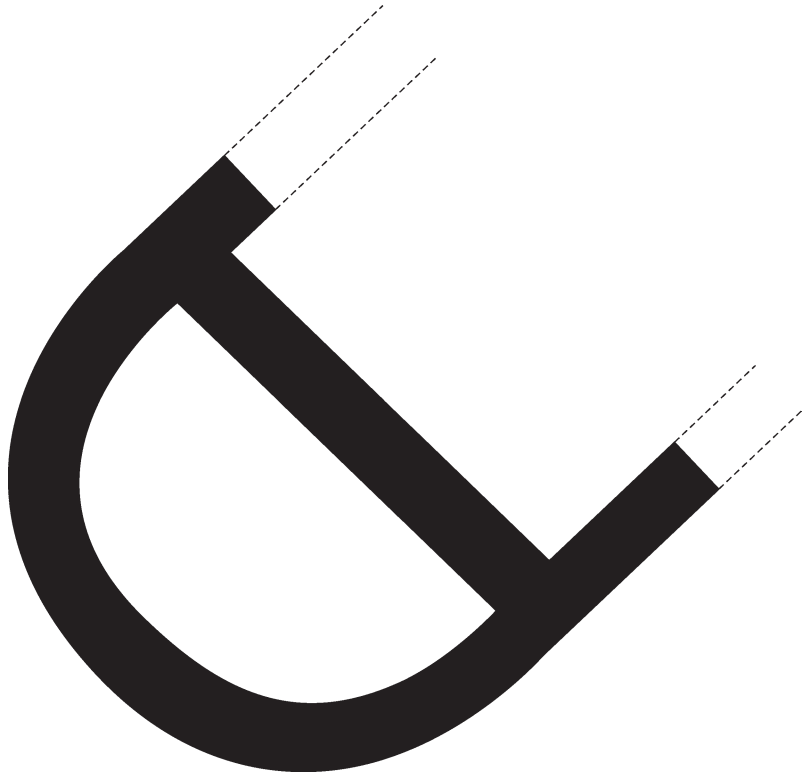

G73 Tiryns house 44	
Preservation	Poorly preserved, heavily overbuilt during later phases
Desertion	Unclear
Orientation	NE-SW, unclear where the entrance was located.
Lay-out	Rectangular, double megaron, or a court area towards the south partitioned by wall 55.
Size	Uncovered for ca. 29+ m ² (possible court area not included) Western room: 4.0+ x 3.45 = 20 m ² Eastern room: 1.8 x 3.45 = 9 m ²
Walls	The walls are made of small rounded stones, four courses high, and preserved to a height of 0.40 m. Width of the walls is 0.40-0.45 m.
Floor	Clay floor
Furnishings	A grave in the central room that might be contemporary with the house (not indicated in the published plan).
Modifications	Unclear
Finds	Unclear
Activities	Unclear, presumably all domestic activities.
Date	MH
References	Müller 1930, Tiryns Band III; Gercke and Hiesel 1975: 89-117; Lambropoulou 1991
Plan	Gercke and Hiesel 1975: Tafel 6A

G74 Tiryns eastern house – trench F	
Preservation	Poorly preserved, only the northern section is excavated.
Desertion	Unclear
Orientation	NE-SW, entrance presumably in the SW.
Lay-out	Rectangular (?), two elongated rooms of 2-3 meters in width, and a possible third. Length of the rooms is unclear though. A small structure seems attached to the northwest. However, its relation to the building remains unclear (see also catalogue G75).
Size	Uncovered for ca. 32+ m ² . The length of the three rooms is 1.90 m, 3.20 m and 2.20 m, while the preserved width is 4.30 m.
Walls	Irregularly laid larger and smaller stones used. Ca. 0.40-0.50 m wide.
Floor	At least partly stone paved.
Furnishings	-
Modifications	-
Finds	-
Activities	Presumably all household activities.
Date	MH III–LH I
References	Gercke and Hiesel 1971: 7-8
Plan	Gercke and Hiesel 1971: Beilage 4

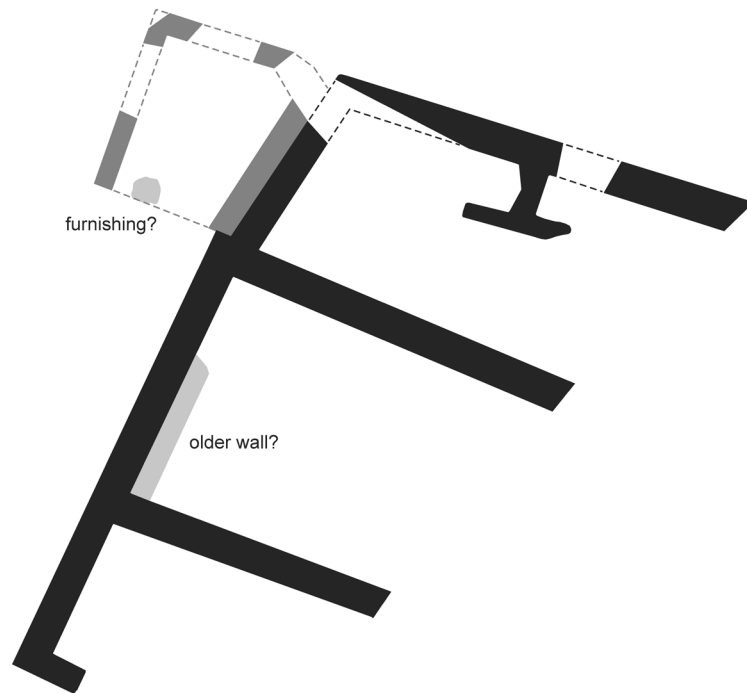
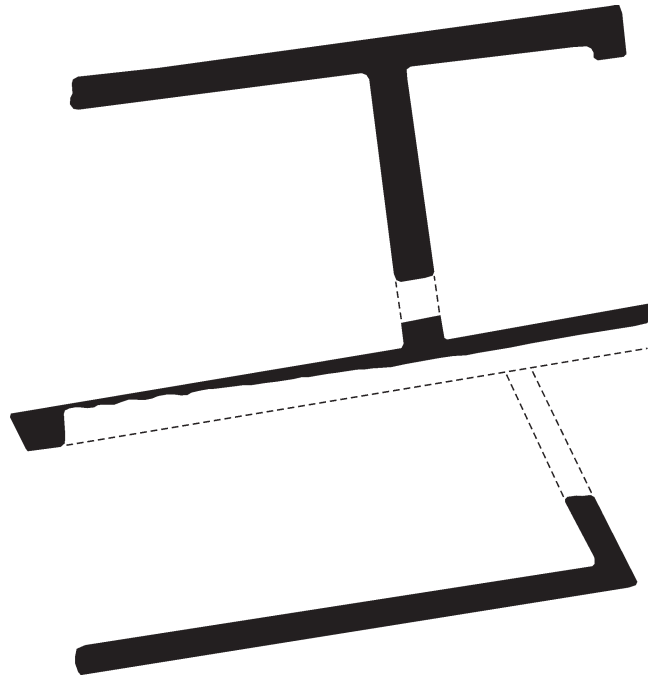


G75 Tiryns western house – trench F

Preservation	Reasonably preserved
Desertion	Destroyed by fire, leaving a debris layer of 50 cm. On top of the first floor also fire remains.
Orientation	NE-SW, entrance presumably in the SW.
Lay-out	Rectangular, two rooms and presumably an entrance area in the front, or a third room. A small structure seems attached to the northeast of the house. However, its relation to the building remains unclear (see also catalogue G74).
Size	Ca. 44+ m ² uncovered Northern room: 2.4 x 4.3 Main room: 7.6 x 4.4
Walls	Irregularly laid larger and smaller stones used. Two rows can here and there be seen. Ca. 0.50-0.60 m wide.
Floor	Second floor (LH I/II ceramics): Matt Painted ceramics Southern room: clay floor and stone plaster Western section main room: clay floor and stone plaster First floor (MH/LH I ceramics): Matt Painted, Polychrome and Kamares ceramics Main room: partly clay floor, partly stone plastered
Furnishings	None mentioned. However, in the plan a rectangular feature is seen in the middle of the main room. Perhaps this was a base for the support of a column?
Modifications	New clay /stone plastered floor after fire. It seems that the partition wall is also moved further towards the east.
Finds	Upper floor: Matt Painted and LH I/II ceramics In the NW most room a cooking pot in the eastern side of the room. Lower floor: Matt Painted ceramics and Kamares ware according to Gercke and Hiesel. But according to Lambropoulou, among the sherds are a LH I style sherd, and an "Aeginetan" Polychrome krater, that should date to LH I.
Activities	Presumably all household activities.
Date	MH III-LH I according to Gercke and Hiesel 1971: 7-8 LH I according to Lambropoulou 1991: 270
References	Gercke and Hiesel 1971; Lambropoulou 1991
Plan	Gercke and Hiesel 1971: Beilage 4

G76 Tiryns house D2 – trench H


Preservation	Poorly preserved, also disturbances due to graves.
Desertion	Destroyed by fire and overbuilt by LH IIB house D1.
Orientation	N-S, entrance is in the middle of the southern wall, marked by a threshold stone.
Lay-out	Rectangular. At least two rooms, but presumably more attached side rooms.
Size	Ca. 21 m ² Northern room ca. 9.5 m ² (2.20 x 4.30) Southern room ca. 11.2 m ² (2.60 x 4.30)
Walls	It seems the foundations are made of small stones irregularly laid into two-three rows.
Floor	Towards the north of the northern walls is a floor made of slabs and pebbles.
Furnishings	-
Modifications	Rebuilt/overbuilt in LH IIB as house D1.
Finds	Yellow Minyan with and without decoration, and Polychrome ceramics. In layers below the house the proportion of Grey Minyan ware increased.
Activities	-
Date	MH III-LH I according to Gercke and Hiesel LH I according to Lambropoulou 1991: 272
References	Gercke and Hiesel 1975: 18-26; Hiesel 1977; Lambropoulou 1991
Plan	Gercke and Hiesel 1975: Beilage 4

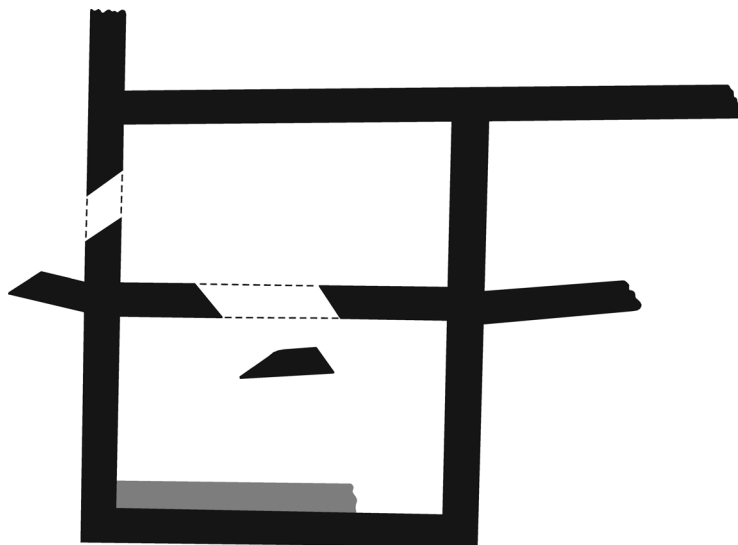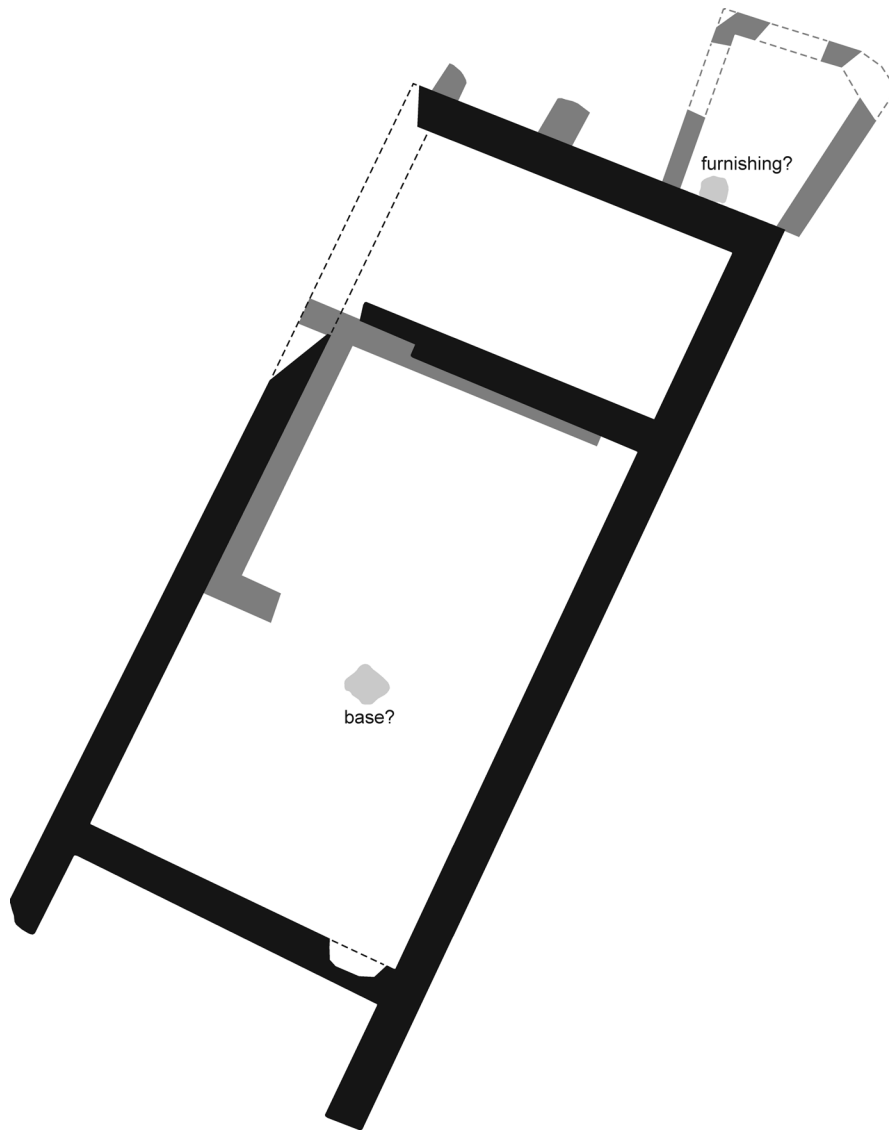

Catalogue H Laconia



Ho1 Agios Stephanos house Alpha IV	
Preservation	Poorly preserved, only part of the apse and the southwestern wall were uncovered.
Desertion	Eventually the whole house was destroyed, due to an unknown cause.
Orientation	NW–SE, with the apse in the north-west.
Lay-out	Apsidal, 1 room, with an entrance area.
Size	Ca. 27 m ² uncovered, the main room seems at least 9.00 m long and 3.00 m wide.
Walls	Made of two rows of stones, with smaller stones between. Wall width of 0.55–0.80 m.
Modifications	During MH I Late, the apse collapsed and a new apse was constructed, which was moved towards the northwest to create more space.
Floor	A hard surface.
Furnishings	-
Finds	Possible MH vessels listed by Taylour (1972): a local Minyan bowl, a wide carinated basin, a baking pan and a straight sided bowl.
Activities	Presumably all household activities.
Date	MH I Early–MH I Late
References	Taylour 1972: 239–243
Illustration	After Taylour 1972, figure 3

Ho2 Agios Stephanos house Nu 1	
Preservation	Reasonable well preserved, but not completely excavated. Only the apse and part of the main room were uncovered.
Desertion	The interior of the building was entirely sealed by an undisturbed fire destruction deposit..
Orientation	NW–SE, with the apse in the north-west.
Lay-out	Apsidal, at least two rooms.
Size	Uncovered for at least 22+ m ² Apse: 1.30 m deep and 4.50 m wide Main room: at least 3.50 m deep, 4.50 m wide
Walls	Irregular built walls. Use of small and large stones, placed in different techniques. The lower courses were constructed of larger stones than the higher courses. The walls were plastered. Walls were 0.40–0.65 m wide, and preserved for up to 1.00 m high. The partition wall was made of pisé and ca. 0.40–0.50 m wide.
Modifications	-
Floor	The floor was made of soft white earth.
Furnishings	Three pits, which were perhaps used for the support of beams for the roof.
Finds	Apse ceramics: almost complete: 3 cups, two-handled jar, 2 flasks, jug, 2 wide mouthed jars. Fragments of 4? Bowls, 2 cups, 1 narrow necked jar, 5 wide mouthed jars, 3 jugs and 1 pithos. Of these ceramics a narrow necked jar, bowl?, and a cup are Minoan, and another jar/jug possible too. Apse small finds: bone pin, fragments of a clay crucible, eight pierced cockle shells probably from a necklace. In a jar were remains of at least 3 eels. Main room ceramics: 9 bowls, 4 cups, 2 flasks, 1 narrow necked jar, 5 wide mouthed jars, 3 jugs. One of the jugs is Minoan. Main room small finds: bone pin, terracotta whorl, two terracotta spools, and fragments of a clay crucible. Rutter and Rutter (1979) published ceramics from structure Nu 1, as Deposit A. Ceramic wares represented in this deposit are Lustrous Decorated, Dull Painted, Oatmeal Minoanizing, fine Minoanizing, Dark Minyan and Coarse ware.
Activities	Presumably all household activities.
Date	MH I Late
References	Rutter and Rutter 1979, Taylour and Janko 2008
Illustration	After Taylour and Janko 2008, figure 1.66

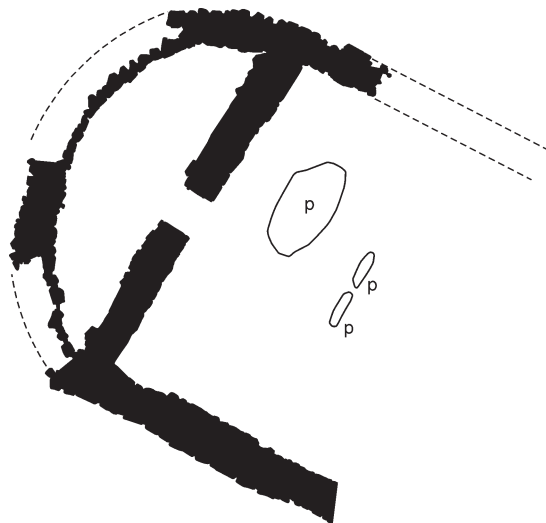


Ho3 Agios Stephanos structure Delta III	
Preservation	Poorly preserved. Several walls were uncovered, but it is not entirely clear if these walls formed one or several structures.
Desertion	Presumably deserted?
Orientation	NW–SE
Lay-out	I am not fully convinced by the reconstruction in Taylour and Janko. Walls bm and bl are differently constructed and wider than walls bb, ba and bi. I think it more likely that bl and bm formed a structure with western walls be and bg which were parallel to wall bl. This is also suggested by Taylour 1972: 244. However, according to Taylour and Janko a street was located between bg and be.
Size	Uncovered for at least 23 m ² . 2.4 wide, according to Taylour and Janko at least 9.70 m long.
Walls	Walls bl, bm, be and bg: Two rows of stones, with sometimes smaller stones in between. Sometimes one stones covered the whole width of the wall. 0.50–0.70 m wide. Walls ba, bb, and bi: one or two rows of stone. 0.50 m wide.
Modifications	-
Floor	-
Furnishings	East of wall bm were two successive hearths of unclear date. Against the western side of wall be was a pit, which was filled with small stones, and at the bottom were two layers of winkle shells. In the northeastern section, remains of a north-south running drain were found.
Finds	From area D came quite some obsidian. Also the drilling of stone tools. No MH ceramics were listed by Taylour 1972.
Activities	Unclear
Date	MH II
References	Taylour 1972: 244; Taylour and Janko 2008
Illustration	After Taylour 1972, figure 13

Ho4 Agios Stephanos house Lambda I	
Preservation	Poorly preserved due to Medieval building activities. Also only a small section was uncovered during excavations.
Desertion	Abandoned
Orientation	NE–SW
Lay-out	Rectangular? At least two rooms.
Size	Unclear, 3.50 m wide
Walls	Made of small stones, irregularly placed. Side walls 0.45 m wide. Partition walls 0.30–0.45 m wide.
Modifications	Destroyed by fire (floor 10) during MH III, but reconstructed. Refurbished several times, as three successive floors were identified.
Floor	Earth floor?
Furnishings	-
Finds	Floors 9, 10 = MH III early–late: fragments of a goblet, lustrous decorated jar, one handled cup, jar, pithos, and rounded cup. Stone drill core. Floors 7, 8 = LH I Early: two carinated cups, hole mouthed jar, terracotta spool, 4 terracotta toy boats (?), stone pestle, obsidian blade, obsidian projectile point. Floors 4a, 4b, 6 = LH I/IIA: fragments of a flask, goblet, matt painted jar, terracotta whorl and spool.
Activities	Presumably all household activities.
Date	MH III Early–LH IIA
References	Taylour and Janko 2008
Illustration	After Taylour and Janko 2008, figure 1.49

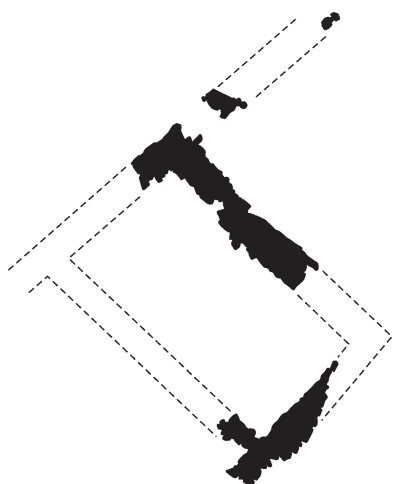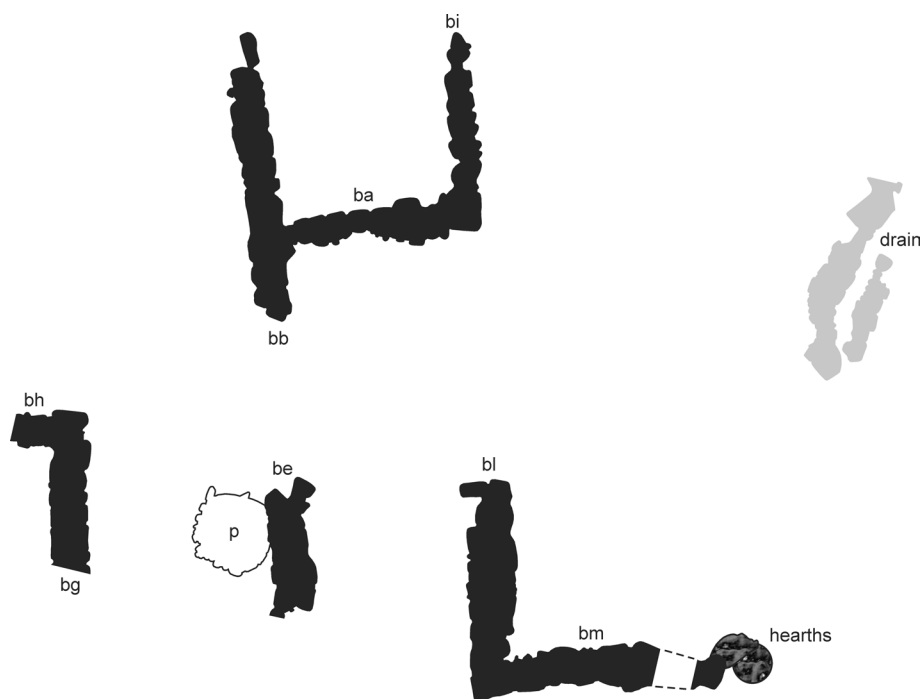

Ho5 Agios Stephanos house Lambda II	
Preservation	Poorly preserved. Only a section of the whole building was uncovered.
Desertion	Presumably deserted?
Orientation	E–W
Lay-out	Rectangular, at least nine agglomerated rooms and a courtyard or street.
Size	At least 28 m ² was uncovered. Room 5: 4.00+ x 1.55 m Room 6: unclear Room 7: 2.60 x 1.95 m Room 8: 1.75 x 2.70 m Room 9: 4.40 m in length Room 10A: 1.75 m in length Room 10B: 1.65 x 5.15 m before partition Room 10 B: 1.65 x 2.20 m after partition Room 10 C: 1.25 x 2.40 m Room 11: Unclear
Walls	Various constructions, but overall irregular laid two rows of stones with smaller stones in between. Ranging from 0.30-0.70 m in width and 2-5 courses high preserved.
Floor	Floors are barely reached, because excavations had to be suspended. Sometimes two floors are identified in a room. In room 7 the floor was made of mud bricks and white earth.
Furnishings	At floor 9 a hearth is located, but it is unclear where exactly.
Modifications	Walls 1c and 1e of room 10A are said to be LH I (–IIA) in date, constructed after burning took place in this section during MH III/LH I, thereby creating rooms 10A and 10B and a floor. At the same time, thin slabs were used at the doorways from room 10B to room 6, and from room 10C to the courtyard/street. Perhaps a gradual expansion of the house took place. Apparently, some wall collapse and localized burning took place during MH–LH I.
Finds	In lower MH III–early layer remains of a clay crucible with traces of tin bronze Room 5, terracotta conulus and a stone pounder (MH–LH I) Room 6: Matt Painted Bichrome cup (LH I–IIA) Room 7: goblet (wash, LH I–IIA) Room 8: goblet and Minoan jar (both wash, LH I–IIA) Room 9: two jars, a basin and a large goblet (MH III–LH I) Room 10A: hydria (LH I–IIA) Room 12: sling stone, steatite seal (MM II–III), stone pounder South, wash: two obsidian blades, and a stone tablet with Linear A (MM III–LM I)
Activities	Presumably all household activities?
Date	MH III Late–LH IIA (described architecture and finds, though longer use of the house is attested)
References	Taylor and Janko 2008
Illustration	After Taylor and Janko 2008, figure 1.43

Ho6 Agios Stephanos house Nu II	
Preservation	Reasonably well preserved.
Desertion	The house collapsed during LH I, without signs of burning. Perhaps the destruction was due to an earthquake.
Orientation	Roughly N–S orientation, with entrance perhaps in the south.
Lay-out	Rectangular, at least two closed rooms: room 1 in the north and room 2 in the south. Perhaps these rooms were were basement rooms, as no entrance could be identified.
Size	Inside overall size is ca. 7 m ² Room 1: ca. 2.04 m ² (1.70 x 1.20 m) Room 2: ca. 4.68 m ² (1.95 x 2.40 m)
Walls	Irregular, two rooms of irregular sized stones with smaller stones in between. A section of the western wall was made of tiny stones, just like to stone bench in room 2. Walls were 0.35-0.58 m wide, and 2-5 courses high preserved.
Floor	Earthen floor
Furnishings	In the southern room was a hearth built against the partition wall, and a bench (1.65 x 0.35-0.40 m) in the southwestern corner, against the west wall.
Modifications	The bench was constructed inside the house during LH I.
Finds	Northern room 1: obsidian core, beak spouted jug and a conical cup Southern room 2: 2 kantharoi, a copper punch and a terracotta whorl
Activities	Presumably all household activities.
Date	MH III–LH I
References	Taylor and Janko 2008
Illustration	After Taylor and Janko 2008, figure 1.61

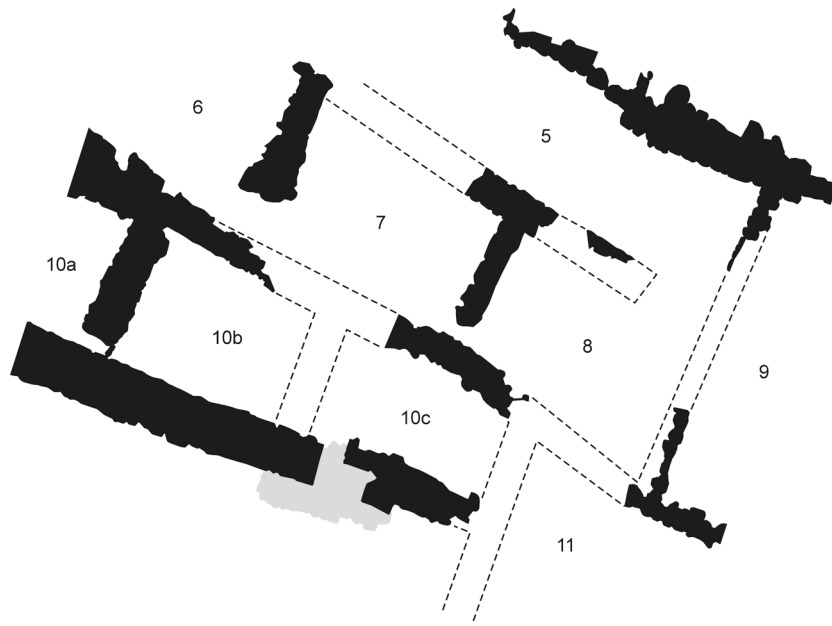


Catalogue J Messenia

J01 Derizitiotis Aloni house AB

Preservation	Poorly preserved. Only part of the apse was uncovered, which is overbuilt by house M.
Desertion	Destroyed (unknown cause) and briefly abandoned.
Orientation	NE–SW, apse in north-east.
Lay-out	Apsidal, at least two rooms.
Size	Preserved section ca. 20+ m ² Apse: 2.15 x 4.30 m Main room: 4.30+ x 11.20 m
Walls	Walls were made of irregular laid, medium sized poros stones, one course preserved. Preserved width of the walls was 0.55–0.60 m. Preserved width of the partition wall was 0.30–0.40 m.
Modifications	Another floor seems to predate to pebble floor. However, this floor is not specifically associated with an earlier use phase of the house; instead earlier EH II habitation is suggested.
Floor	Possible pebble floor.
Features	Two horseshoe shaped structures made of pithos sherds were located in the main room. The southernmost one contained red-burnt clay in the centre, but the pithos sherds did not show traces of burning. Perhaps heated stones were put in the centre, to boil water. A possible hearth or platform was located in the apse.
Finds	Fragments of: 2 bowls, 6 cooking pots, 2 cups, 24 cup/bowl, 15 jars, 16 pithoi, 2 wide mouthed jars, 1 closed shape and 13 open shapes, and 29 unidentified sherds. Small finds: 3 pounders/grinders, flint flakes, terracotta button, spindle whorl, denticulate (and boar tusk?).
Activities	Presumably all household activities. The apse was probably used for storage considering pithos fragments recovered here.
Date	EH III–MH I
References	Stocker 2003, 2004, Rutter 2007
Illustration	After Stocker 2003, figure 2



J02 Derizitiotis Aloni house M

Preservation	Poorly preserved, due to erosion. Only part of the apse was uncovered.
Desertion	Presumably deserted?
Orientation	NE–SW, apse in north-east.
Lay-out	Apsidal, at least one room.
Size	Preserved section ca. 13+ m ² 4.30+ x 4.30+ m
Walls	The walls were made of irregular laid and unworked poros limestone blocks, one course high. Preserved width was 0.50 m.
Modifications	-
Floor	There was no conclusive evidence for the floor of the house.
Features	-
Finds	Fragments of: 2 cooking pots, 5 cup/bowl, 1 goblet, 8 jars, 9 pithoi, 3 closed shapes and three open shapes and 11 unidentified sherds. Small finds: three spindle whorl (?), pounder/grinder, flint blade, stone spool/pestle, flint denticulate, obsidian fragments, saddle quern, shaft-hole hammer axe.
Activities	Presumably all household activities. Apse was probably used for storage considering pithos fragments recovered here.
Date	EH III–MH I
References	Stocker 2003, 2004, Rutter 2007
Illustration	After Stocker 2003, figure 2

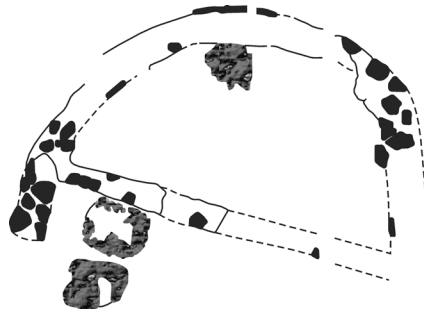



Jo3 Koukounara	
Preservation	Moderately well preserved, if not completely preserved.
Desertion	Presumably deserted?
Orientation	W–E
Lay-out	Ellipsoid, at least two rooms/areas.
Size	Ca. 59 m ² . The width of the house is 5.50 m, and the maximum length from the north-eastern corner to the south-western corner is 10.80 m.
Walls	Deep foundations, but no further details on construction. Ca. 0.40–0.60 m wide.
Modifications	The house had at least two habitation phases.
Floor	No traces of a floor were found.
Features	A column base was found, but not in situ (not indicated in the plan). Area A was full of small and larger stones (it is unclear if the diagonal row of stones on the plan is meant with this).
Finds	Room 3: (selection) 2 goblets, a ladle?, four Keftiu cups, large open vessels, four plain goblets, jug or jar, plain conical cup?, jug or alabastron. Area A: (selection) four plain goblets, open vessel, two other vessels, two Keftiu cups, a closed large vessel. Small finds: two steatite spindle whorls, one clay spindle whorl, stone tools, and two bronzes.
Activities	Presumably all domestic activities.
Date	LH I–LH II
References	Lolos 1987
Illustration	After Lolos 1987, figure 27

Jo4 Nichoria building 1	
Preservation	Poorly preserved. Disturbed by ploughing. The north-western section was not excavated as it is lying on another property.
Desertion	Abandoned, as dump was found inside the house.
Orientation	NW–SE
Lay-out	The excavators argued for an apsidal layout, with the apse in the NW. This is not substantiated by the material in my opinion.
Size	Preserved section ca. 29 m ² 9.50 x 3.00 m
Walls	The walls were made of two rows, of rounded water worn stones of varying size, filled in with smaller stones, two-six courses. 0.50–0.72 m in width.
Modifications	-
Floor	Floor of yellow marl, which came up to the height of the foundations.
Features	None mentioned for the interior of the house. However, southwest of the house hearths were uncovered: two horse-shoe shaped hearths, and fragments of a third, and one small rectangular hearth. Ash pits were located north-east, and a bothros and a pit towards the southeast.
Finds	A few sherds on the floor, which seem to be post-depositional
Activities	Presumably all domestic activities. Though, it is suggested that it might have been a working area for metallurgy
Date	MH I
References	McDonald and Wilkie 1992
Illustration	After McDonald and Wilkie 1992, figure 2-1

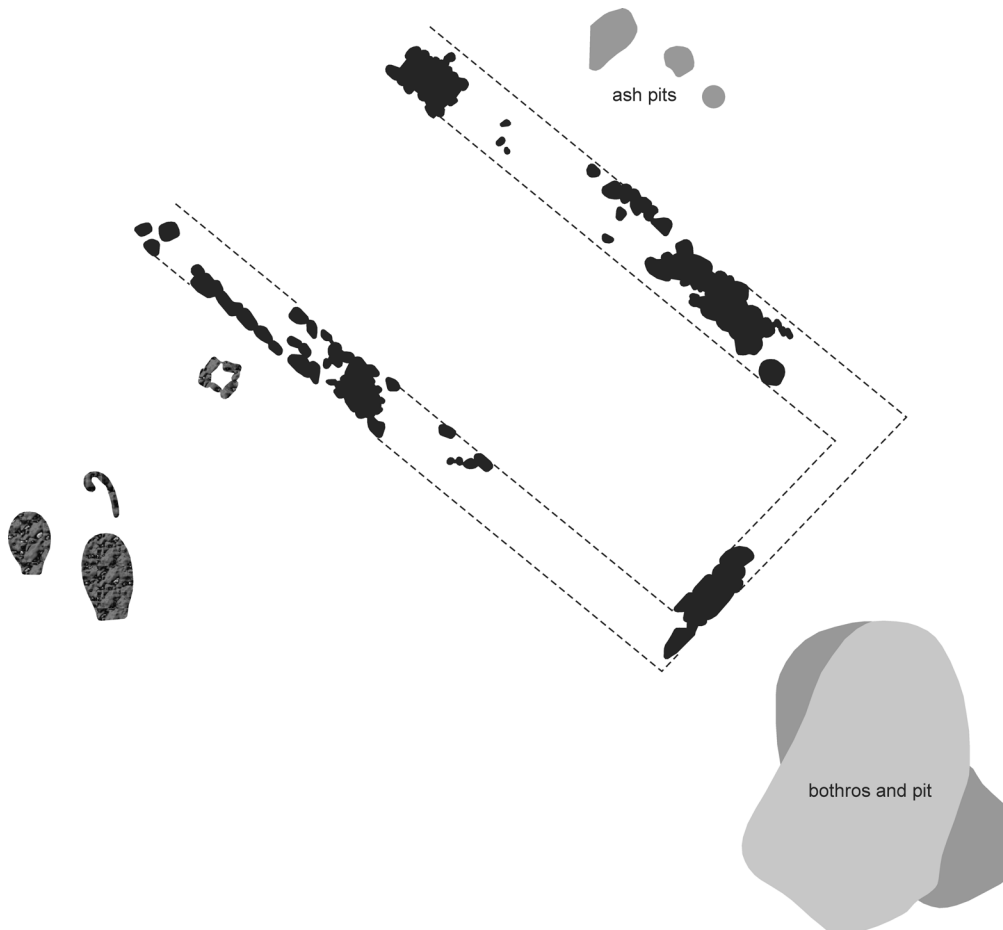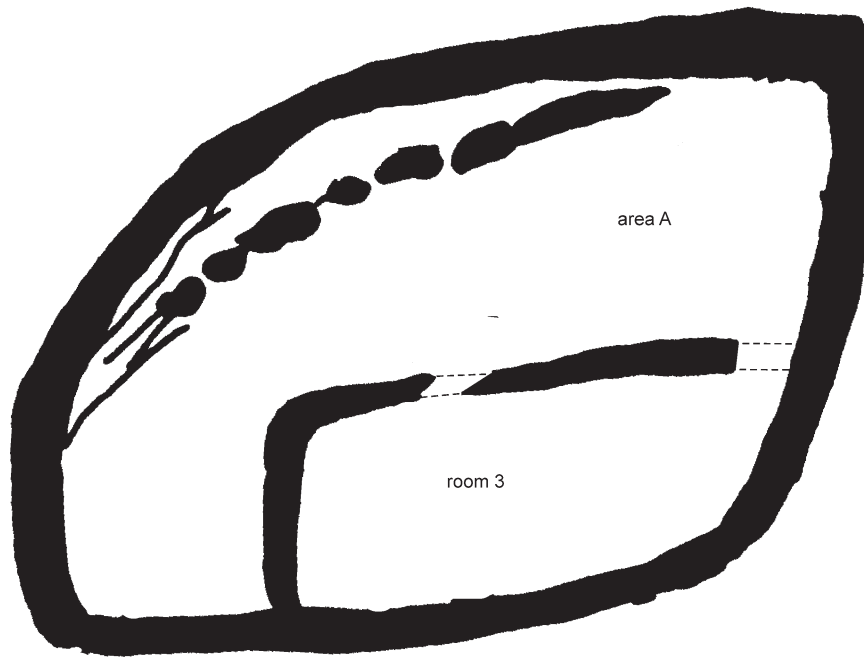

Jo5 Nichoria building 2	
Preservation	Poorly preserved, but also barely uncovered.
Desertion	Possibly destroyed by fire, considering the uncovering of the top of a destruction deposit, with indications of heavy burning.
Orientation	NE–SW?
Lay-out	-
Size	Uncovered area measured 4.00 x 1.90 m .
Walls	Two closely packed stone rows, ca. 0.70 m wide.
Floor	Unclear, because the house was not excavated until the floor of the MH I layer.
Features	-
Modifications	-
Finds	A destruction deposit was identified, but not further excavated. West of wall G were many fragments of a large coarse vessel with incised decoration. The only other find is a fragment of a crucible.
Activities	Unclear, as too little is uncovered.
Date	MH I
References	McDonald and Wilkie 1992
Illustration	After McDonald and Wilkie 1992, figure 2-1

Jo6 Peristeria East house	
Preservation	Partly destroyed by a later erected tholos tomb.
Desertion	The house appears to have been destroyed when the tholos tomb was built.
Orientation	N–S, entrance in the S.
Lay-out	Rectangular-shaped, but irregular. At least one room and part of a second one are uncovered, but there must have been more.
Size	Preserved / uncovered section ca. 5+ m ² Southern room ca. 1.30 x 1.00 m Northern room ca. 1.9+ x 1.8+ m
Walls	The walls were made of stone rubble, presumably set in clay. Some sections were preserved for up to 1 meter high.
Floor	No details mentioned. But Vermeule (1964) mentions that floors at Peristeria were generally made of beaten earth stiffened with pebbles or clay.
Features	Under the floor remains of seven cist burials with child graves were located (not indicated in the plan).
Modifications	No details mentioned. But Vermeule (1964) mentions that no house at Peristeria had more than two stratified floors, and most had only one.
Finds	Matt painted ceramics with linear decoration, a stamnos/small pithos (in situ) with inside it a two-handled skyphos and four clay spindle whorls. Furthermore, a pattern painted Keftiu cup. Possibly also seashells. Ceramics from the fill of the east house room 2 are investigated by Lolos (1987). The great majority consists of coarse and fine plain ware, such as goblets, kantharoi, Keftiu cups, open vases and large closed vessels. Identified were also a fragment of a Depas Amphikypelon, Coarse incised (Adriatic) sherds, a few Matt Painted sherds, including of a jug and a large closed vessels, and decorated Keftiu cups, an alabastron and a squat jug.
Activities	Possibly all household activities.
Date	Late MH–early LH IIA
References	Lolos 1987: 42-48; Vermeule 1964: 117
Illustration	After Lolos 1987, figure 55

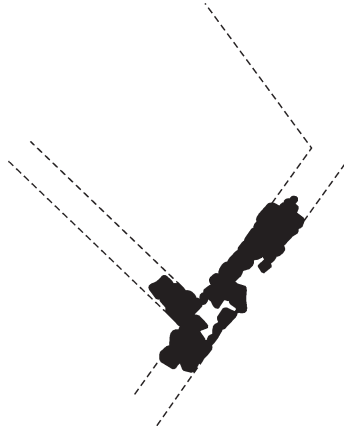


Jo7 Peristeria North house	
Preservation	-
Desertion	-
Orientation	-
Lay-out	In photo seemingly rectangular.
Size	-
Walls	-
Modifications	The house showed traces of a second, slightly later, alteration.
Floor	-
Features	From the floor of the house came two cist graves with child burials.
Finds	No finds were published.
Activities	Unclear, as no details were published.
Date	LH I
References	Marinatos 1960; Vermeule 1964: 117; Lolos 1987: 42
Illustration	-



Catalogue K Elis



K01 Kavkania	
Preservation	Poorly preserved. The whole western section is not preserved due to erosion and stone robbing.
Desertion	Destroyed by fire.
Orientation	NE-SW, entrance in the north-east.
Lay-out	Possibly rectangular, preserved are an entrance area and a section of a room.
Size	The sidewall was at least 6 m long.
Walls	The sidewall was only one stone row wide, set in mud, five courses high, 0.20-0.35 m wide. The partition wall was made of one or two stone rows, one to two courses high, 0.45-0.55 m wide and preserved to 0.38 m high.
Floor	Made of a mixture of marl or shell lime plates, which is quite unusual.
Features	-
Modifications	Before the fire destruction, some stones of the floor were removed, and a hydria and stamnos were inserted in the floor. Perhaps the room or building was used for a while as storage.
Finds	1243 sherds among which fragments of bowls, closed vessels, cooking pot, kantharoi, goblets, narrow necked jar, pithoi, storage vessels and a wide mouthed jar. Small finds: terracotta spool, two flint blades, a stone rubber, millstone, stone spindle whorl, stone chisel, stone figurine, stone with Linear B inscription.
Activities	Possibly all domestic activities, though a ritual function has also been suggested.
Date	MH III
References	Arapojanni, Rambach and Godart 2002
Illustration	After Arapojanni, Rambach and Godart 2002, figure 5

K02 Olympia house 2	
Preservation	Moderately preserved, part of the northern and western sections is missing.
Desertion	Fire destruction, later overbuilt by an MH structure.
Orientation	NE-SW, apse in the south-west, possible entrance in the north-east.
Lay-out	Apsidal, two rooms
Size	Total size of the house is at least 42+ m ² . Width varies from 3.60-4.00 m. Apse: 1.70 x 4.00 m Main: 9.20+ x 3.80 m
Walls	Two rows of round stone, filled with other stones, on top of which were placed flat stones. The preserved foundation is at least 2-4 courses high. Partition wall only two rows of stones. The walls are ca. 0.40 m wide.
Floor	Earth floor?
Features	-
Modifications	-
Finds	Askos, three bowls, seven cups, a handle, a jug, two kantharoi, a spindle whorl and an obsidian nucleus.
Activities	Presumably all household activities.
Date	EH III
References	Dörpfeld 1938: 85-87; Weege 1904; Rambach 2001, 2002, 2004
Illustration	After Dörpfeld 1938, figure 9

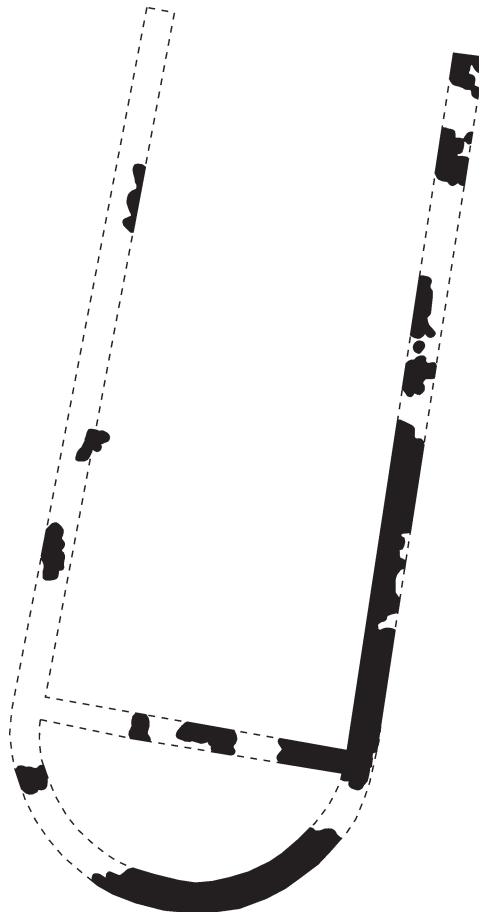


Ko3 Olympia house 3	
Preservation	Reasonably preserved, part of the northern section is missing.
Desertion	Fire destruction
Orientation	NE-SW, apse in the south-west, possible entrance in the north-east.
Lay-out	Apsidal, one room
Size	Total size as preserved 35+ m ² . Inner width ranges from 3.25-3.70 m, length is over 10.00 m.
Walls	Ca. 0.50 m wide. Generally two rows of rounded stones filled with smaller stones in between. Twice one large sand stone is placed on the wall in the section of the apse.
Floor	Earth floor.
Features	-
Modifications	-
Finds	Amphora, askos, three bowls, three cups, two jugs, a kantharos, a lid, five pithoi and five tankards. Three stone axes, two stone knives, a polish stone, a stone saw and three terracotta spindle whorls.
Activities	Presumably all household activities.
Date	EH III
References	Dörpfeld 1938: 81-84; Weege 1904; Rambach 2001, 2002, 2004
Illustration	After Dörpfeld 1938, figure 7

Ko4 Olympia house 4	
Preservation	Presumably completely preserved.
Desertion	Seemingly deserted and reused during MH.
Orientation	E-W, apse in the east, entrance in the west.
Lay-out	Apsidal, one room
Size	Ca. 12 m ² (4.10 x 2.90 m)
Walls	Ca. 0.50 m wide, made of rounded stones, and only preserved for one course high. The stones were placed in 2, 3 or 4 rows, whereby at the inner face larger stones were used.
Floor	Earth floor?
Features	Stone bench along the northern wall, which is made of two rows of stones.
Modifications	Apparently reused during the MH period. It is unclear at what point during EH III the stone bench was constructed.
Finds	-
Activities	Possible ritual activity.
Date	EH III
References	Dörpfeld 1938: 90-92; Weege 1904; Rambach 2001, 2002, 2004
Illustration	After Dörpfeld 1938, figure 13

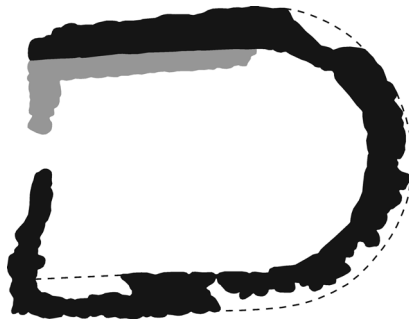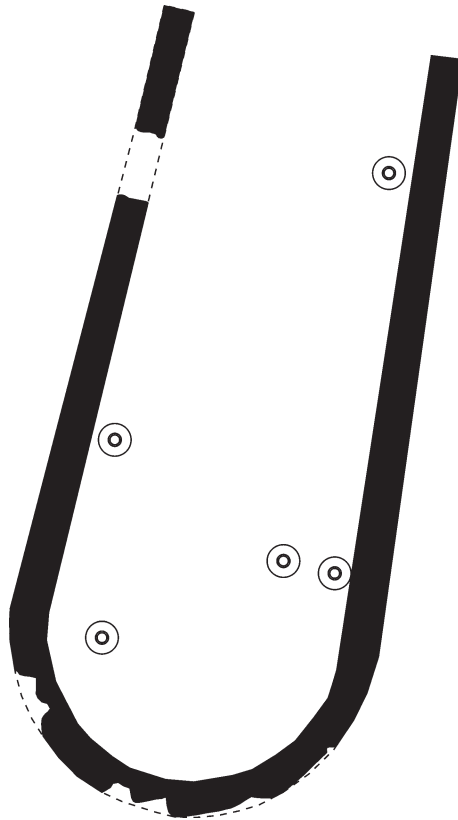


Ko5 Olympia house 5	
Preservation	Poorly preserved.
Desertion	Fire destruction, and later overbuilt by an MH structure.
Orientation	NE-SW, apse in the SW, entrance possibly in the NE.
Lay-out	Apsidal, at least two rooms
Size	At least 32+ m ² uncovered Apse: 1.70 x 3.35 m Main room: 7.80+ x 3.35 m
Walls	Ca. 0.50 m wide. Two rows of rounded stones, and in between filled with smaller stones. Partition wall is made of very small stones, and perhaps added later.
Floor	Earth floor?
Features	-
Modifications	-
Finds	An askos, and two cups from the apse. Sherds, a stone hammer and a terracotta spindle whorl.
Activities	Presumably all household activities.
Date	EH III
References	Dörpfeld 1938: 87-88; Weege 1904; Rambach 2001, 2002, 2004
Illustration	After Rambach 2002, figure 14

Ko6 Olympia house 6	
Preservation	Poorly preserved, only the apsidal northern section is recovered.
Desertion	No details provided, perhaps deserted?
Orientation	N-S, apse in the north.
Lay-out	Apsidal, one room
Size	At least 8+ m ² uncovered (3.00+ x 2.50 m).
Walls	Two rows of rounded stones set in clay, here and there filled in with smaller stones. Ca. 0.30-0.35 m wide.
Floor	Earth floor?
Features	-
Modifications	-
Finds	An askos and two kantharoi from the apse. A terracotta spindle whorl.
Activities	Presumably all household activities?
Date	EH III
References	Dörpfeld 1938: 89-90; Weege 1904; Rambach 2001, 2002, 2004
Illustration	After Dörpfeld 1938, figure 11

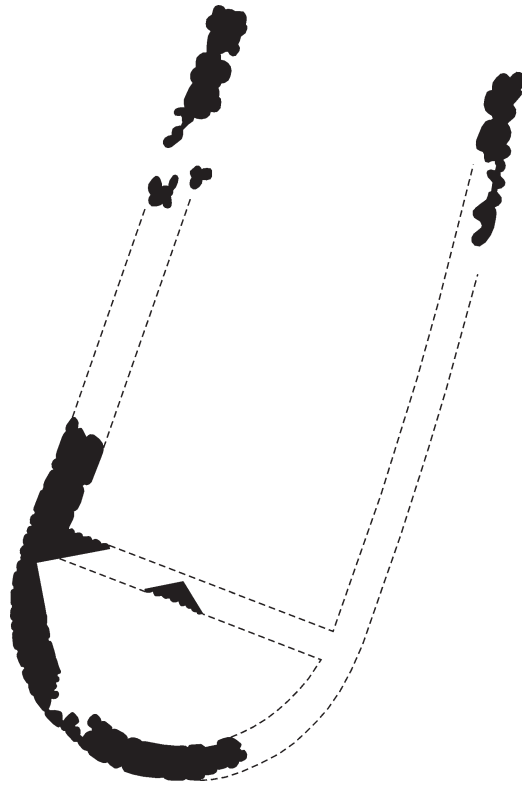



K07 Olympia MH house	
Preservation	Poorly preserved and only partially uncovered.
Desertion	Presumably deserted?
Orientation	NE-SW?
Lay-out	Irregular, angular
Size	Circa 15+ m ² uncovered (5.10 x 3.00 m).
Walls	Ca. 0.60 m wide. Two rows of larger stones with smaller stones as fill in between.
Floor	-
Features	It was unclear to me if stones along the eastern wall formed a platform, or were perhaps part of an outbreak of the wall.
Modifications	-
Finds	Sherds of Adriatic ware and a Minyan kantharos.
Activities	Unclear, as few finds are recovered.
Date	MH I
References	Rambach 2010
Illustration	After Rambach 2002, figure 14

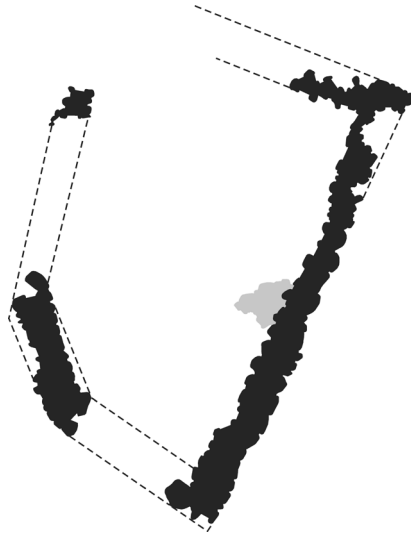

Catalogue L Arcadia



Lo1 Asea house A	
Preservation	Poorly preserved, only part of the southern section was preserved.
Desertion	Destroyed by fire. Later built upon by MH houses with a different orientation.
Orientation	N–S
Lay-out	Presumably rectangular and at least two rooms.
Size	Preserved and uncovered section ca. 19+ m ² Northern room: 3.50+ x 4.35 m Southern room: 0.95 x 4.45 m
Walls	The walls were probably between 0.55–0.70 m wide.
Modifications	-
Floor	Probably earth floor (possibly strewn with sand and/or partly paved with potsherds).
Furnishings	-
Finds	In the partitioned southern room, a sauceboat filled with charred peas was recovered. Shelled and clean acorns were found. Five small vessels, which were mostly of thin, fine biscuit, were found in the main room. Among the finds were serving/table vessels, foodstuffs and vessels of unclear type/function.
Activities	Presumably all household activities.
Date	EH III late
References	Holmberg 1944: 8–12
Illustration	After Holmberg 1944, figure 7

Lo2 Asea house K	
Preservation	Poorly preserved, only part of the eastern section was preserved.
Desertion	Destroyed by fire. Later built upon by MH houses with a different orientation.
Orientation	NW–SE
Lay-out	Reconstructed as rectangular by Holmberg (1944: Fig. 8), but in Pl. VI another wall was located towards the north-west, perhaps belonging to the house.
Size	Preserved and uncovered section ca. 19+ m ² Northern apse: 1.70 x 2.5+ m Southern room: 5.90 x 2.5+ m
Walls	0.40 m wide walls.
Modifications	-
Floor	Small thin slabs of schist were stamped into the floor.
Furnishings	-
Finds	-
Activities	Presumably all household activities.
Date	EH III late
References	Holmberg 1944: 8–12
Illustration	After Holmberg 1944, figure 8 and Pl. VI

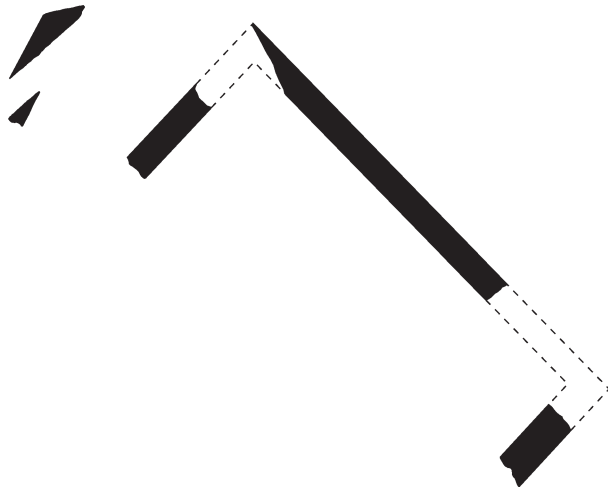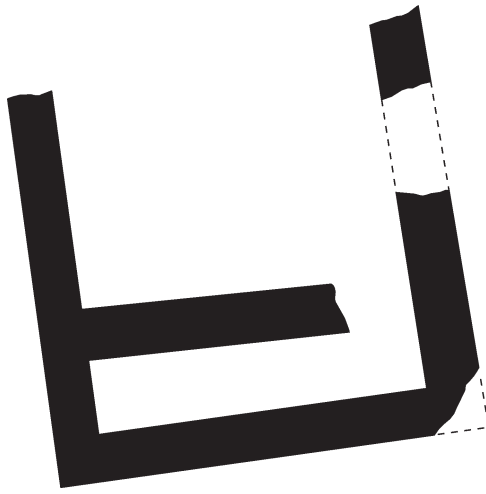



Lo3 Asea house B	
Preservation	Moderately well preserved. Several wall sections were missing, and the eastern section was not preserved.
Desertion	Presumably deserted?
Orientation	E–W
Lay-out	Rectangular, at least two or three rooms.
Size	Western room 1.50 x 3.10 m Central room 2.00 x 3.10 m Eastern room 3.00+ x 3.10 m Preserved section ca. 20+ m ²
Walls	-
Modifications	-
Floor	Earth floor, no paving.
Furnishings	Remains of ashes (hearth?) in the southwestern corner of the eastern room.
Finds	Ten coarse vessels in the area of the ashes, including three two-handled bowls and a one-handled cup of the Red-Brown-Black coarse ware category. Some of the vessels were placed in one another.
Activities	Among the finds were serving/table vessels, and the hearth indicates heating/cooking. As such, presumably all household activities were carried out.
Date	MH I
References	Holmberg 1944: 12-17
Illustration	After Holmberg 1944, figure 13

Lo4 Asea house L	
Preservation	Moderately well preserved, some sections of walls were not preserved.
Desertion	The remains were covered with an ash layer, suggesting destruction by fire of the house. Later built upon by house N.
Orientation	NW–SE
Lay-out	Rectangular, four rooms, but the partition walls are not placed very straight between the side walls, creating irregular shaped rooms.
Size	Preserved section ca. 43+ m ² . From north to south the rooms measured: room 1: 2.20 x 3.50 m room 2: 2.80 x 3.50 m Room 3: 4.00 x 3.50 m Room 4: 3.25 x 3.50 m
Walls	-
Modifications	-
Floor	The floor was made of stamped earth.
Furnishings	-
Finds	-
Activities	Presumably all household activities.
Date	MH I
References	Holmberg 1944: 12-17
Illustration	After Holmberg 1944, figure 17

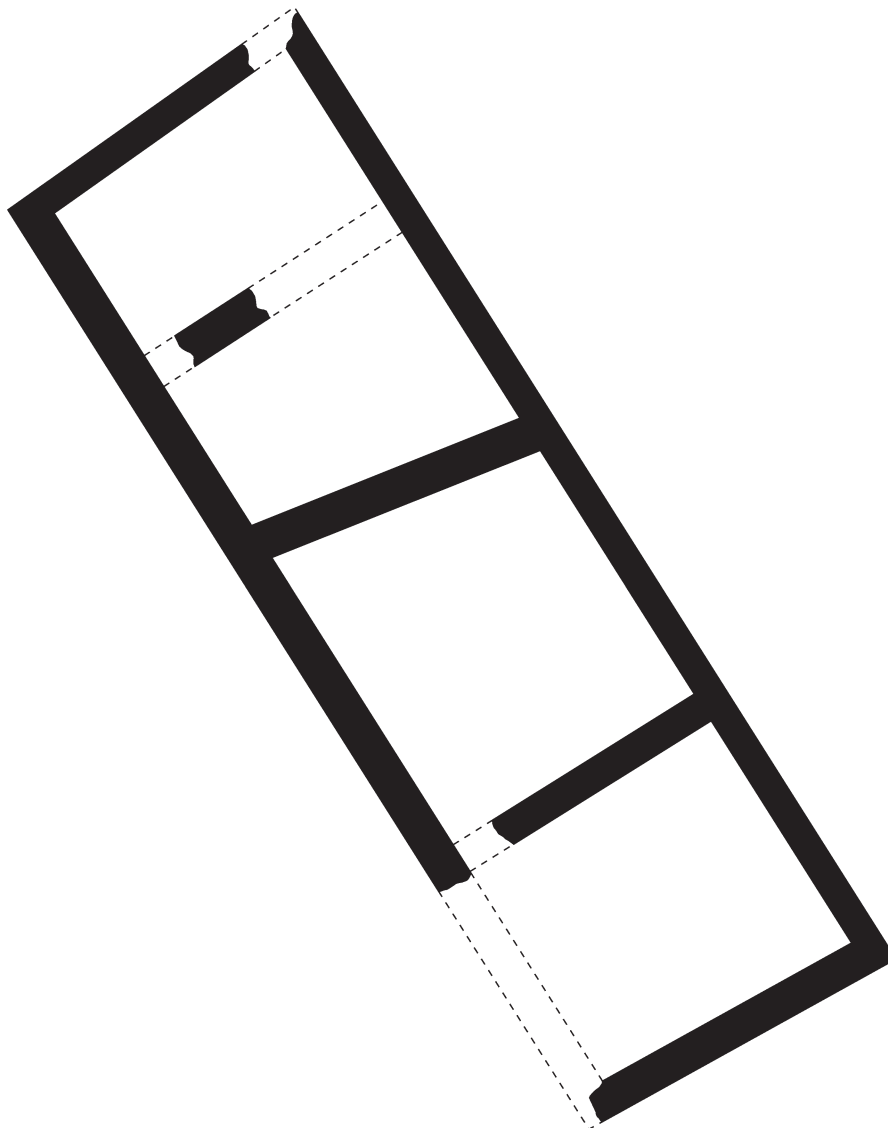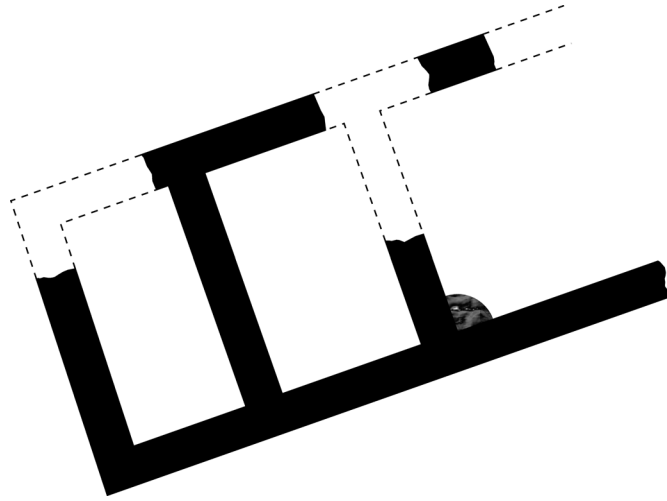


Lo5 Asea house O	
Preservation	Poorly preserved.
Desertion	Presumably deserted? Subsequently built upon by house P.
Orientation	NW–SE
Lay-out	Rectangular, two rooms.
Size	Total house ca. 40 m ² Northern room 3.30 x 3.10 m Southern room ca. 8.30 x 3.50 m
Walls	-
Modifications	-
Floor	Floor was made of stamped earth and covered with sand.
Furnishings	-
Finds	In the southern room fragments of a large coarse Yellow Minyan bowl were found.
Activities	Dining is indicated by the one bowl ascribed to the house.
Date	MH I
References	Holmberg 1944: 12-18
Illustration	After Holmberg 1944, figure 18


Lo6 Asea house F	
Preservation	Poorly preserved, part of the northwestern and eastern section was not preserved.
Desertion	Presumably deserted? Eventually built upon by later walls.
Orientation	E–W, entrance perhaps in the east.
Lay-out	Irregular, but rectangular-like to trapezoidal rooms, at least two rooms.
Size	Preserved section ca. 30+ m ² Western room ca. 4.00 x 3.50 m Eastern room ca. 3.50 x 4.50 m
Walls	-
Modifications	-
Floor	Both rooms had a 0.03 m thick layer of yellow sand on the floor.
Furnishings	A round built-up hearth was located at the place where the southern wall makes a sharp bend. The hearth had a diameter of 1.30 m.
Finds	The sand on the floor was mixed with bones and sherds, other finds were not mentioned.
Activities	The bones and hearth indicate cooking / consumption.
Date	MH II
References	Holmberg 1944: 12-17
Illustration	After Holmberg 1944, figure 15

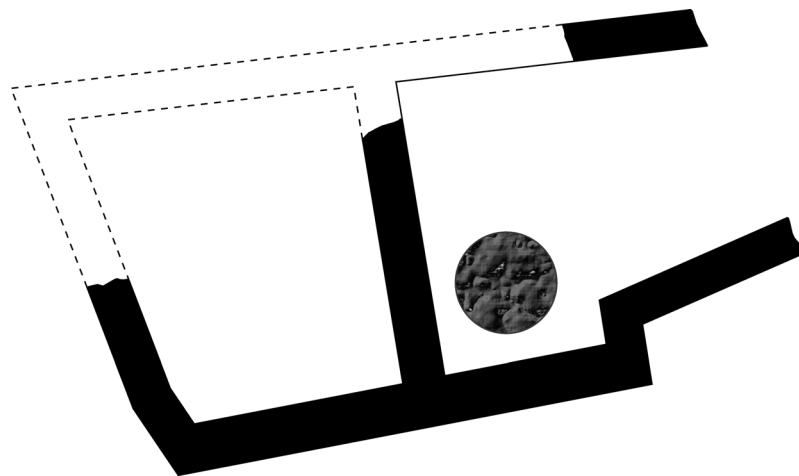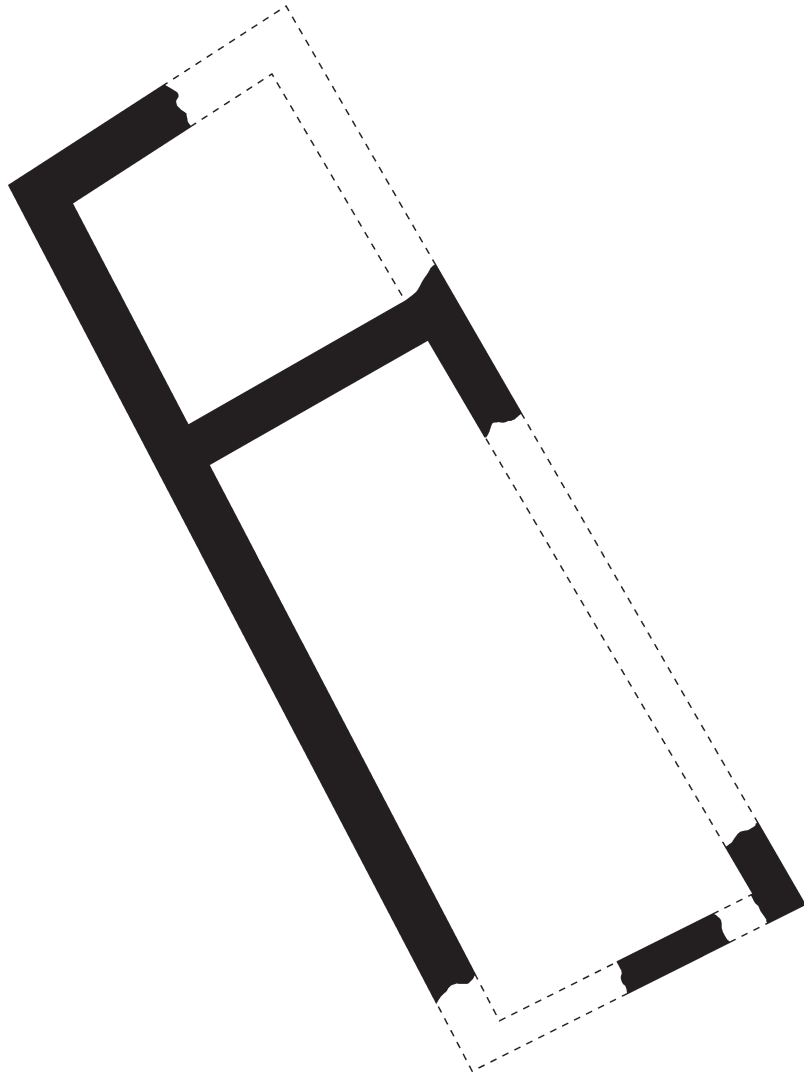

Lo7 Asea house N	
Preservation	Poorly preserved. The whole western part was not preserved.
Desertion	Presumably deserted?
Orientation	NW–SE
Lay-out	Slightly apsidal, at least three to four rooms.
Size	Preserved section ca. 90 m ² (considering that the house was at least 6 m wide) Room 1 ca. 7.00 x 6+ m Room 2 ca. 4.00-4.50 x 6+ m Room 3 ca. 3.00-3.50 x 6+ m Room 4 1+ x 6+ m
Walls	Very thick side walls of 1.1 m in width, but normal sized partition walls. Part of the walls is built of squared, hewn stones, larger stones than at the other houses, and the foundations were presumably higher. The partition walls are 0.40 m wide and not placed straight between the side walls, as also seen at house L.
Modifications	-
Floor	The floor was made of earth, without traces of paving.
Furnishings	-
Finds	-
Activities	-
Date	MH II
References	Holmberg 1944: 12-20
Illustration	After Holmberg 1944, figure 21

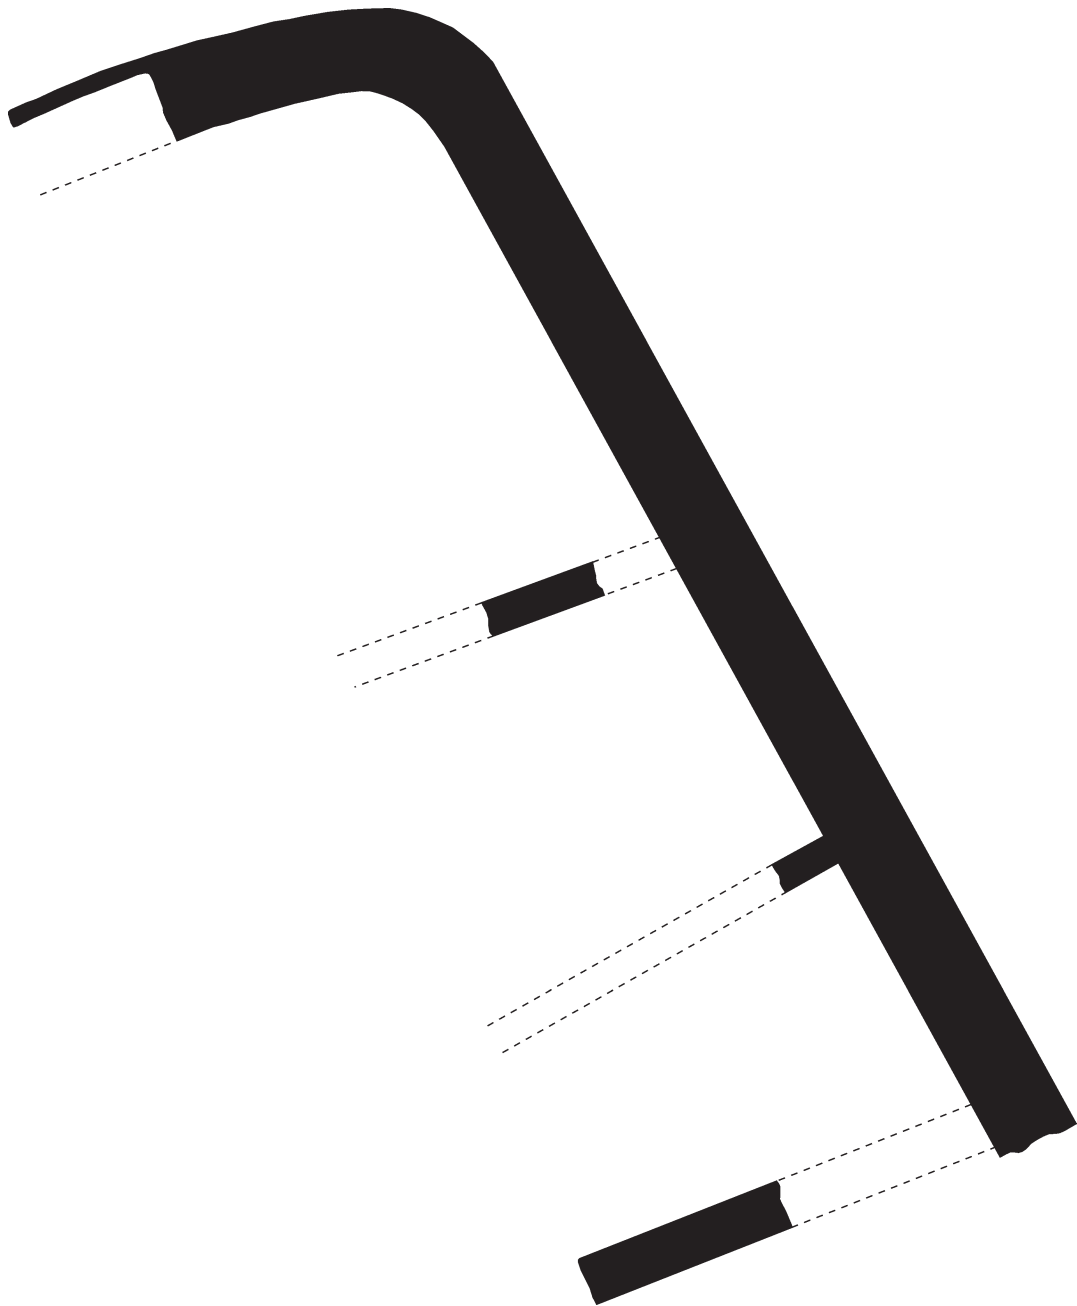


Lo8 Asea house P	
Preservation	Poorly preserved, the northern and southern sections were not preserved and sections of the partition walls were also missing.
Desertion	Presumably deserted?
Orientation	NW–SE
Lay-out	Rectangular, at least two or three rooms.
Size	Preserved section ca. 124 m ² (ca. 8.00 x 15.50 m) Room 1: 3.50 x 6.5+ m Room 2: 7.50-8.00 x 6.50 m Room 3: 2.6+ x 6.7+ m
Walls	Foundations were carelessly made and only one course high. Ca. 0.70 m wide.
Modifications	-
Floor	No special floor paving.
Furnishings	-
Finds	-
Activities	-
Date	MH II
References	Holmberg 1944: 12-20
Illustration	After Holmberg 1944, figure 22

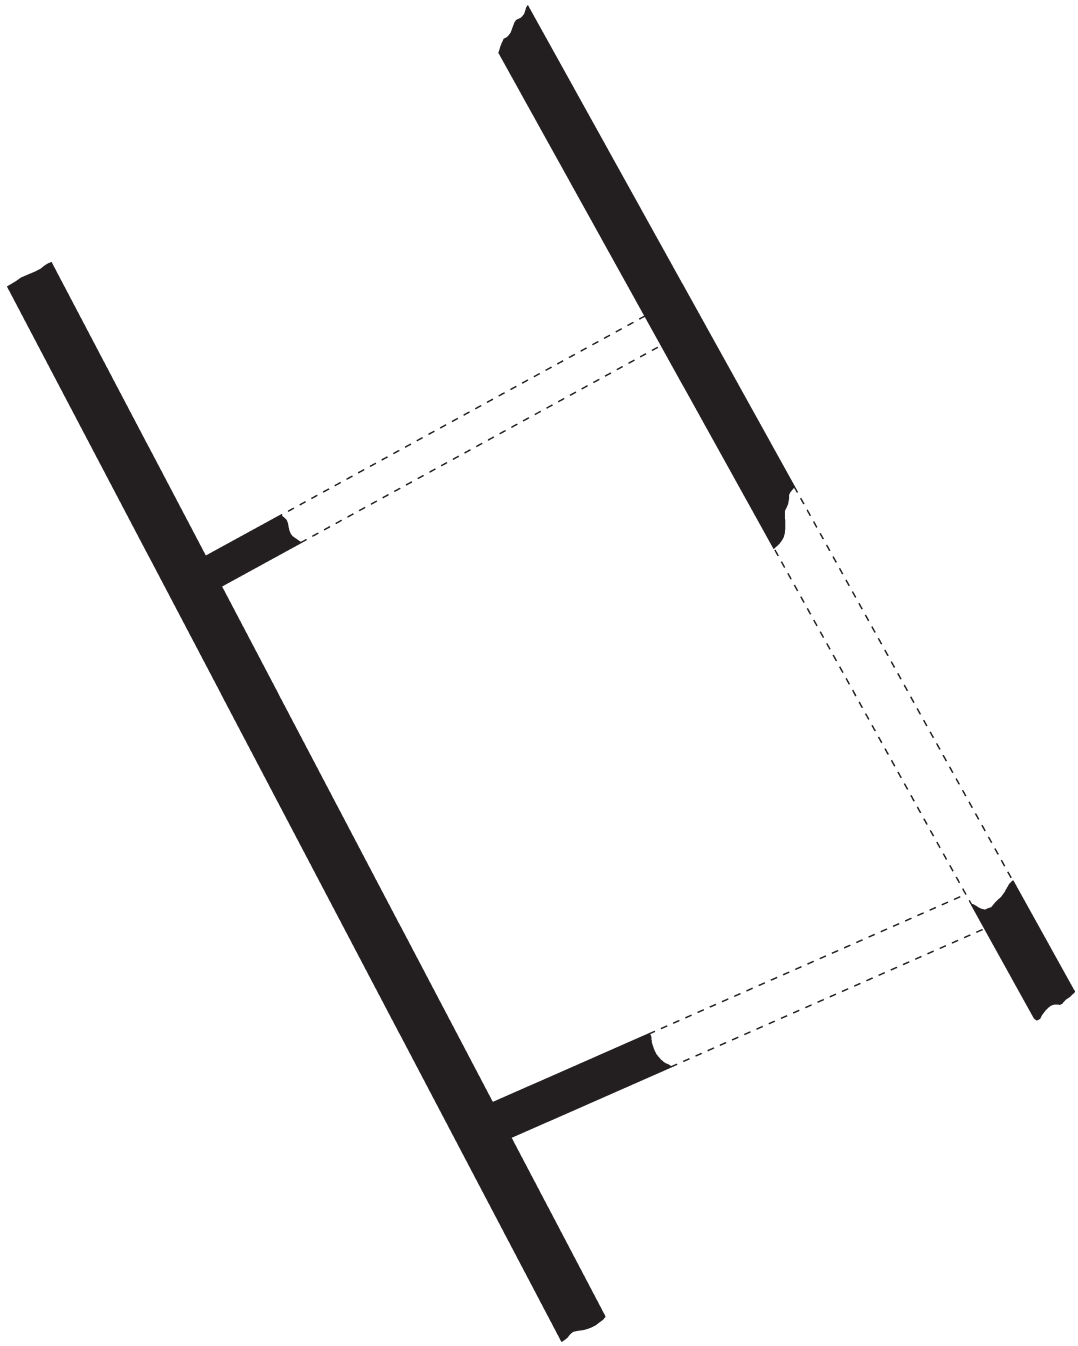

Catalogue M Achaia


Mo1 Aigion MH house	
Preservation	Unclear
Desertion	Fire destruction
Orientation	NE–SW
Lay-out	Rectangular? At least 1 room.
Size	Section of the room measures at least 6.80 m in length and 3.80 m in width. So, overall size of the house uncovered was at least 25.8+ m.
Walls	The walls were made of river stones set in mud. A section was 0.80 m wide, and preserved till a length of 6.80 m and height of 0.57 m.
Modifications	-
Floor	Floor of pebbles and stamped earth.
Furnishings	-
Finds	-
Activities	Presumably all domestic activities.
Date	MH II
References	Papazoglou-Manioudaki 2010, Vordos 1996, Petropoulos 1990, Papazoglou-Manioudaki 1984
Illustration	-

Mo2 Aigion LH I house	
Preservation	Well preserved.
Desertion	Destroyed in LH IIA. The ground plan of the house was subsequently modified in LH IIIB–LH IIIA1.
Orientation	N–S
Lay-out	Rectangular, two rooms.
Size	Total size of 51.8 m ² South room 1: 9.00 x 4.50 m North room 2: 2.50 x 4.50 m
Walls	The walls were ca. 0.50 m wide and preserved until a height of 0.30 m. The walls were made of two courses of unworked medium sized stones and a few pieces of conglomerate.
Modifications	See desertion
Floor	No extensive occupation floor was preserved.
Furnishings	A cist grave and two pit burials were found inside the building, but these were not rendered clearly in the published plan.
Finds	Ceramics such as Aeginetan Matt Painted amphora, Mainland Polychrome and decorated closed vessels, cooking vessels, Lustrous Decorated, decorated and undecorated cups, painted goblets, Aeginetan Matt painted jugs, undecorated kantharoi, krateriskoi, and kraters, red slipped open vessels, ceramics from Central Greece, Matt Painted table ware and transport ware and decorated Vapheio cups.
Activities	Presumably all domestic activities.
Date	LH I–IIA
References	Papazoglou-Manioudaki 2010, Papazoglou-Manioudaki 1982: 149
Illustration	After Papazoglou-Manioudaki 2010, figure 7

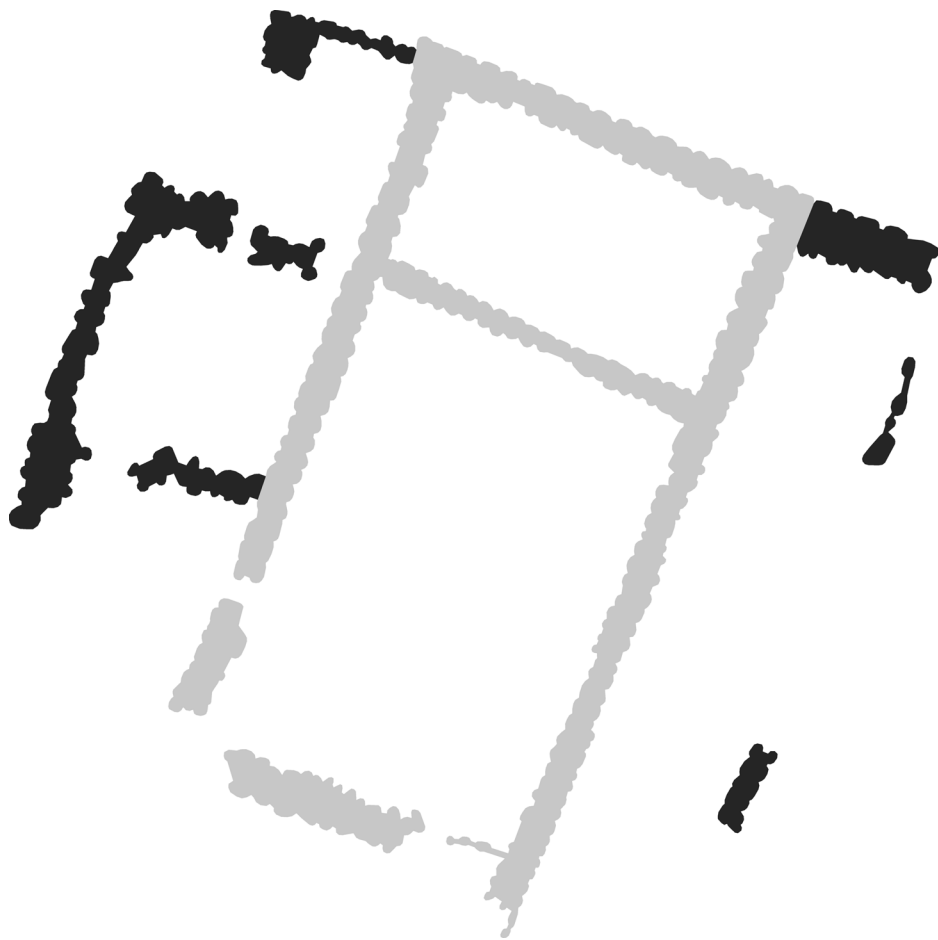

Mo3 Helike house 2	
Preservation	Seemingly well preserved. However, only the eastern side of the building was uncovered.
Desertion	Deserted after earthquake and fire
Orientation	N–S
Lay-out	Presumably rectangular, at least two rooms.
Size	Unclear, but ca. 9 m ² was uncovered.
Walls	Stone foundations were made of two rows of stones, filled in between with smaller stones.
Modifications	Presumably had taken place, such as floor renewal, but not specifically mentioned.
Floor	-
Furnishings	Hearth consisting of a layer of burnt charcoal and baked earth, in room 1. However, this feature was not rendered in the published plan.
Finds	Broken pithos, supported by stones, associated with a bench. EH III storage jars, smaller vases.
Activities	Presumably all household activities.
Date	EH II–III
References	Katsonopoulou 2011b
Illustration	After Katsonopoulou 2011b, figure 16

Mo4 Helike corridor building	
Preservation	Well preserved, but only the northern section was uncovered.
Desertion	Deserted after earthquake and fire.
Orientation	NW–SE
Lay-out	Presumably rectangular, consisting of two corridors and a central area divided into three rooms.
Size	Unclear, but ca. 51 m ² was uncovered Southern corridor: 2.25 x 1.20 m Northern corridor: 3.10 x 1.80 m
Walls	Stone foundations were made of two rows of stones, filled in between with smaller stones.
Modifications	Presumably had taken place, such as floor renewal, but not specifically mentioned. Earlier walls were identified in the plan, but the exact interrelation of older and newer walls was not elaborated on.
Floor	In the eastern side, remains of a pebbled floor were uncovered.
Furnishings	Platform, 0.75 x 0.65 m, made of pottery fragments and cobblestones located along the northern wall. In the plan, it seems that another platform or hearth was located along the western wall.
Finds	Five large pithoi, a great number of medium and small-sized vessels. Numerous items of table and cooking ware. Pottery for food preparation and consumption.
Activities	Presumably all household activities, but in the corridor specifically storage.
Date	EH II–III
References	Katsonopoulou 2011b
Illustration	After Katsonopoulou 2011b, figure 6

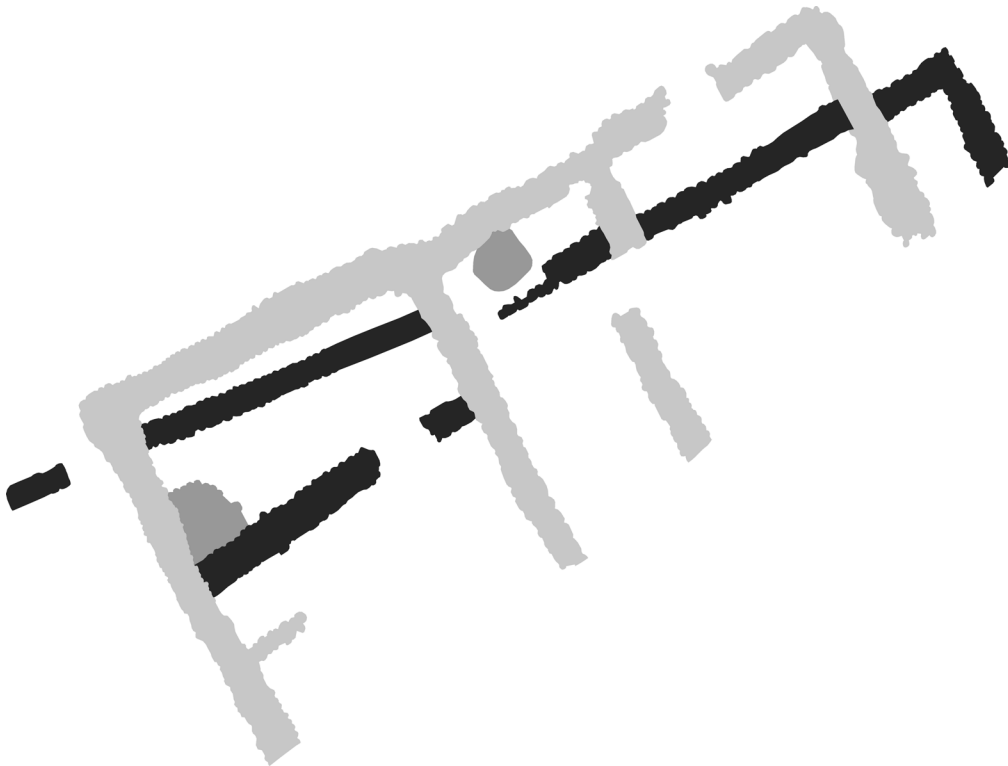

Mos Helike west building	
Preservation	Well preserved, but only the eastern section was uncovered.
Desertion	Deserted after earthquake and fire.
Orientation	NW–SE
Lay-out	Presumably rectangular, at least two rooms.
Size	Unclear, but ca. 18 m ² was uncovered.
Walls	Stone foundations were made of two rows of stones, filled in between with smaller stones.
Modifications	Presumably had taken place, such as floor renewal, but not specifically mentioned. An older wall was located below the house (rendered in black in the plan), but its relation to the west building remains unclear.
Floor	-
Furnishings	-
Finds	Table, storage, and cooking ware. Area 3: 15 items of table and cooking ware: one tankard, several Bass bowls, one cup, three pithoi, one wide-mouthed jar located near the wall. Amphoriskos. Area 4: very little pottery was uncovered here.
Activities	Presumably all household activities
Date	EH II–III
References	Katsonopoulou 2011b
Illustration	After Katsonopoulou 2011b, figure 6

